## IMPORTANT INSTALLATION NOTES:

- FIXTURE TO BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE CODES BY A QUALIFIED ELECTRICIAN OR OTHER PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THIS PRODUCT AND THE HAZARDS INVOLVED.

  FIXTURE(S) MUST BE INSTALLED PRIOR TO CEILING.

  INSURE ALL HANGING POINTS ARE IN LINE WITH THE CENTERLINE OF THE FIXTURE RUN. IF THEY ARE NOT PROPERLY ALIGNED, THE RUN WILL
- NOT HANG STRIAGHT.
- NOT HANG STRIAGHT.

  HANG INDIVIDUAL OR START FIXTURE SECTIONS FIRST. THESE WILL USE (4) THREADED RODS AND BE SELF SUPPORTING. TAKE CARE TO LEVEL THE FIXTURE AT THIS POINT, ESPECIALLY FOR CONTINUOUS RUNS.

  FOR CONTINUOUS RUNS, HANG EACH SUCCESSIVE SECTION USING (1) ADDITIONAL INSTALLED THREADED ROD AT PRE—DETERMINED LOCATION AND THE JOINING AND ALIGNING HARDWARE PROVIDED WITH THE FIXTURES, AND LEVEL EACH SECTION WITH THE PREVIOUS ONE.

  \*\*\*\*DO NOT ATTEMPT TO BOLT FIXTURES TOGETHER AND RAISE THE ASSEMBLED RUN AT ONE TIME. THIS WILL DAMAGE THE BRACKETRY AND PREVENT THE FIXTURES FROM JOINING TIGHTLY, AND WILL VOID THE FIXTURE WARRANTY!\*\*\*

  FOLLOW THE SAME PROCEDURE ABOVE TO INSTALL THE END UNIT.

CORRESPONDING FIXTURE AND PUT


ASIDE TO BE REINSTALLED IN STEP

\*NOTE- FIXTURE AND LENS SHIPPED


IN SAME BOX BUT UNINSTALLED.


- RECHECK ALL FIXTURES FOR LEVEL AND INSURE ALL JOINTS ARE TIGHT.

  IF SMALL GAPS OCCUR BETWEEN FIXTURE SECTIONS, APPLY A SMALL AMOUNT OF CAULK BETWEEN SECTIONS AND WIPE OFF EXCESS WITH A

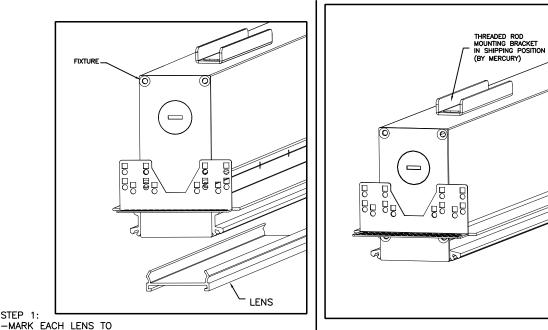

-PREPARE FIXTURE FOR INSTALLATION BY ROTATING THE THREADED ROD MOUNTING BRACKET 90 DEGREES






Project:

Distributor:

Dwg. no.:



IGHTING

MLR3-XX-72-750-830K-HTA-XXX-U-S

CATALOG NO:

20 Audrey Place Fairfield, NJ 07004 U.S.A.

-SECURE 1/4-20 THREADED RODS TO MOUNTING BRACKET WITH HEX NUTS. -SECURE FIXTURE TO STRUCTURE ABOVE. -CONTINUE TO STEP 4 & 5 FOR CONNECTING MORE THAN MIDDLE AND END. -GO TO STEP 6 FOR 'INDIVIDUAL' MODULE


MLR3-N5

Scale:


TRIMLESS/DRYWALL

INSTALLATION' INSTRUCTION

Date:

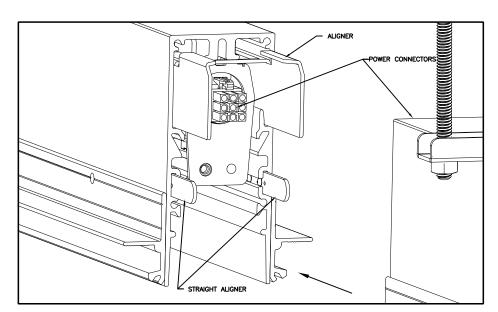


STEP 4 -ALIGN FIXTURE USING ALIGNERS BY MERCURY -CONNECT POWER CONNECTORS BETWEEN FIXTURES

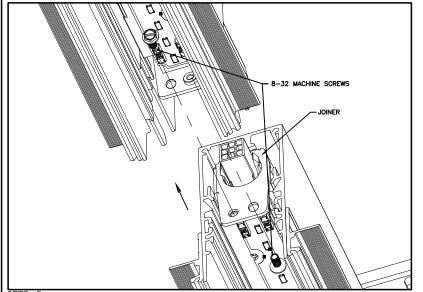


-PUSH EXCESS POWER CONNECTOR CABLE BACK INTO FIXTURE THROUGH JOINERS AS SHOWN FOR MLS-2 OR TO EITHER SIDE OF JOINER FOR MLS-3 -SECURE FIXTURES TOGETHER USING 8-32 SCREWS ON JOINER (PROVIDED BY MERCURY). -REPEAT STEP 2 & 4 AS NEEDED UNTIL THE

'END' MODULE IS INSTALLED

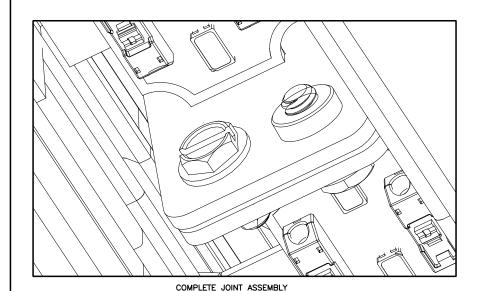

This document contains confidential and proprietary information and cannot not be reproduced or divulged, in whole or part, without authorization in writing by Mercury Architechural Lighting.

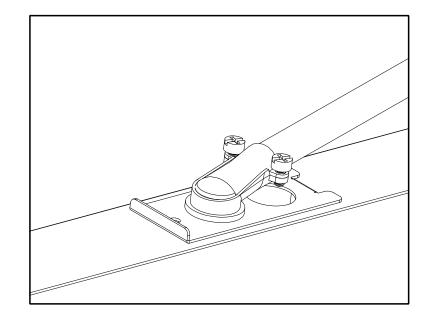


STEP 6
-MAKE ELECTRICAL CONNECTION TO BUILDING


STEP 9A-FLIP BRACKET UPWARD 90 DEGREES UINTIL FLAT SIDE OF BRACKET IS PERPENDICULAR TO CEILING.


STEP 9B-USING A FLAT HEAD SCREWDRIVER,ROTATE BRACKET COUNTERCLOCKWISE 90 DEGREES

STEP 9C-DISENGAGE BRACKET FROM GROOVE IN HOUSING.DISCARD BRACKETS AS SHOWN

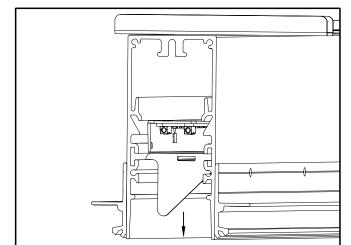

STEP 7 -MAKE SURE BRACKET IS DOWNWARD 90 DEGREES
UINTL FLAT SIDE OF BRACKET IS PERPENDICULAR TO CEILING. (SHIPPED INSIDE THE FIXTURE)






**CATALOG NO:** 


GHTING

MLR3-N5-XX-750-830K-HTA-XXX-U-S

20 Audrey Place Fairfield, NJ 07004 U.S.A.

STEP 8
-INSTALL DRYWALL AROUND FIXTURE WITH DRYWALL SCREWS
-MUD AND BLEND EDGES

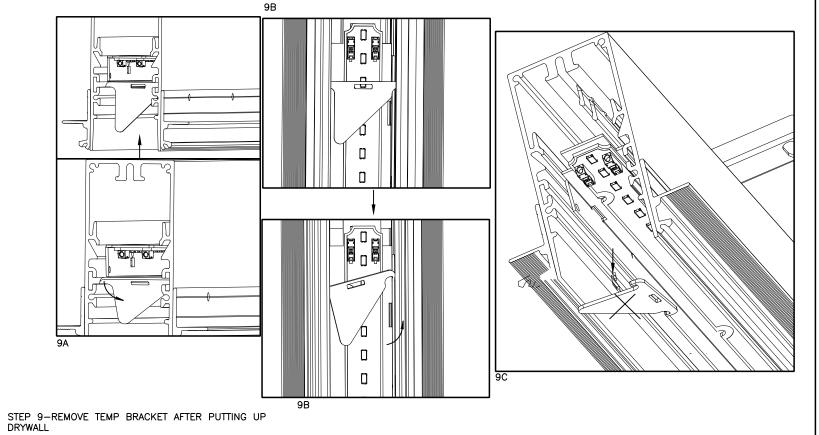



Project:

Distributor:

Dwg. no.:

MLR3-N5 TRIMLESS/DRYWALL INSTALLATION INSTRUCTION


Scale:

Rev.

Size:

Date:

STEP 10 -REINSTALL LENSES IN SAME FIXTURES AS THEY WERE REMOVED FROM STEP 1.

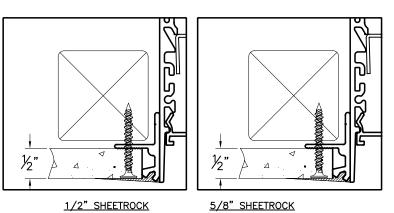

CEILLING OPTIONS

This document contains confidential and proprietary information and cannot not be reproduced or divulged, in whole or part, without authorization in writing by Mercury Architechural Lighting.