


DOWNLIGHT

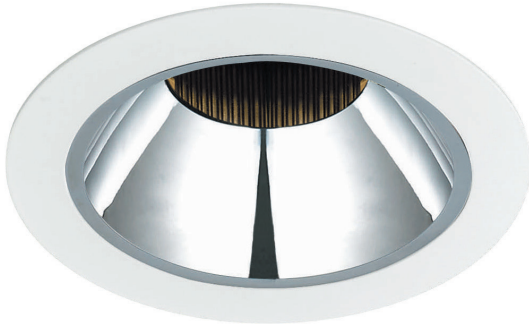

MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating
 ADJUSTABLE RING: PC
 REFLECTOR: ABS (Chrome) _Non Glare Refelctor

STANDARD COLORS

White, Gray, White Chrome, Dark Chrome

SOURCE INFORMATION

WATTAGE	10W / 13W / 14W / 18W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F

TYPE OF LED

COB

WARRANTY


50 000 hours at 77 °F

Fixture type:


Job information:

PHOTOMETRICS


QSR-10-AD-TWF

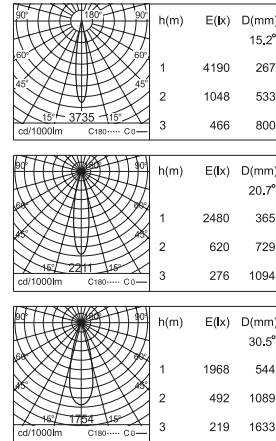



QSR-14-AD-TWF

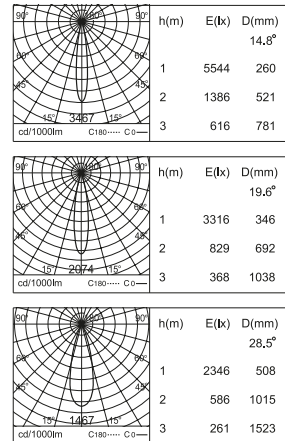


QSR-13-AD-FLT

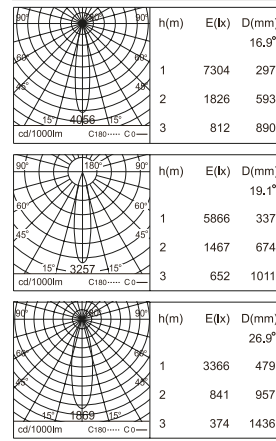



QSR-14H-AD-TWF

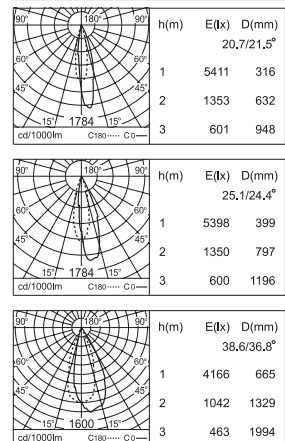


QSR-14-AD-STWF

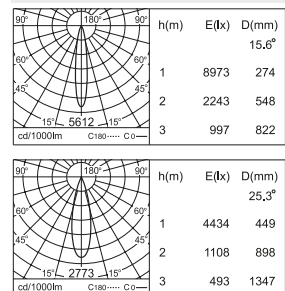

QSR-10-AWW-TWF



QSR-18-WW-TWF



PRODUCT DEFINITION SHEET



1	2	3	4	5	6
7	8	9	10	11	12

1	2	3	4	5	6
SERIES	WATTAGE	LIGHT DISTRIBUTION	HOUSING TYPE	BEAM ANGLE	LUMEN OUTPUT
<input type="checkbox"/> QSR	<input type="checkbox"/> 10W	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 15° <input type="checkbox"/> 20° <input type="checkbox"/> 30°	<input type="checkbox"/> 360 lm <input type="checkbox"/> 320 lm <input type="checkbox"/> 520 lm
	<input type="checkbox"/> 14W	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 14° <input type="checkbox"/> 19° <input type="checkbox"/> 28°	<input type="checkbox"/> 440 lm <input type="checkbox"/> 390 lm <input type="checkbox"/> 570 lm
	<input type="checkbox"/> 13W	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> FLT Flangeless Trim	<input type="checkbox"/> 16° <input type="checkbox"/> 19° <input type="checkbox"/> 26° <input type="checkbox"/> 45° <input type="checkbox"/> 50°	<input type="checkbox"/> 950 lm <input type="checkbox"/> 900 lm <input type="checkbox"/> 850 lm <input type="checkbox"/> 1000 lm <input type="checkbox"/> 1000 lm
	<input type="checkbox"/> 14HW	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 20° <input type="checkbox"/> 25° <input type="checkbox"/> 38°	<input type="checkbox"/> 880 lm <input type="checkbox"/> 880 lm <input type="checkbox"/> 880 lm
	<input type="checkbox"/> 10W	<input type="checkbox"/> AWW Adjustable Wall Wash	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 34°/41°	<input type="checkbox"/> 740 lm
	<input type="checkbox"/> 18W	<input type="checkbox"/> WW Wall Wash	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 52°/64°	<input type="checkbox"/> 870 lm
	<input type="checkbox"/> 14W	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> STWF Square Trim With Flange	<input type="checkbox"/> 15° <input type="checkbox"/> 25° <input type="checkbox"/> 37°	<input type="checkbox"/> 990 lm <input type="checkbox"/> 880 lm <input type="checkbox"/> 980 lm

7	8	9	10
FLANGE COLOR	COLOR TEMP	MOUNTING	DRIVER
<input type="checkbox"/> W White	<input type="checkbox"/> 90 CRI	<input type="checkbox"/> RM Recessed mount	<input type="checkbox"/> V010 0-10V Universal Voltage Driver
<input type="checkbox"/> B Black	<input type="checkbox"/> 27K		For other dimming options contact Mercury
<input type="checkbox"/> WC White Chrome	<input type="checkbox"/> 30K		
<input type="checkbox"/> DC Dark Chrome	<input type="checkbox"/> 35K		
	<input type="checkbox"/> 40K		

11	12
DRIVER LOCATION	VOLTAGE
<input type="checkbox"/> IC BOX	<input type="checkbox"/> UNIV 120VAC-277 VAC
<input type="checkbox"/> RE Remote*	



*For Flangeless Trim, Square Trim With and Wall Wash only

DIMENSIONS




QSR-10

TRIM WITH FLANGE




QSR-14

TRIM WITH FLANGE




QSR-13

FLANGELESS TRIM




QSR-14H

TRIM WITH FLANGE




QSR-10

TRIM WITH FLANGE




QSR-18

TRIM WITH FLANGE



QSR-14




SQUARE TRIM WITH FLANGE



DRIVER BOX (FOR FLANGELESS TRIM, SQUARE TRIM WITH AND WALL WASH ONLY)



- Inside the ceiling where the lighting fixture is to be installed.
- Connect the driver and luminaires via the quick connect.

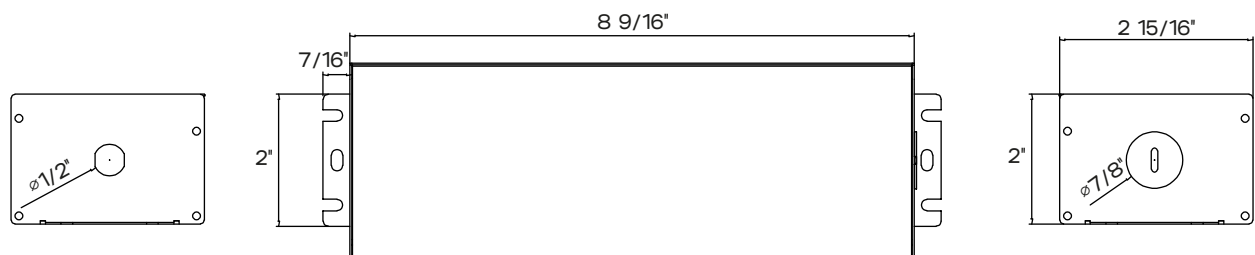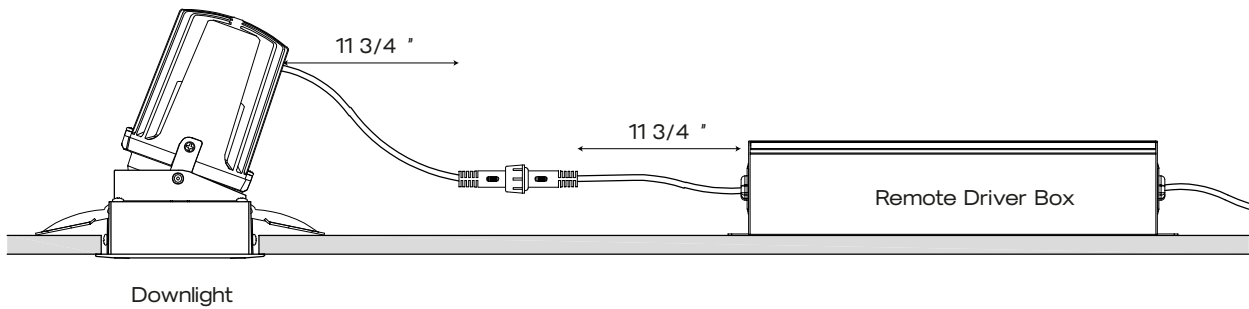

IC BOX

