

CONTOUR-MLS

SUSPENDED AND SURFACE MOUNT



The Mercury Lighting CONTOUR series showcases specifiable, modern arcs in recessed and pendant versions. The fluid shapes offer soft, even lighting, ideal for architectural settings.

MATERIAL

Extruded aluminum / powder coat finish

STANDARD COLORS

White / Black / Gray

SOURCE INFORMATION


Lumens	Up to 950 lm/feet
CRI	90
Voltage	120-277V
Rating	IP20

MLS2-CTR


LENGTH	LUMENS/FT	FIXTURE LUMENS	WATTS	LM/W-LV6
4FT	400	1600	18	89
	500	2000	23	87
	625	2500	29	86
	950	3800	47	81

MLS3-CTR


LENGTH	LUMENS/FT	FIXTURE LUMENS	WATTS	LM/W-LV6
4FT	400	1600	15	107
	500	2000	18	111
	625	2500	23	109
	1200	4800	48	100



Direct
opal diffuser




Indirect
opal diffuser




Direct/Indirect
opal diffuser

DIMENSIONS

MLS2-CTR

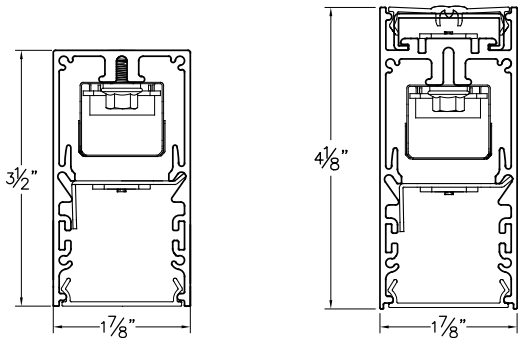

MLS3-CTR

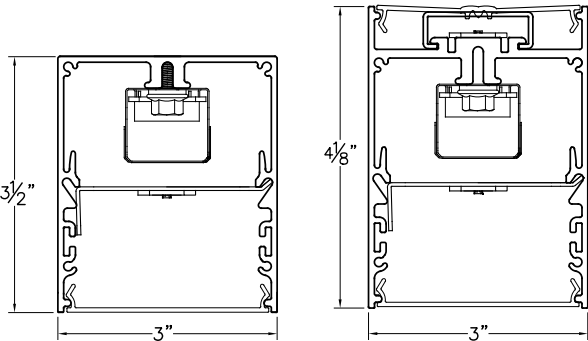

Fixture type:

Job information:

PRODUCT DEFINITION SHEET

1	-	2	-	3	-	4	-	5	-	6	-	7	-	8
9	-	10	-	11	-	12	-	13	-	14	-	15		

1	2	3	4	5	6
SERIES	MOUNTING	RADII	LUMENS/FT DIRECT	LUMENS/FT INDIRECT	CCT
☐ MLS2-CTR	☐ DI Direct/Indirect Suspended	☐ R11	☐ 400	☐ 400	90 CRI
☐ MLS3-CTR	☐ DM Direct Suspended Cable Mount	Specify pattern on page 4	☐ 500	☐ 500	☐ 30K 3000K
	☐ DM1 Direct Surface mount		☐ 625	☐ 625	☐ 35K 3500K
			☐ 950*	☐ 950*	☐ 40K 4000K
			☐ 1200**	☐ 1200**	
			*For MLS2-CTR only **For MLS3-CTR only	*For MLS2-CTR only **For MLS3-CTR only	
			Custom Lumen Packages. Lumen Packages with ASO diffuser.	Custom Lumen Packages. Lumen Packages with ASO diffuser.	
			Contact Mercury Lighting.	Contact Mercury Lighting.	

7	8	9	10	11
DIFFUSER DIRECT	DIFFUSER INDIRECT	DRIVER	FINISH	HANGING ACCESSORIES
☐ ASO Opal	☐ ASO Opal	☐ 1% 0-10V 1% Dimming	☐ W White	☐ R5PF-100 Round 5" power feed canopy
		☐ SR Sensor Ready (Required for Certain Controls, Contact Factory)	☐ B Black	☐ S5PF100 Square 5" power feed canopy
		☐ eL eLdoLED Solo 0.1%	☐ G Gray	☐ R5-100 Round 5" canopy
		☐ LDE1 Lutron Hi- Lume	☐ C Custom	☐ R2-100 Round 2" canopy
		☐ - As Specified	Custom powder coat color matching is available for a setup fee.	☐ S5-100 Square 5" canopy
			Consult Mercury Lighting for additional information.	☐ S2-100 Square 2" canopy
				☐ RP5-24 Round 5"canopy
				☐ SP5-24 Square 5"canopy


OPTIONS			
12	13	14	15
CIRCUITING	VOLTAGE	STANDBY MODULES	SENSORS
☐ 1C Single Circuit	☐ UNIV 120VAC-277 VAC	☐ EM10	☐ S1 Philips EasySense (SNS 210- Blue Tooth)
☐ 2C Two Circuit		☐ EM12	☐ S11 Enlighted Micro (SU5ECL)
Contact Mercury for adding additional zones, separated zones/circuits, etc		☐ NO OPTION	☐ S12 Lutron Athena Node (Color-White)
			☐ S13 Lutron Athena Node (Color-Black)
			☐ S14 Lutron Athena Sensor (Color-White)
			☐ S15 Lutron Athena Sensor (Color-Black)
			☐ 017 Leviton PIR ZLS05-ILW

CONTOUR-MLS


SUSPENDED AND SURFACE MOUNT

MOUNTING


MLS2-CTR

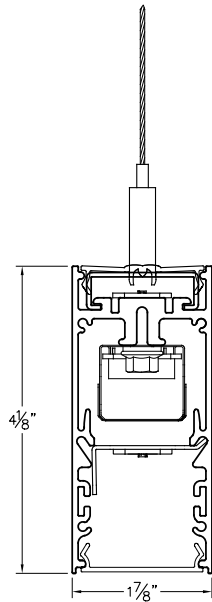

DI
DIRECT/INDIRECT SUSPENDED

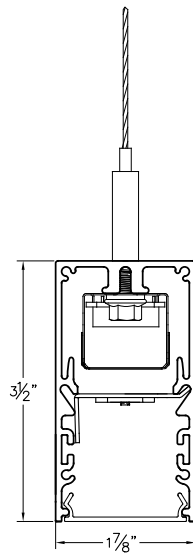


DM
DIRECT SUSPENDED
CABLE MOUNT

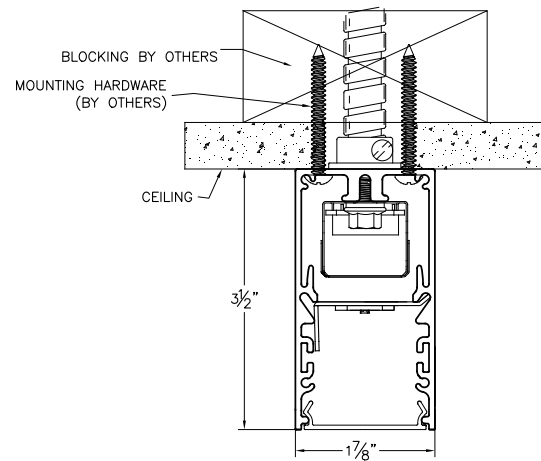


DMI
DIRECT SURFACE MOUNT


MLS3-CTR

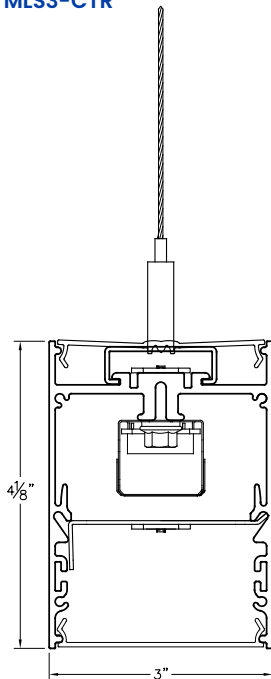

DI
DIRECT/INDIRECT SUSPENDED

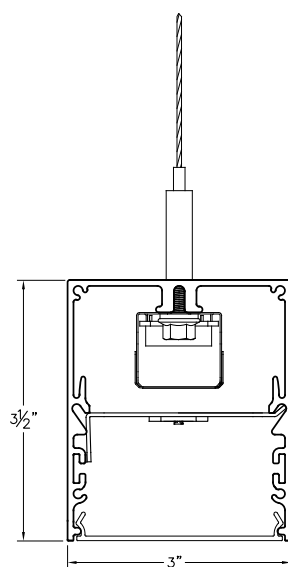

DM
DIRECT SUSPENDED
CABLE MOUNT

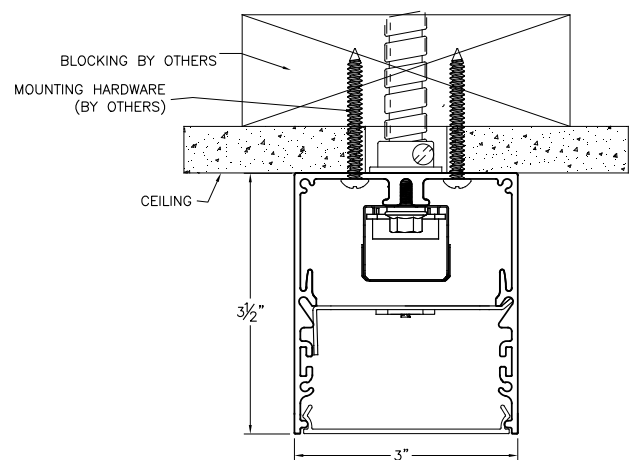


DMI
DIRECT SURFACE MOUNT

Use grid below to sketch desired pattern


[illegible]

HANGING ACCESSORIES

CABLE SETS

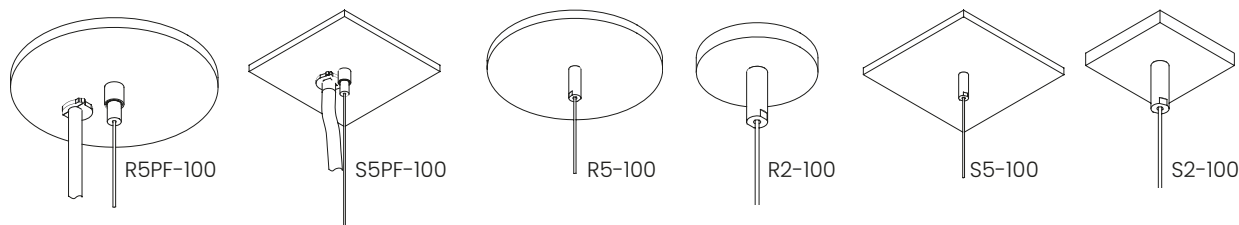

STEM SETS

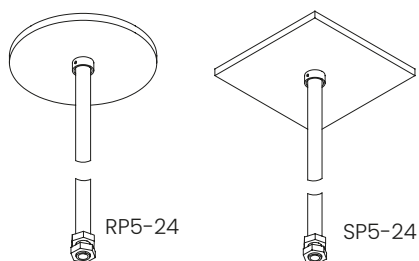

PART #	DESCRIPTION
R5PF-100	Round 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
S5PF100	Square 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
R5-100	Round 5" canopy, Hanging hardware, 100" long 1/16" cable.
R2-100	Round 2" canopy, Hanging hardware, 100" long 1/16" cable.
S5-100	Square 5" canopy, Hanging hardware, 100" long 1/16" cable.
S2-100	Square 2" canopy, Hanging hardware, 100" long 1/16" cable.
RP5-24	Round 5"canopy, Hanging hardware, 24" long 1/2" dia. stem.
SP5-24	Square 5"canopy, Hanging hardware, 24" long 1/2" dia. stem.

Other cable and stem lengths available. Consult factory.