

PHOTOMETRIC RESULTS

Name:	CYL6-SM_3000K_2500lm		
Type:	LED PENDANT LIGHT	Diameter:	175 mm
Luminaire:	AL.Die-casting, AL.WIDE REF. (AL.ETCHING EMBOSS REF)	Length:	0 mm
Test no.:	LT-2024-08-30-T03	Width	0 mm
Lamp type:	LED11W, 250mA, 3000K, CRI90	Height:	227 mm
No. of lamps:	1	Power:	28.44 W
Lamp flux:	2996.00 lm	Operator:	ASY
Date:	2024-08-30 PM 2:11:57	LOR:	98.7 %
Comment:	LVED PRO 40W/ 220-240/ 950CS, 25-42VDC, MAX40W, 700mA		

Intensity [cd/klm] CYL6-SM_3000K_2500lm / C-Plane measurement

[illegible]


Intensity [cd/klm] CYL6-SM_3000K_2500lm / C-Plane measurement

[illegible]

PHOTOMETRIC RESULTS

Name:	CYL6-SM_3000K_2500lm		
Type:	LED PENDANT LIGHT	Diameter:	175 mm
Luminaire:	AL.Die-casting, AL.WIDE REF. (AL.ETCHING EMBOSS REF)	Length:	0 mm
Test no.:	LT-2024-08-30-T03	Width	0 mm
Lamp type:	LED28W, 700mA, 3000K, CRI90	Height:	227 mm
No. of lamps:	1	Power:	28.44 W
Lamp flux:	2996.00 lm	Operator:	ASY
Date:	2024-08-30 PM 2:11:57	LOR:	98.7 %
Comment:	LVED PRO 40W/ 220-240/ 950CS, 25-42VDC, MAX40W, 700mA		


Polar diagram CYL6-SM_3000K_2500lm / C-Plane measurement

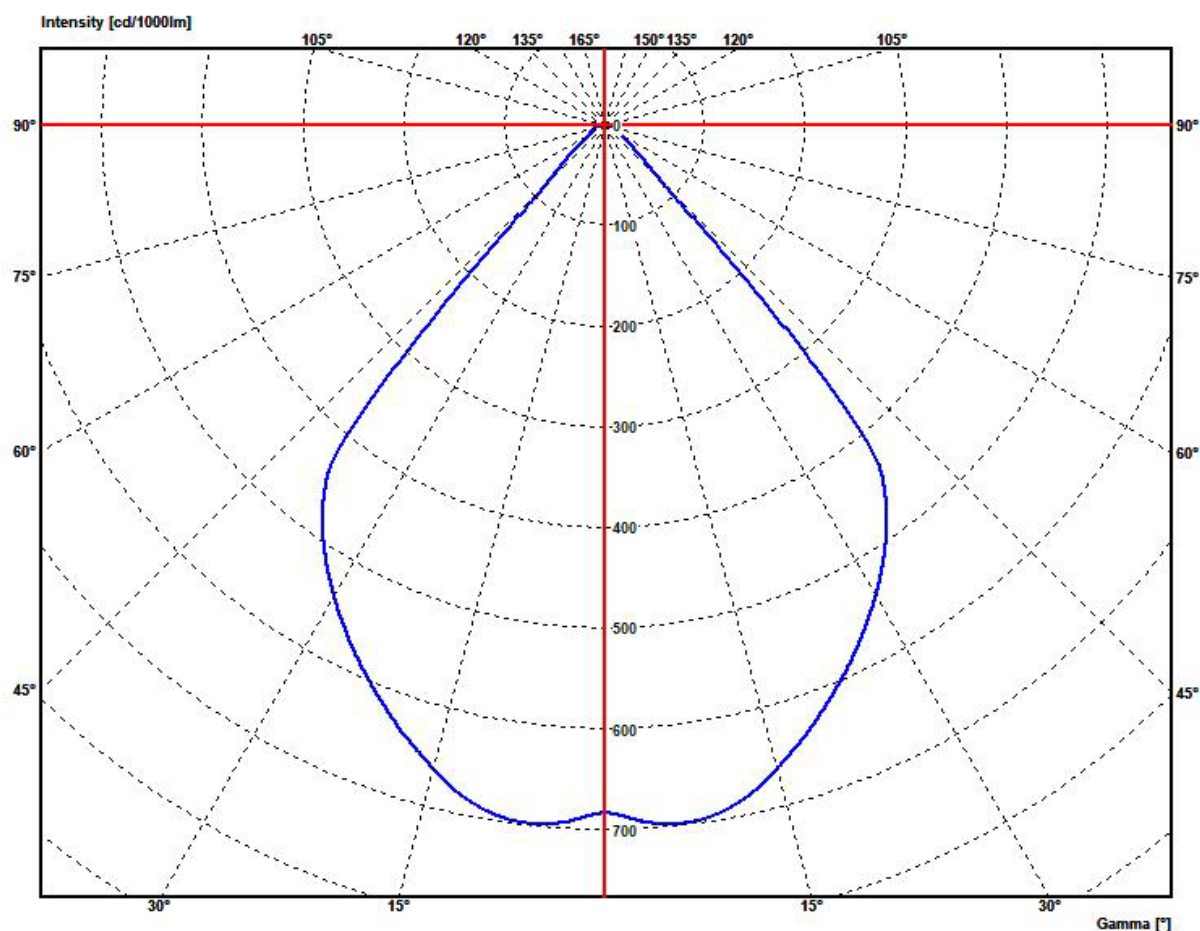

PHOTOMETRIC RESULTS

Name:	CYL6-SM_3000K_2500lm		
Type:	LED PENDANT LIGHT	Diameter:	175 mm
Luminaire:	AL.Die-casting, AL.WIDE REF. (AL.ETCHING EMBOSS REF)	Length:	0 mm
Test no.:	LT-2024-08-30-T03	Width:	0 mm
Lamp type:	LED28W, 700mA, 3000K, CRI90	Height:	227 mm
No. of lamps:	1	Power:	28.44 W
Lamp flux:	2996.00 lm	Operator:	ASY
Date:	2024-08-30 PM 2:11:57	LOR:	98.7 %
Comment:	LVED PRO 40W/ 220-240/ 950CS, 25-42VDC, MAX40W, 700mA		


Illuminance and Intensity diagram CYL6-SM_3000K_2500lm / C-Plane measurement

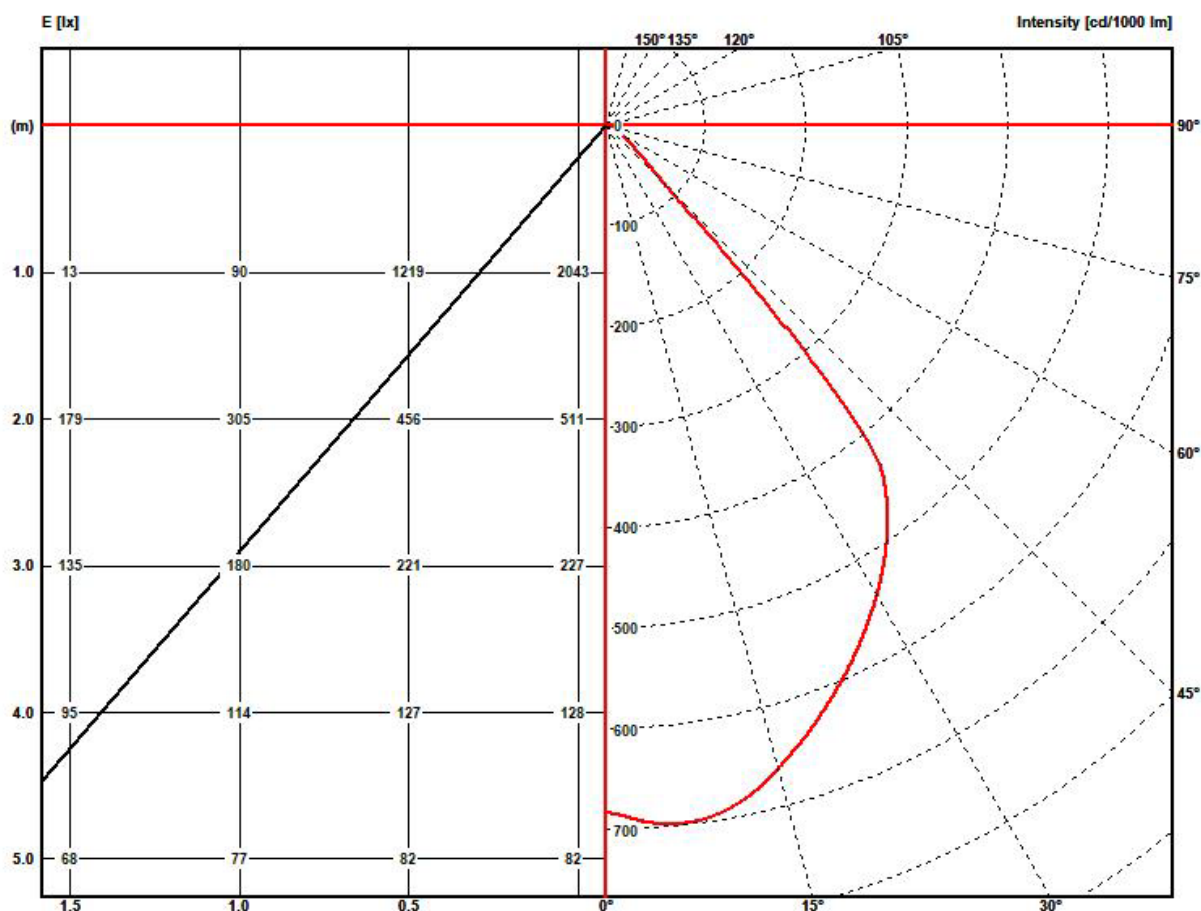

PHOTOMETRIC RESULTS

Name:	CYL6-SM_3000K_2500lm		
Type:	LED PENDANT LIGHT	Diameter:	175 mm
Luminaire:	AL.Die-casting, AL.WIDE REF. (AL.ETCHING EMBOSS REF)	Length:	0 mm
Test no.:	LT-2024-08-30-T03	Width:	0 mm
Lamp type:	LED11W, 250mA, 3000K, CRI90	Height:	227 mm
No. of lamps:	1	Power:	28.44 W
Lamp flux:	2996.00 lm	Operator:	ASY
Date:	2024-08-30 PM 2:11:57	LOR:	98.7 %
Comment:	LVED PRO 40W/ 220-240/ 950CS, 25-42VDC, MAX40W, 700mA		

Isoline diagram CYL6-SM_3000K_2500lm / C-Plane measurement

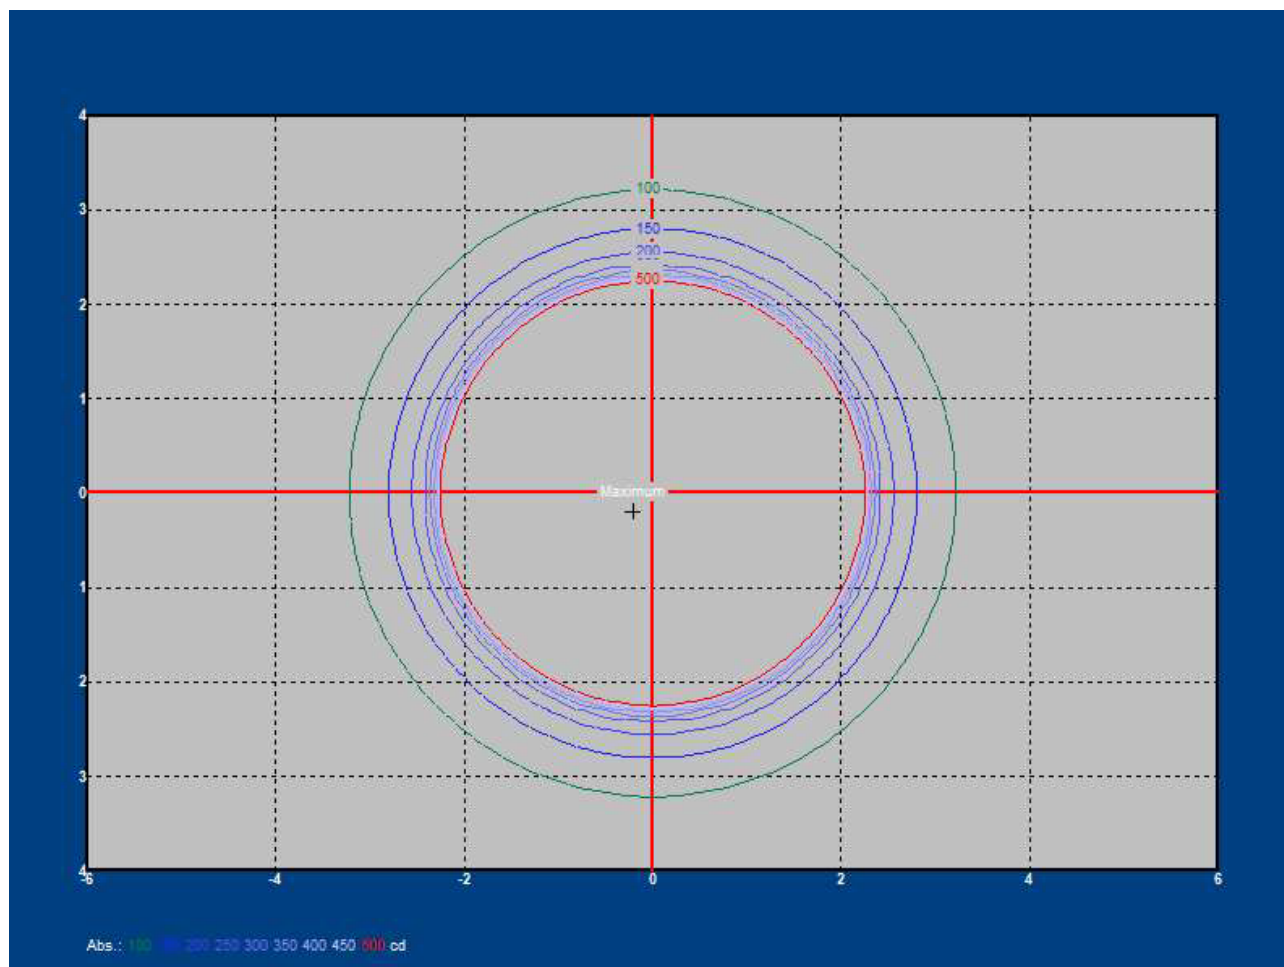

Luminaire mounting height above ground: 2.4 m

Luminaire rotation angle: 0 °

PHOTOMETRIC RESULTS

Name:	CYL6-SM_3000K_2500lm		
Type:	LED PENDANT LIGHT	Diameter:	175 mm
Luminaire:	AL.Die-casting, AL.WIDE REF. (AL.ETCHING EMBOSS REF)	Length:	0 mm
Test no.:	LT-2024-08-30-T03	Width	0 mm
Lamp type:	LED11W, 250mA, 3000K, CRI90	Height:	227 mm
No. of lamps:	1	Power:	28.44 W
Lamp flux:	2996.00 lm	Operator:	ASY
Date:	2024-08-30 PM 2:11:57	LOR:	98.7 %
Comment:	LVED PRO 40W/ 220-240/ 950CS, 25-42VDC, MAX40W, 700mA		

LiTG Utilization factors

Ceiling	70	80	80	50	50	80	80	80	50	50	30	0
Wall	50	50	30	50	30	80	50	30	50	30	30	0
Working plane	20	30	30	30	30	10	10	10	10	10	10	0
Roomindices	Utilization coefficients for ceiling mounted luminaires											
0.6	58	59	51	58	51	75	57	50	56	50	50	44
0.8	69	71	64	70	63	85	68	62	67	62	61	55
1	76	79	71	77	70	91	75	69	74	68	68	62
1.25	85	89	81	86	79	97	83	77	82	77	76	71
1.5	90	95	87	91	84	101	88	82	86	81	81	75
2	96	102	94	97	91	104	93	88	91	87	86	80
2.5	101	108	100	101	96	107	97	92	95	91	90	84
3	104	112	105	105	100	109	100	96	98	94	93	88
4	107	117	110	108	103	110	103	98	99	96	95	90
5	110	120	114	110	106	111	105	101	101	98	97	92

Ceiling	70	80	80	50	50	80	80	80	50	50	30	0
Wall	50	50	30	50	30	80	50	30	50	30	30	0
Working plane	20	30	30	30	30	10	10	10	10	10	10	0
Roomindices	Utilization coefficients for pendant mounted luminaires											
0.6	60	62	53	60	52	79	59	52	57	51	50	44
0.8	72	75	66	72	64	88	71	63	68	62	62	55
1	79	83	74	79	71	94	77	70	75	69	68	62
1.25	88	93	84	88	81	99	85	79	83	78	77	71
1.5	93	99	91	93	86	102	90	84	87	82	81	75
2	99	106	98	99	93	106	95	90	92	87	86	80
2.5	103	112	104	103	98	108	99	94	95	92	90	84
3	106	116	109	107	102	110	102	97	98	95	93	88
4	109	120	113	109	105	111	104	100	100	97	95	90
5	111	123	117	112	107	112	106	102	102	99	97	92

PHOTOMETRIC RESULTS

Name:	CYL6-SM_3000K_2500lm		
Type:	LED PENDANT LIGHT	Diameter:	175 mm
Luminaire:	AL.Die-casting, AL.WIDE REF. (AL.ETCHING EMBOSS REF)	Length:	0 mm
Test no.:	LT-2024-08-30-T03	Width	0 mm
Lamp type:	LED28W, 700mA, 3000K, CRI90	Height:	227 mm
No. of lamps:	1	Power:	28.44 W
Lamp flux:	2996.00 lm	Operator:	ASY
Date:	2024-08-30 PM 2:11:57	LOR:	98.7 %
Comment:	LVED PRO 40W/ 220-240/ 950CS, 25-42VDC, MAX40W, 700mA		

UGR Unified Glare Ratios

Ceiling reflectance		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall reflectance		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Floor cavity reflectance		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimension		Viewed crosswise					Viewed endwise				
2H	2H	13.4	14.6	13.7	14.9	15.2	13.4	14.6	13.7	14.9	15.2
2H	3H	13.3	14.3	13.6	14.7	15.0	13.3	14.3	13.6	14.7	15.0
2H	4H	13.2	14.2	13.6	14.6	14.9	13.2	14.2	13.6	14.6	14.9
2H	6H	13.2	14.1	13.6	14.5	14.9	13.2	14.1	13.6	14.5	14.9
2H	8H	13.2	14.0	13.6	14.4	14.8	13.2	14.0	13.6	14.4	14.8
2H	12H	13.1	14.0	13.6	14.4	14.8	13.1	14.0	13.6	14.4	14.8
4H	2H	13.1	14.1	13.5	14.5	14.9	13.1	14.1	13.5	14.5	14.9
4H	3H	13.0	13.9	13.5	14.3	14.7	13.0	13.9	13.5	14.3	14.7
4H	4H	13.1	13.8	13.5	14.2	14.6	13.1	13.8	13.5	14.2	14.6
4H	6H	13.0	13.7	13.5	14.1	14.6	13.0	13.7	13.5	14.1	14.6
4H	8H	13.0	13.6	13.5	14.1	14.5	13.0	13.6	13.5	14.1	14.5
4H	12H	13.0	13.6	13.5	14.0	14.5	13.0	13.6	13.5	14.0	14.5
8H	4H	12.9	13.5	13.4	14.0	14.4	12.9	13.5	13.4	14.0	14.4
8H	6H	12.9	13.4	13.4	13.9	14.4	12.9	13.4	13.4	13.9	14.4
8H	8H	13.0	13.4	13.5	13.9	14.4	13.0	13.4	13.5	13.9	14.4
8H	12H	13.0	13.3	13.5	13.8	14.4	13.0	13.3	13.5	13.8	14.4
12H	4H	12.9	13.4	13.4	13.9	14.4	12.9	13.4	13.4	13.9	14.4
12H	6H	12.9	13.3	13.4	13.9	14.3	12.9	13.3	13.4	13.9	14.3
12H	8H	12.9	13.3	13.5	13.8	14.3	12.9	13.3	13.5	13.8	14.3

PHOTOMETRIC RESULTS

Name:	CYL6-SM_3000K_2500lm		
Type:	LED PENDANT LIGHT	Diameter:	175 mm
Luminaire:	AL.Die-casting, AL.WIDE REF. (AL.ETCHING EMBOSS REF)	Length:	0 mm
Test no.:	LT-2024-08-30-T03	Width:	0 mm
Lamp type:	LED28W, 700mA, 3000K, CRI90	Height:	227 mm
No. of lamps:	1	Power:	28.44 W
Lamp flux:	2996.00 lm	Operator:	ASY
Date:	2024-08-30 PM 2:11:57	LOR:	98.7 %
Comment:	LVED PRO 40W/ 220-240/ 950CS, 25-42VDC, MAX40W, 700mA		

Zonal flux CYL6-SM_3000K_2500lm / C-Plane measurement

Gamma [°]	Imin [cd/klm]	Imax [cd/klm]	Imean [cd/klm]	Zonal flux [lm]	Sum. zonal flux [lm]	Rel. zonal flux [%]	Sum. rel. zonal flux [%]
0.0	681.9	681.9	681.9	0.49	0.49	0.02	0.02
1.0	683.9	683.9	683.9	3.92	4.41	0.13	0.15
2.0	687.7	687.7	687.7	7.89	12.30	0.26	0.41
3.0	691.4	691.4	691.4	11.89	24.18	0.40	0.81
4.0	694.0	694.0	694.0	15.91	40.09	0.53	1.34
5.0	695.8	695.8	695.8	19.92	60.01	0.66	2.00
6.0	696.5	696.5	696.5	23.92	83.93	0.80	2.80
7.0	696.3	696.3	696.3	27.88	111.81	0.93	3.73
8.0	694.8	694.8	694.8	31.77	143.58	1.06	4.79
9.0	692.4	692.4	692.4	35.59	179.17	1.19	5.98
10.0	689.1	689.1	689.1	39.32	218.48	1.31	7.29
11.0	685.0	685.0	685.0	42.94	261.43	1.43	8.73
12.0	680.1	680.1	680.1	46.46	307.88	1.55	10.28
13.0	674.4	674.4	674.4	49.84	357.72	1.66	11.94
14.0	667.6	667.6	667.6	53.06	410.78	1.77	13.71
15.0	660.3	660.3	660.3	56.14	466.93	1.87	15.59
16.0	652.6	652.6	652.6	59.10	526.03	1.97	17.56
17.0	645.4	645.4	645.4	62.00	588.03	2.07	19.63
18.0	638.3	638.3	638.3	64.80	652.83	2.16	21.79
19.0	630.6	630.6	630.6	67.45	720.28	2.25	24.04
20.0	622.7	622.7	622.7	69.97	790.25	2.34	26.38
21.0	614.7	614.7	614.7	72.37	862.62	2.42	28.79
22.0	606.8	606.8	606.8	74.68	937.30	2.49	31.28
23.0	598.7	598.7	598.7	76.86	1014.15	2.57	33.85
24.0	590.6	590.6	590.6	78.92	1093.07	2.63	36.48
25.0	582.1	582.1	582.1	80.82	1173.89	2.70	39.18
26.0	573.7	573.7	573.7	82.63	1256.52	2.76	41.94
27.0	564.9	564.9	564.9	84.26	1340.79	2.81	44.75
28.0	556.0	556.0	556.0	85.77	1426.55	2.86	47.62

Zonal flux CYL6-SM_3000K_2500lm / C-Plane measurement

Gamma [°]	Imin [cd/klm]	Imax [cd/klm]	Imean [cd/klm]	Zonal flux [lm]	Sum. zonal flux [lm]	Rel. zonal flux [%]	Sum. rel. zonal flux [%]
29.0	547.4	547.4	547.4	87.19	1513.74	2.91	50.53
30.0	538.4	538.4	538.4	88.45	1602.18	2.95	53.48
31.0	528.9	528.9	528.9	89.50	1691.69	2.99	56.46
32.0	519.3	519.3	519.3	90.41	1782.10	3.02	59.48
33.0	509.4	509.4	509.4	91.14	1873.24	3.04	62.52
34.0	499.1	499.1	499.1	91.70	1964.94	3.06	65.59
35.0	488.1	488.1	488.1	91.98	2056.92	3.07	68.66
36.0	476.4	476.4	476.4	92.01	2148.93	3.07	71.73
37.0	464.2	464.2	464.2	91.79	2240.71	3.06	74.79
38.0	449.4	449.4	449.4	90.90	2331.61	3.03	77.82
39.0	431.7	431.7	431.7	89.25	2420.86	2.98	80.80
40.0	391.0	391.0	391.0	82.57	2503.43	2.76	83.56
41.0	326.1	326.1	326.1	70.30	2573.72	2.35	85.91
42.0	248.2	248.2	248.2	54.57	2628.29	1.82	87.73
43.0	172.7	172.7	172.7	38.71	2667.00	1.29	89.02
44.0	112.1	112.1	112.1	25.58	2692.58	0.85	89.87
45.0	84.9	84.9	84.9	19.73	2712.31	0.66	90.53
46.0	73.3	73.3	73.3	17.33	2729.64	0.58	91.11
47.0	64.6	64.6	64.6	15.53	2745.17	0.52	91.63
48.0	58.0	58.0	58.0	14.17	2759.35	0.47	92.10
49.0	52.1	52.1	52.1	12.91	2772.26	0.43	92.53
50.0	46.7	46.7	46.7	11.75	2784.01	0.39	92.92
51.0	41.9	41.9	41.9	10.71	2794.72	0.36	93.28
52.0	37.8	37.8	37.8	9.78	2804.50	0.33	93.61
53.0	34.2	34.2	34.2	8.96	2813.46	0.30	93.91
54.0	31.0	31.0	31.0	8.24	2821.70	0.28	94.18
55.0	28.2	28.2	28.2	7.60	2829.30	0.25	94.44
56.0	25.8	25.8	25.8	7.02	2836.32	0.23	94.67
57.0	23.7	23.7	23.7	6.53	2842.85	0.22	94.89
58.0	21.9	21.9	21.9	6.11	2848.96	0.20	95.09
59.0	20.3	20.3	20.3	5.72	2854.69	0.19	95.28
60.0	19.0	19.0	19.0	5.40	2860.09	0.18	95.46
61.0	17.9	17.9	17.9	5.14	2865.23	0.17	95.64
62.0	16.8	16.8	16.8	4.88	2870.11	0.16	95.80
63.0	16.1	16.1	16.1	4.71	2874.82	0.16	95.96
64.0	15.3	15.3	15.3	4.53	2879.35	0.15	96.11
65.0	14.8	14.8	14.8	4.41	2883.76	0.15	96.25
66.0	14.3	14.3	14.3	4.29	2888.05	0.14	96.40
67.0	13.8	13.8	13.8	4.18	2892.22	0.14	96.54
68.0	13.5	13.5	13.5	4.10	2896.32	0.14	96.67
69.0	13.1	13.1	13.1	4.01	2900.33	0.13	96.81
70.0	12.7	12.7	12.7	3.93	2904.26	0.13	96.94
71.0	12.4	12.4	12.4	3.87	2908.13	0.13	97.07

Zonal flux CYL6-SM_3000K_2500lm / C-Plane measurement

Gamma [°]	Imin [cd/klm]	Imax [cd/klm]	Imean [cd/klm]	Zonal flux [lm]	Sum. zonal flux [lm]	Rel. zonal flux [%]	Sum. rel. zonal flux [%]
72.0	12.1	12.1	12.1	3.79	2911.92	0.13	97.19
73.0	11.9	11.9	11.9	3.72	2915.65	0.12	97.32
74.0	11.5	11.5	11.5	3.64	2919.28	0.12	97.44
75.0	11.2	11.2	11.2	3.56	2922.84	0.12	97.56
76.0	10.9	10.9	10.9	3.47	2926.31	0.12	97.67
77.0	10.6	10.6	10.6	3.39	2929.70	0.11	97.79
78.0	10.2	10.2	10.2	3.28	2932.98	0.11	97.90
79.0	9.8	9.8	9.8	3.16	2936.14	0.11	98.00
80.0	9.4	9.4	9.4	3.04	2939.19	0.10	98.10
81.0	9.0	9.0	9.0	2.91	2942.10	0.10	98.20
82.0	8.5	8.5	8.5	2.76	2944.86	0.09	98.29
83.0	7.9	7.9	7.9	2.58	2947.44	0.09	98.38
84.0	7.2	7.2	7.2	2.37	2949.81	0.08	98.46
85.0	6.0	6.0	6.0	1.96	2951.77	0.07	98.52
86.0	4.7	4.7	4.7	1.55	2953.32	0.05	98.58
87.0	3.6	3.6	3.6	1.17	2954.49	0.04	98.61
88.0	2.4	2.4	2.4	0.80	2955.28	0.03	98.64
89.0	1.3	1.3	1.3	0.42	2955.71	0.01	98.66
90.0	0.6	0.6	0.6	0.19	2955.89	0.01	98.66