

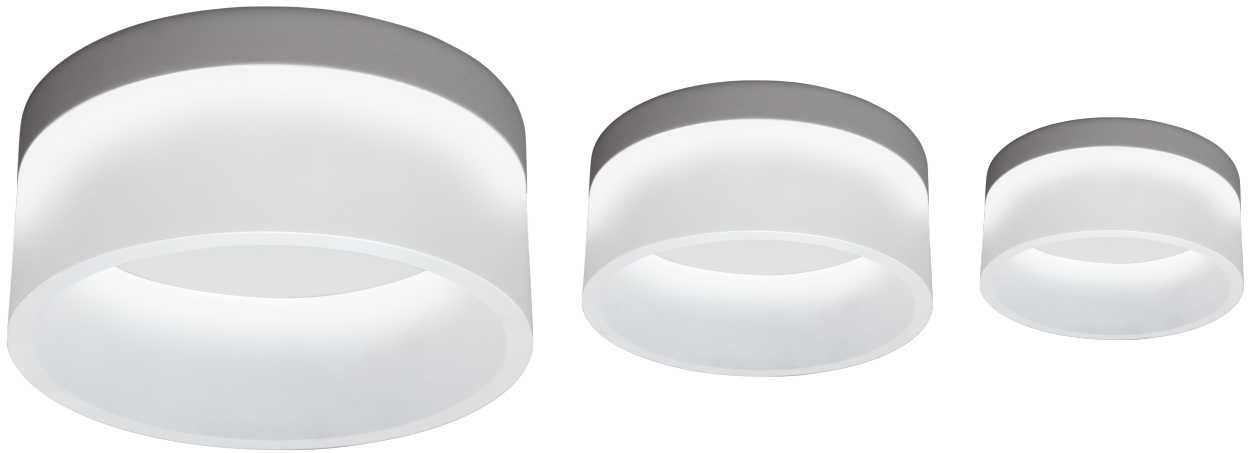
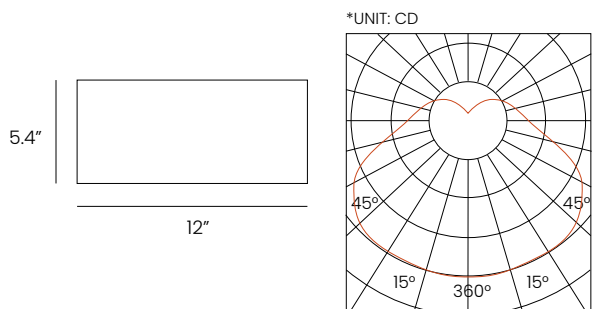


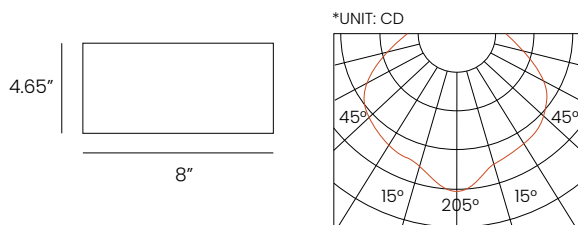

DIMENSIONS

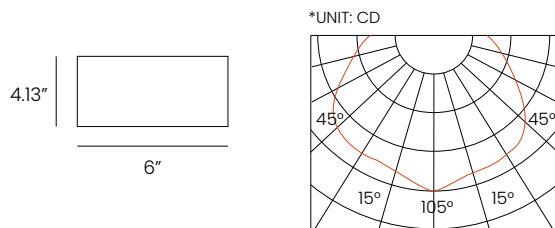

Fixture type:

Job information:

MATERIAL

Aluminum body

STANDARD COLOR

White

SOURCE INFORMATION

DELIVERED LUMENS	Up to 1768lm
WATTAGE	Up to 12W
INPUT VOLTAGE	120VAC-277VAC
IP	20
CRI	90+
CCT	2700K/3000K/3500K

PERFORMANCE

Dimension (in)	Delivered Lumens (L)	System Watts (W)	Beam Angle
6	370	10	158°
8	621	15	138°
12	1768	27	161°

WARRANTY

5 years

PRODUCT DEFINITION SHEET



1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - 9



1	2	3	4	5	6
SERIES	MOUNTING	DIMENSION	LUMEN OUTPUT	COLOR TEMP	COLOR
☐ SILO	☐ M Suspended Cable Mount	☐ 6"	☐ 370 lm	☐ 90 CRI	☐ ☐ W White
	☐ M1 Surface Mount	☐ 8"	☐ 621 lm	☐ 27K	
	☐ M2 Suspended Stem Mount (For 8" and 12" only)	☐ 12"	☐ 1768 lm	☐ 30K	
				☐ 35K	

7	8	9
HANGING ACCESSORIES	DRIVER	VOLTAGE
☐ R5PF-100 Round 5" power feed canopy	☐ V010 0-10V Universal Voltage Driver	☐ UNIV 120VAC-277 VAC
☐ S5PF100 Square 5" power feed canopy	For other dimming options contact Mercury	
☐ RP5-24 Round 5"canopy*		
☐ SP5-24 Square 5"canopy*		



*For 8" and 12" only

HANGING ACCESSORIES

CABLE SETS



STEM SETS



PART #	DESCRIPTION
R5PF-100	Round 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
S5PF100	Square 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
RP5-24	Round 5"canopy, Hanging hardware, 24" long 1/2" dia. stem.
SP5-24	Square 5"canopy, Hanging hardware, 24" long 1/2" dia. stem.

Other cable and stem lengths available. Consult factory.