

APOLLO PENDANT DIRECT LUMINAIRE



MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating
COVER: PC

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	13W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F


TYPE OF LED

SMD

WARRANTY

50 000 hours at 77 °F

DIMENSIONS

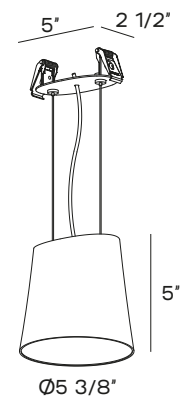


PHOTOMETRICS

90° 180° 90°		h(m)	E(lx)	D(mm)
60° 60°		1	541	2745
45° 45°		2	135	5489
15° 15°		3	60	8234
cd/1000lm C180 C0				

Fixture type:

Job information:

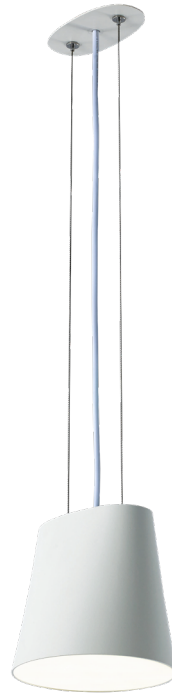

PRODUCT DEFINITION SHEET

1	2	3	4	5
6	7	8	9	10

1	2	3	4	5	6
SERIES	MOUNTING	WATTAGE	LUMEN OUTPUT	COLOR TEMP	FINISH
<input type="checkbox"/> APL5	<input type="checkbox"/> DS Suspended	<input type="checkbox"/> 13W	<input type="checkbox"/> 1000 lm	<input checked="" type="checkbox"/> 90 CRI <input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> W White <input type="checkbox"/> G Grey <input type="checkbox"/> B Black <input type="checkbox"/> C Custom <p>Custom powder coat color matching is available for a setup fee.</p> <p>Consult Mercury Lighting for additional information.</p>

7	8	9	10
BEAM ANGLE	DRIVER	VOLTAGE	HANGING ACCESSORIES
<input type="checkbox"/> 107°	<input type="checkbox"/> V010-1 0-10V, dim to 1% For other dimming options contact Mercury	<input type="checkbox"/> UNIV 120VAC-277 VAC	<input type="checkbox"/> SC Standard