

APOLLO PENDANT DIRECT LUMINAIRE



MATERIAL

Aluminum Spinning Processing, Electrostatic Powder Coating
 GEAR BOX: Aluminum Die-Casting, Electro Powder Coating
 REFLECTOR: Aluminum Anodized Specular Silver

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	19W / 27W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F


TYPE OF LED

COB


WARRANTY

50 000 hours at 77 °F

DIMENSIONS

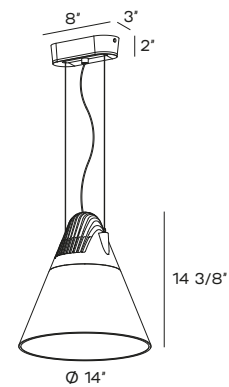

PHOTOMETRICS

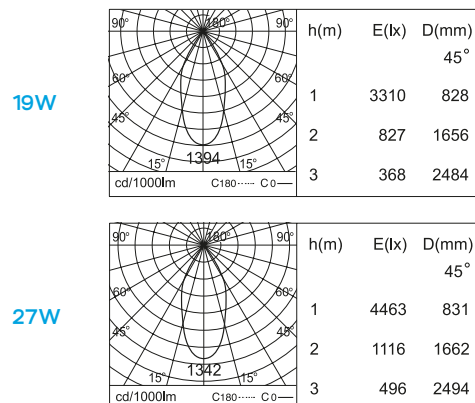

Fixture type:

Job information:



PRODUCT DEFINITION SHEET

1	2	3	4	5
6	7	8	9	10

1	2	3	4	5	6
SERIES	MOUNTING	WATTAGE	LUMEN OUTPUT	COLOR TEMP	FINISH
<input type="checkbox"/> APL14	<input type="checkbox"/> DS Suspended	<input type="checkbox"/> 19W <input type="checkbox"/> 27W	<input type="checkbox"/> 1800 lm <input type="checkbox"/> 2500 lm	90 CRI <input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> W White <input type="checkbox"/> G Grey <input type="checkbox"/> B Black <input type="checkbox"/> C Custom Custom powder coat color matching is available for a setup fee. Consult Mercury Lighting for additional information.

7	8	9	10
BEAM ANGLE	DRIVER	VOLTAGE	HANGING ACCESSORIES
<input type="checkbox"/> 45°	<input type="checkbox"/> V010-1 0-10V, dim to 1% For other dimming options contact Mercury	<input type="checkbox"/> UNIV 120VAC-277 VAC	<input type="checkbox"/> SC Standard