

## APOLLO PENDANT DIRECT LUMINAIRE



### MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating  
COVER: PC

### STANDARD COLORS

White, Gray, Black

### SOURCE INFORMATION

WATTAGE	28W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F


### TYPE OF LED

SMD


### WARRANTY

50 000 hours at 77 °F

### DIMENSIONS

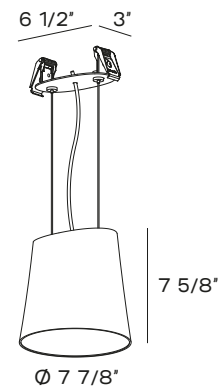


### PHOTOMETRICS

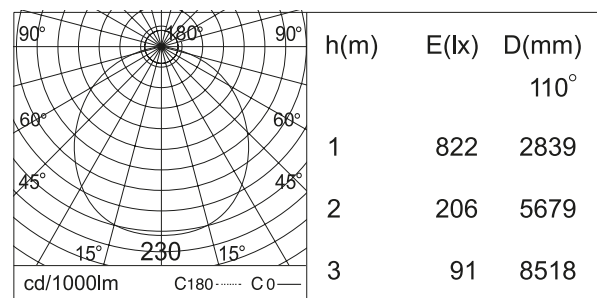

Fixture type:

Job information:

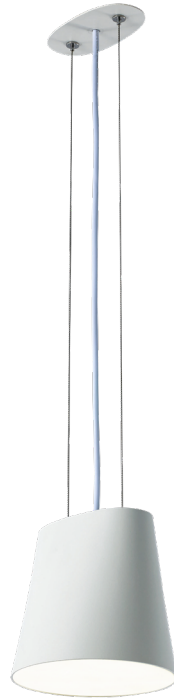

## PRODUCT DEFINITION SHEET

1	2	3	4	5
6	7	8	9	10

1	2	3	4	5	6
SERIES	MOUNTING	WATTAGE	LUMEN OUTPUT	COLOR TEMP	FINISH
<input type="checkbox"/> APL7	<input type="checkbox"/> DS Suspended	<input type="checkbox"/> 28W	<input type="checkbox"/> 2200 lm	<input checked="" type="checkbox"/> 90 CRI <input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> W White <input type="checkbox"/> G Grey <input type="checkbox"/> B Black <input type="checkbox"/> C Custom <p>Custom powder coat color matching is available for a setup fee.</p> <p>Consult Mercury Lighting for additional information.</p>

7	8	9	10
BEAM ANGLE	DRIVER	VOLTAGE	HANGING ACCESSORIES
<input type="checkbox"/> 110°	<input type="checkbox"/> V010-1 0-10V, dim to 1% For other dimming options contact Mercury	<input type="checkbox"/> UNIV 120VAC-277 VAC	<input type="checkbox"/> SC Standard