

CANOPY PENDANT DIRECT LUMINAIRE



MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating

OPTION A:
SHADE: PC

OPTION B:
SHADE: Aluminum Spinning Processing, Electrostatic Powder Coating

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	85W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F


TYPE OF LED

COB


WARRANTY

50 000 hours at 77 °F

DIMENSIONS

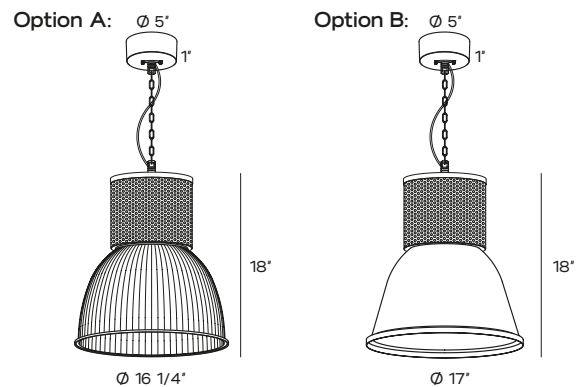

PHOTOMETRICS

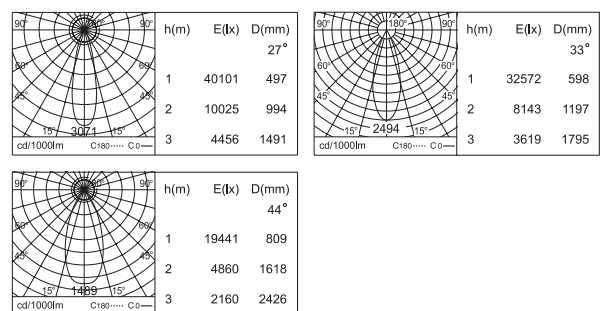

Fixture type:	Job information:



Option A:
Polycarbonate Shade



Option B:
Aluminum Shade



PRODUCT DEFINITION SHEET

1	2	3	4	5	6
7	8	9	10	11	

1	2	3	4	5
SERIES	MOUNTING	MATERIAL	WATTAGE	LUMEN OUTPUT
<input type="checkbox"/> VES16	<input type="checkbox"/> DS Suspended	<input type="checkbox"/> PS Polycarbonate Shade <input type="checkbox"/> AS Aluminum Shade	<input type="checkbox"/> 85W	<input type="checkbox"/> 10000 lm

6	7	8	9
COLOR TEMP	FINISH	BEAM ANGLE	DRIVER
<input type="checkbox"/> 90 CRI	<input type="checkbox"/> W White	<input type="checkbox"/> 28°	<input type="checkbox"/> V010-1 0-10V, dim to 1%
<input type="checkbox"/> 27K	<input type="checkbox"/> G Grey	<input type="checkbox"/> 33°	For other dimming options contact Mercury
<input type="checkbox"/> 30K	<input type="checkbox"/> B Black	<input type="checkbox"/> 44°	
<input type="checkbox"/> 35K	<input type="checkbox"/> C Custom		
<input type="checkbox"/> 40K	Custom powder coat color matching is available for a setup fee. Consult Mercury Lighting for additional information.		

10	11
VOLTAGE	HANGING ACCESSORIES
<input type="checkbox"/> UNIV 120VAC-277 VAC	<input type="checkbox"/> SC Round 5" standard