
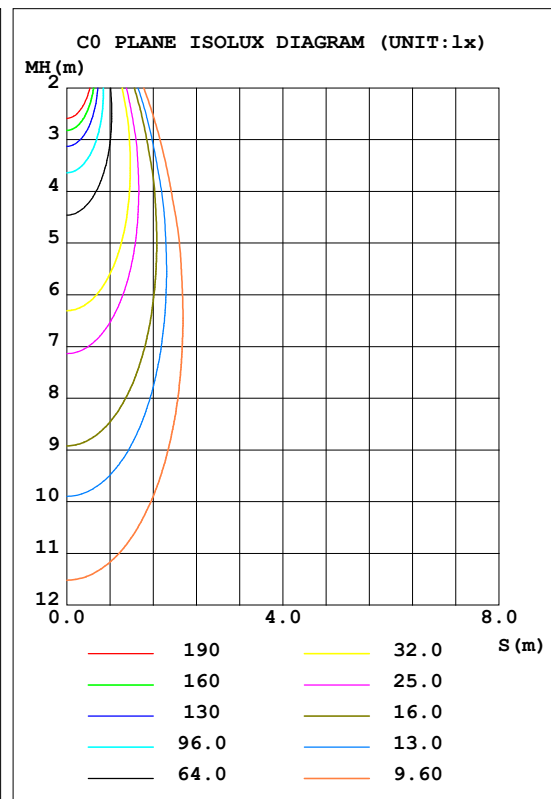


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm		
NAME: ML-CI124 24°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Mercury Lighting	SUR.:40*40mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 50.67 lm/W			
MODEL		I _{max} (cd)	1314	S/MH (C0/180)	0.50
NOMINAL POWER (W)	8.8	LOR (%)	100.0	S/MH (C90/270)	0.47
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	445.93	η UP, DN (C0-180)	0.0,50.0
NOMINAL FLUX (lm)	445.934	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	100.0	CIBSE SHR MAX	0.50

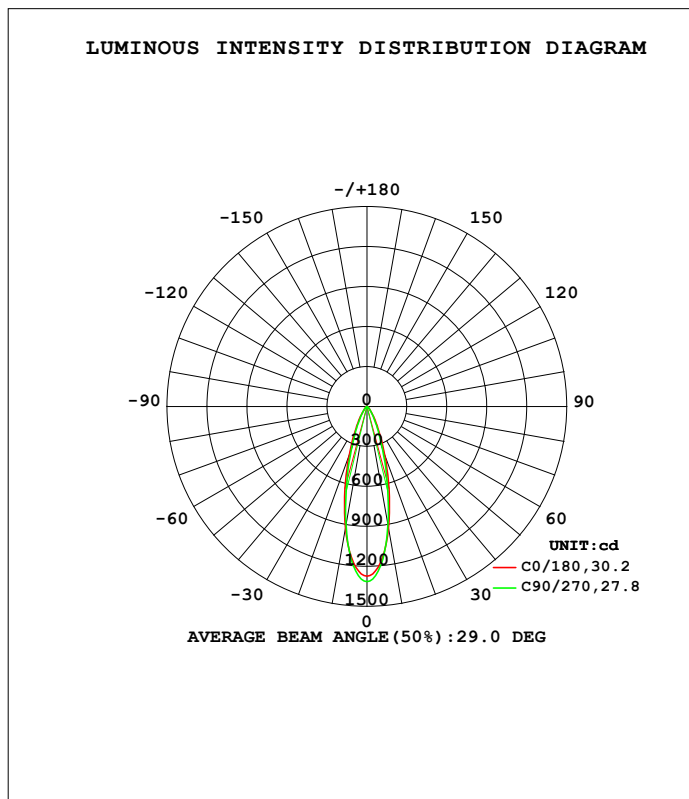

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	931.2	914.5	909.1	914.5	931.2	914.5	909.1	914.5	0- 10	104.5	104.5	23.4,23.4
20	399.4	364.6	349.5	364.6	399.4	364.6	349.5	364.6	10- 20	168.3	272.9	61.2,61.2
30	131.5	119.8	114.0	119.8	131.5	119.8	114.0	119.8	20- 30	100.3	373.1	83.7,83.7
40	43.71	41.17	39.74	41.17	43.71	41.17	39.74	41.17	30- 40	45.38	418.5	93.9,93.9
50	14.64	14.00	13.64	14.00	14.64	14.00	13.64	14.00	40- 50	19.60	438.1	98.2,98.2
60	3.229	2.970	2.889	2.970	3.229	2.970	2.889	2.970	50- 60	6.787	444.9	99.8,99.8
70	0.1100	0.0634	0.0702	0.0634	0.1100	0.0634	0.0702	0.0634	60- 70	1.005	445.9	100,100
80	0.0067	0.0050	0.0133	0.0050	0.0067	0.0050	0.0133	0.0050	70- 80	0.0224	445.9	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0022	445.9	100,100
100	0	0	0	0	0	0	0	0	90-100	0	445.9	100,100
110	0	0	0	0	0	0	0	0	100-110	0	445.9	100,100
120	0	0	0	0	0	0	0	0	110-120	0	445.9	100,100
130	0	0	0	0	0	0	0	0	120-130	0	445.9	100,100
140	0	0	0	0	0	0	0	0	130-140	0	445.9	100,100
150	0	0	0	0	0	0	0	0	140-150	0	445.9	100,100
160	0	0	0	0	0	0	0	0	150-160	0	445.9	100,100
170	0	0	0	0	0	0	0	0	160-170	0	445.9	100,100
180	0	0	0	0	0	0	0	0	170-180	0	445.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm		
NAME: ML-CI124 24°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Mercury Lighting	SUR.: 40*40mm	Shielding Angle:

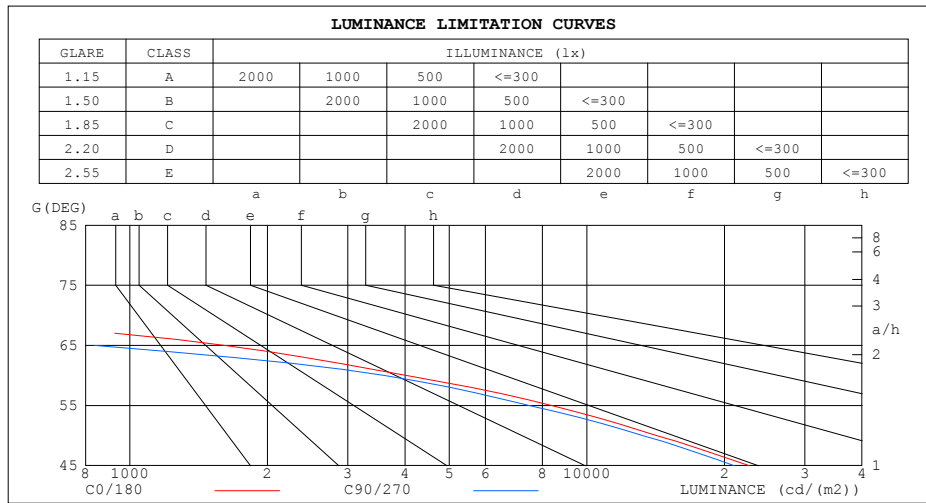

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	24
80	24	48
75	32	56
70	201	128
65	1612	838
60	4037	3611
55	8387	7501
50	14238	13266
45	22703	21052


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm		
NAME: ML-CI124 24°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Mercury Lighting	SUR.: 40*40mm	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization (CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.05	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	.00	.95	.92	.98	.94	.91	.96	.92	.90	.93	.91	.88	.91	.89	.87	.86
4.0	.94	.90	.86	.93	.89	.86	.91	.88	.85	.89	.86	.84	.88	.85	.83	.81
5.0	.90	.85	.81	.89	.84	.81	.87	.83	.80	.86	.82	.80	.84	.81	.79	.78
6.0	.86	.81	.77	.85	.80	.77	.83	.79	.76	.82	.79	.76	.81	.78	.75	.74
7.0	.82	.77	.73	.81	.76	.73	.80	.76	.73	.79	.75	.72	.78	.75	.72	.71
8.0	.78	.73	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.75	.72	.69	.68
9.0	.75	.70	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65
10.0	.72	.67	.64	.72	.67	.64	.71	.67	.64	.70	.67	.64	.70	.66	.64	.63

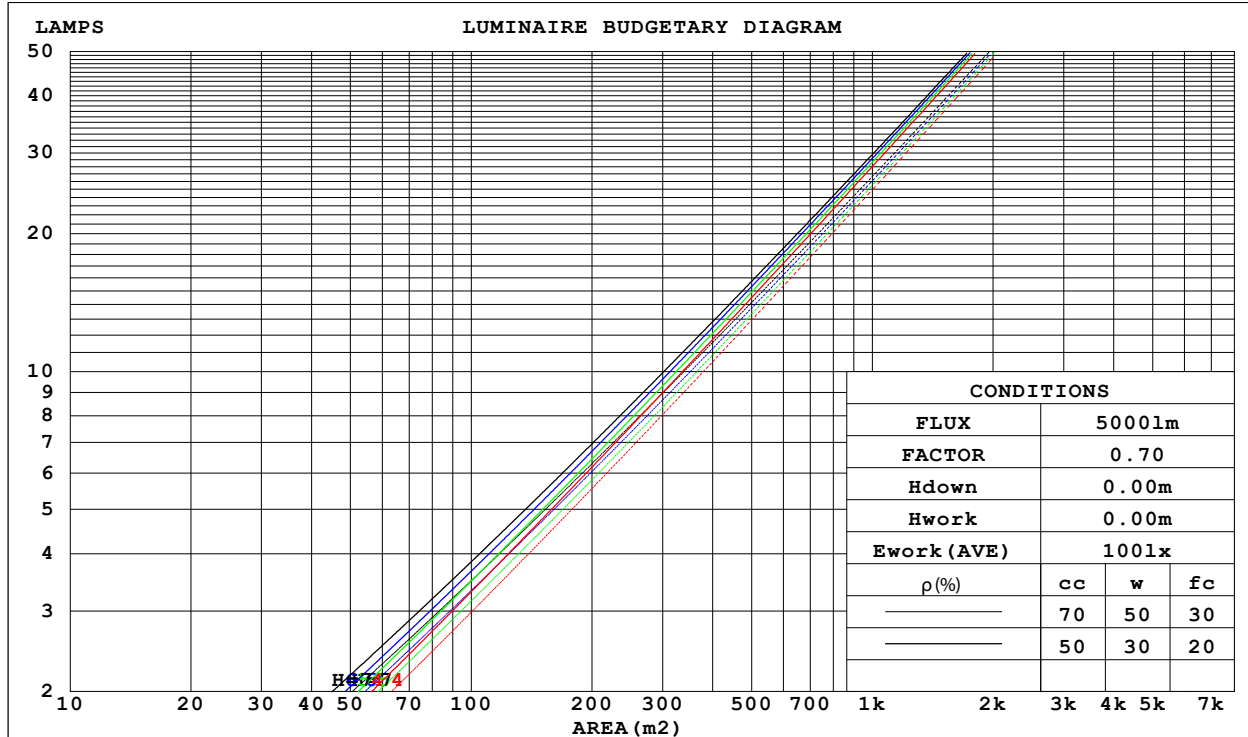

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm		
NAME: ML-CI124 24°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Mercury Lighting	SUR.:40*40mm	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.157	.089	.028	.150	.086	.027	.138	.079	.025	.126	.073	.023	.116	.067	.022	
2.0	.148	.081	.025	.143	.079	.024	.132	.074	.023	.123	.069	.022	.114	.064	.020	
3.0	.140	.075	.022	.136	.073	.022	.127	.069	.021	.119	.065	.020	.111	.062	.019	
4.0	.133	.069	.020	.129	.067	.020	.121	.064	.019	.114	.061	.019	.108	.059	.018	
5.0	.126	.064	.019	.122	.063	.018	.116	.060	.018	.110	.058	.017	.104	.056	.017	
6.0	.120	.060	.017	.117	.059	.017	.111	.057	.017	.106	.055	.016	.101	.053	.016	
7.0	.114	.056	.016	.111	.056	.016	.107	.054	.016	.102	.052	.015	.098	.051	.015	
8.0	.109	.053	.015	.107	.052	.015	.102	.051	.015	.098	.050	.014	.094	.048	.014	
9.0	.104	.050	.014	.102	.050	.014	.098	.049	.014	.095	.047	.014	.091	.046	.013	
10.0	.100	.048	.013	.098	.047	.013	.095	.046	.013	.091	.045	.013	.088	.044	.013	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.115	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.113	.093	.120	.098	.080	.082	.068	.056	.047	.040	.033	.015	.013	.011	
4.0	.128	.098	.076	.110	.085	.066	.076	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.119	.086	.063	.102	.075	.055	.070	.052	.039	.041	.031	.023	.013	.010	.008	
6.0	.110	.077	.053	.095	.067	.046	.065	.047	.032	.038	.027	.019	.012	.009	.006	
7.0	.103	.069	.045	.089	.060	.039	.061	.042	.028	.036	.025	.016	.012	.008	.005	
8.0	.097	.062	.038	.084	.054	.034	.058	.038	.024	.034	.022	.014	.011	.007	.005	
9.0	.092	.057	.033	.079	.049	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004	
10.0	.087	.052	.029	.075	.046	.026	.052	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm										
NAME: ML-CI124 24°					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Mercury Lighting					SUR.:40*40mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.4	20.2	19.6	20.4	20.5	19.0	19.8	19.2	19.9	20.1
3H	19.2	20.0	19.5	20.2	20.4	18.8	19.5	19.1	19.7	19.9
4H	19.2	19.9	19.4	20.1	20.3	18.7	19.4	19.0	19.6	19.8
6H	19.1	19.7	19.4	20.0	20.2	18.6	19.3	18.9	19.5	19.8
8H	19.0	19.7	19.3	19.9	20.2	18.6	19.2	18.9	19.5	19.7
12H	19.0	19.6	19.3	19.9	20.1	18.5	19.2	18.9	19.4	19.7
4H 2H	19.2	19.9	19.5	20.1	20.3	18.8	19.5	19.0	19.7	19.9
3H	19.0	19.6	19.3	19.9	20.2	18.6	19.2	18.9	19.5	19.7
4H	18.9	19.5	19.3	19.8	20.1	18.5	19.1	18.8	19.3	19.7
6H	18.8	19.3	19.2	19.7	20.0	18.4	18.9	18.8	19.2	19.6
8H	18.8	19.2	19.2	19.6	20.0	18.4	18.8	18.7	19.2	19.5
12H	18.7	19.2	19.1	19.5	19.9	18.3	18.7	18.7	19.1	19.5
8H 4H	18.8	19.2	19.2	19.6	20.0	18.4	18.8	18.7	19.2	19.5
6H	18.7	19.1	19.1	19.4	19.9	18.2	18.6	18.7	19.0	19.4
8H	18.6	19.0	19.1	19.4	19.8	18.2	18.5	18.6	18.9	19.4
12H	18.6	18.8	19.0	19.3	19.8	18.1	18.4	18.6	18.8	19.3
12H 4H	18.7	19.2	19.1	19.5	19.9	18.3	18.7	18.7	19.1	19.5
6H	18.6	19.0	19.1	19.4	19.8	18.2	18.5	18.6	18.9	19.4
8H	18.6	18.8	19.0	19.3	19.8	18.1	18.4	18.6	18.8	19.3
Variations with the observer position at spacings:										
S = 1.0H	+ 2.7 / - 6.9					+ 2.4 / - 7.1				
1.5H	+ 3.8 / - 4.7					+ 3.4 / - 4.6				
2.0H	+ 5.0 / -10.1					+ 4.8 / -10.9				

CIE Pub.117, 445.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.8)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm		
NAME: ML-CI124 24°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Mercury Lighting	SUR.:40*40mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	88	81	78	87	81	77	86	81	77	74
0.80	95	89	86	94	89	86	93	88	85	81
1.00	100	94	91	99	94	90	97	93	90	86
1.25	104	98	95	103	98	95	101	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm		
NAME: ML-CI124 24°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Mercury Lighting	SUR.:40*40mm	Shielding Angle:

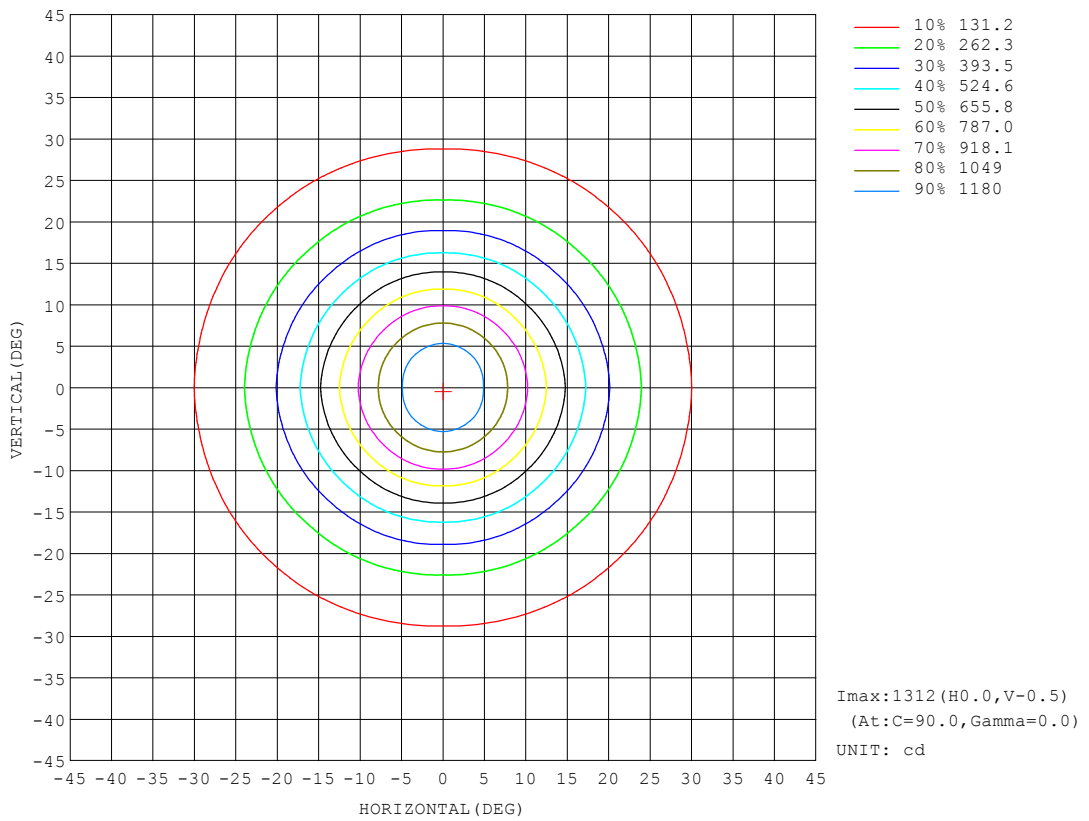


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm		
NAME: ML-CI124 24°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Mercury Lighting	SUR.:40*40mm	Shielding Angle:

Flux out:176.3 lm

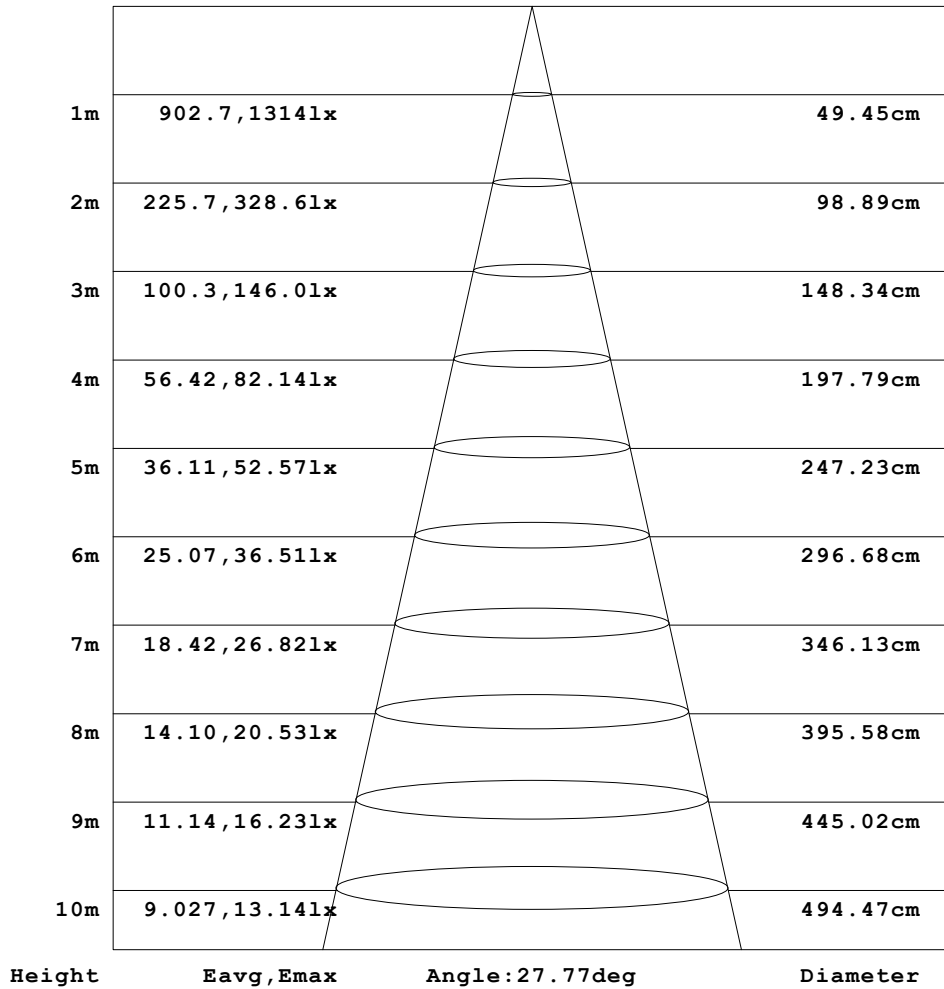


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-07-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm		
NAME: ML-CI124 24°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Mercury Lighting	SUR.: 40*40mm	Shielding Angle:

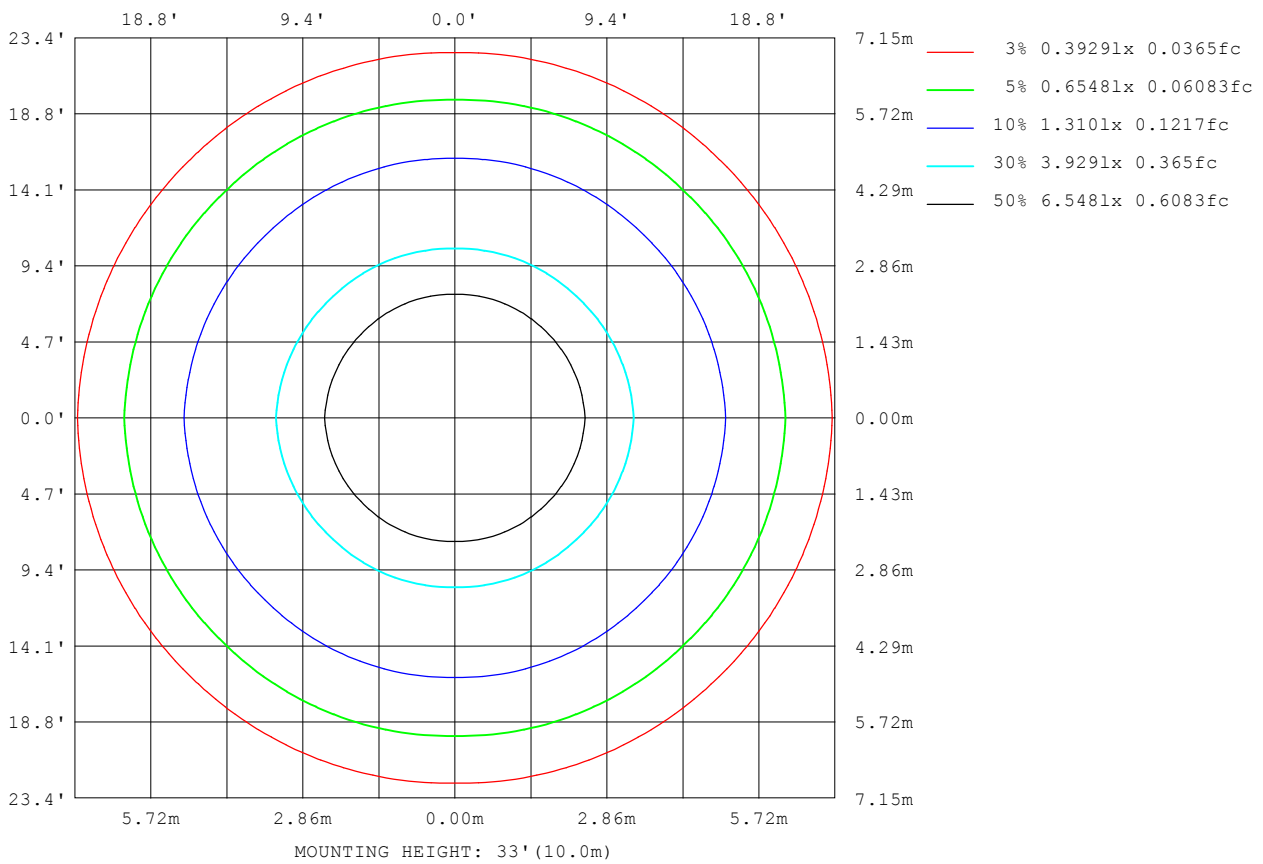

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm		
NAME: ML-CI124 24°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Mercury Lighting	SUR.:40*40mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1612
L_0~180 (75) av	32
L_0~180 (85) av	0
L_90~270 (65) av	838
L_90~270 (75) av	56
L_90~270 (85) av	24
L_45 (65) av	1014
L_45 (75) av	20
L_45 (85) av	12

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

Planar Illuminance Curve

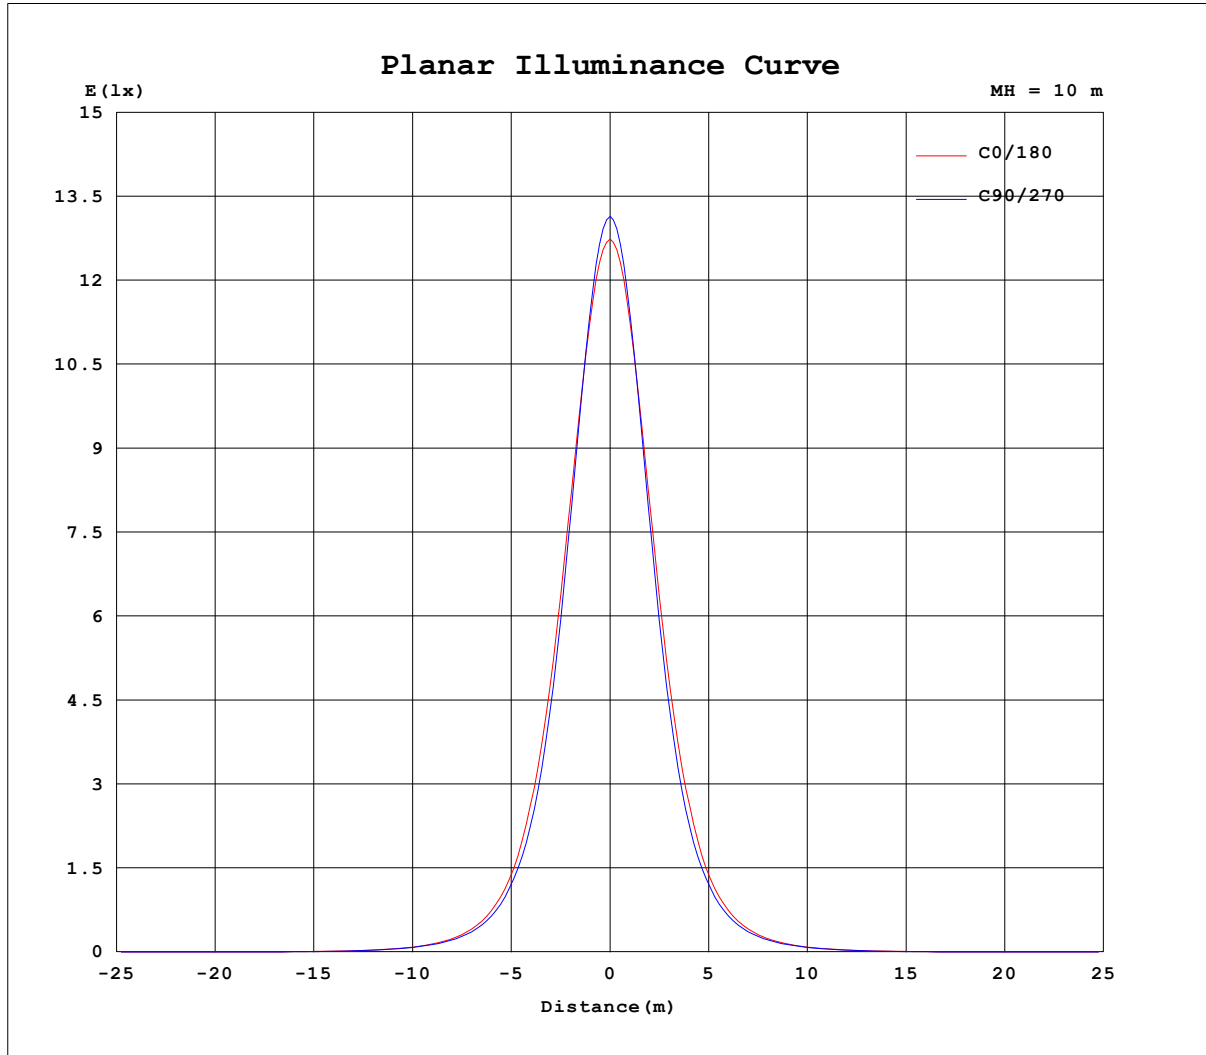

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.0V I:0.0420A P:8.800W PF:0.9470 Freq:50.00Hz Lamp Flux:445.934x1 lm		
NAME: ML-CI124 24°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Mercury Lighting	SUR.: 40*40mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1274	1300	1314	1300	1274	1300	1314	1300										
5	1176	1189	1196	1189	1176	1189	1196	1189										
10	931	915	909	915	931	915	909	915										
15	643	607	592	607	643	607	592	607										
20	399	365	350	365	399	365	350	365										
25	231	209	201	209	231	209	201	209										
30	131	120	114	120	131	120	114	120										
35	75.1	69.4	66.3	69.4	75.1	69.4	66.3	69.4										
40	43.7	41.2	39.7	41.2	43.7	41.2	39.7	41.2										
45	25.7	24.5	23.8	24.5	25.7	24.5	23.8	24.5										
50	14.6	14.0	13.6	14.0	14.6	14.0	13.6	14.0										
55	7.70	7.14	6.88	7.14	7.70	7.14	6.88	7.14										
60	3.23	2.97	2.89	2.97	3.23	2.97	2.89	2.97										
65	1.09	0.69	0.57	0.69	1.09	0.69	0.57	0.69										
70	0.11	0.06	0.07	0.06	0.11	0.06	0.07	0.06										
75	0.01	0.01	0.02	0.01	0.01	0.01	0.02	0.01										
80	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01										
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks: