

LIGHTSTREAMS

MLD3-M SERIES ⚡ LIGHTNING PROGRAM

UPDATED ON 12-05-24



DROP OR FLAT LENS
SUSPENDED OR SURFACE MOUNT

Architectural Linear LED Illuminating System | LIGHTSTREAMS 3



Features

- Extruded aluminum housing for perfectly straight lines of light.
- Narrow 3-inch wide profile.
- Linear lengths; 2-ft. and above in increments of one- inch.
- Custom formulated high diffusion extruded acrylic lens.
- Featured lens is a 1/2-inch drop style.
- Optional: 1-inch or 1-1/2-inch drop lens.
- Optional: flat style lens.
- Non-glare matte-white polyester powder coating finish.
- Cable or stem mount from ceiling, or direct surface mount.
- Cataloged standard or custom set lumens-per-foot performances.
- 80 CRI standard. 90 CRI available.
- Continuous dimming capability down to 1% on 0-10V controls.
- Fixture lumens per watt ratios up to 123.
- Tunable white feature optional.
- Standard and custom corners
- American Made.
- Lightning Program eligible (ships in 15 days or less): See ordering data for options. ⚡

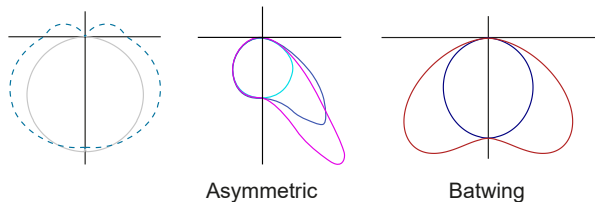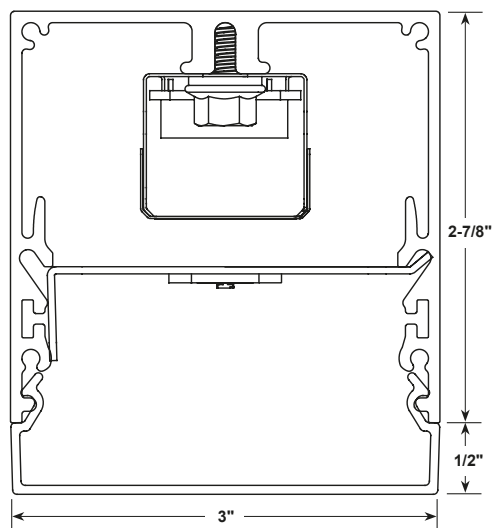

Performance

Based on 4Ft. Module, 3500K, 80 CRI- Signify LV6 LED Boards

| Lumens per Foot | Total Lumens | Watts | LPW |
|-----------------|--------------|-------|-----|
| A05 LENS | | | |
| 400 | 1600 | 13.9 | 115 |
| 500 | 2000 | 17.4 | 115 |
| 625 | 2500 | 22.0 | 114 |
| 985 | 3940 | 36.3 | 109 |
| A10 LENS | | | |
| 400 | 1600 | 13.9 | 115 |
| 500 | 2000 | 17.4 | 115 |
| 625 | 2500 | 22.0 | 114 |
| 985 | 3940 | 36.3 | 109 |
| A15 LENS | | | |
| 400 | 1600 | 13.0 | 123 |
| 500 | 2000 | 16.2 | 123 |
| 625 | 2500 | 20.5 | 122 |
| 1050 | 4200 | 37.9 | 111 |

Multiplier for other Color Temp (K)

| | |
|-------|------|
| 3000K | 97% |
| 3500K | 100% |
| 4000K | 102% |
| 5000K | 103% |




Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

Based on 4Ft. Module, 3500K, 80 CRI, Special Asymmetric Lens

| Lumens per Foot | Total Lumens (4Ft) | System Watts (W) | Lumens per Watt (LPW) |
|-----------------|--------------------|------------------|-----------------------|
| 400 | 1600 | 11.0 | 145 |
| 500 | 2000 | 13.8 | 145 |
| 625 | 2500 | 17.5 | 143 |
| 825 | 3300 | 23.7 | 139 |
| 1305 | 5220 | 39.3 | 133 |

Multiplier for other Color Temp (K)

| | |
|-------|------|
| 3000K | 97% |
| 3500K | 100% |
| 4000K | 102% |
| 5000K | 103% |




Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

Based on 4Ft. Module, 3500K, 80 CRI, Special Batwing Lens

| Lumens per Foot | Total Lumens (4Ft) | System Watts (W) | Lumens per Watt (LPW) |
|-----------------|--------------------|------------------|-----------------------|
| 400 | 1600 | 11.6 | 138 |
| 500 | 2000 | 14.7 | 136 |
| 625 | 2500 | 18.7 | 134 |
| 825 | 3300 | 24.3 | 136 |
| 1275 | 5100 | 39.4 | 129 |

Multiplier for other Color Temp (K)

| | |
|-------|------|
| 3000K | 97% |
| 3500K | 100% |
| 4000K | 102% |
| 5000K | 103% |



Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

Fixture Type:

Job Information:



MLD3-M Series | LIGHTSTREAMS 3

Architectural Linear LED Illuminating System | Drop or Flat Lens Suspended or Surface Mount

Ex: MLD3-M-144-625-35K-A05-1%-U-EM12

Options

| Series | Mounting | Module or Row Length | Lumens/ Ft | Color Temp | Diffuser | Driver | Voltage | Standby Modules* | Misc. | |
|---|-------------------------------|---|--|---|--|---|---|---|---|--|
| MLD3 LightStreams 3 LP-MLD3 Lightning Program | M Suspended Cable Mount | 48 48" Length | 400 A05 500 LENS 625 985 | 80 CRI 30K 35K 40K 50K Upon Request | A05 1/2" Drop A10 1" Drop A15 1-1/2" Drop ASO Flat ASYM Asymmetric BW Batwing Distribution | 1% 0-10% Dimming 1% DD 0-10% Dimming Dim to Dark SR Sensor Ready (Required for Certain Controls, Contact Factory) eL eldoLED Solo 0.1% LDE1 Lutron Hi- Lume | U Uni 120V-277V 1 120V 7 277V X As Specified | EM7 EM10 EM12 <div>No Option</div> | WL UL "Suitable for Wet Locations" labeled. CCEA Meets the City of Chicago Environmental Air specifications. | |
| | | 96 96" Length | 400 A10 500 LENS 625 985 | | | | | | | |
| | M1 Surface Mount | 144 144" Length | 400 A15 500 LENS 625 1050 | 90 CRI 927K 930K 935K 940K | | | | | | |
| | | Custom or Row Length. 24" and above in 1" Increments. Ex. in inches: 82, 384, etc. | 400 ASYM 500 LENS 625 825 1305 | | | | | | | |
| | M2 Suspended Stem Mount | | | 400 500 625 825 1305 | | | | | | |
| | | | | 400 500 625 825 1275 | | | | | | |
| | | | | BATWING LENS | | | | | | |
| | | | | Custom Lumen Package. Contact Factory | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

All options highlighted in **BLUE** are eligible for **Lightning Program** (same quality product, shipped in 15 days or less)

*Available in modules of 4-ft. and longer.

Housings

Extruded aluminum profile in a 0.080-inch wall thickness.

Maximum length of each linear component is 12-ft.

.060 aluminum ends are provided where needed at row termini.

A one-piece 14GA galvanized steel joiner/aligner bracket is provided for each joint between housings.

Internal cold-rolled steel components.

Standard or custom hanging points are provided.

A custom formulated non-glare matte-white polyester powder coating provides an extremely durable and long-lasting finish.

Custom color finishes on request.

Diffusers

Seamless fit diffusers. Flawless and consistent end-to-end fit.

Extruded from custom formulated acrylic smooth opal material.

Allows maximum light transmission while eliminating pixilation and hot spots.

Standard diffuser is 1/2-inch drop style.

Optional diffusers; 1-inch or 1-1/2-inch drop style or flat style.

Smooth finish compliments the architectural elements.

LED Modules

High performance linear configured LED module boards.

Each board consists of multiple mid-power, high efficacy LEDs in a precise layout eliminating the need for supplemental heat sinking.

The boards produce an even and diffuse light which maximizes optical efficiency.

Compatible with the dimming performance of the LED driver.

Color temperatures available 80 CRI: 3000K, 3500K and 4000K. Upon request: 5000K.

Color temperatures available 90 CRI: 2700K, 3000K, 3500K and 4000K.



Tunable White Option

Field tunable range 2700K through 6500K. 80CRI.

LED Drivers

Factory programmable constant current LED power supply.

Multiple standard drive current outputs (factory set by Mercury) are cataloged with their corresponding lumens-per-foot offering. Upon request, custom drive current outputs and lumens-per-foot options are available.

Note: Certain cataloged lumens-per-foot offerings may be provided with a non-programmable constant current LED power supply at Mercury's discretion. Contact factory if critical.

Universal voltage input, 120V-277V, 50HZ-60HZ.

Continuous dimming capability down to 1%-standard.

0.1% available upon request.

Dim to Dark option available upon request.

Sensor ready (SR) drivers compatible with most lighting controls are optional. Consult factory.

Lutron driver available: LDE1 series.

Standby Lighting Options

Self-contained module, 7W, 10W or 12W as specified.

Battery backup upon loss of power. Available in modules of 4-Ft. and longer.

Corners

Standard 90 degree corners.

Custom angled corners.

Installations

Designed to be suspended on cables. Specify **M**

For direct surface mounting to most ceiling types, specify **M1** and consult factory.

For stem mounting specify **M2** and consult factory.

Lengths of 12-ft. and less to use one housing with two ends pre-installed.

Lengths over 12-ft. will be engineered to job requirements using multiple housings with one end pre-installed at each row end.

Lengths over 12-ft. will include appropriate job required quick-connect plug-thru wire harnesses and housing joiners.

All individual modules or multiple module runs to include

job required feed wire as specified.

Standard or custom hanging points will be provided per job specifications.

Certificate of Safety Compliance and Listings

Luminaire: UL and CUL listed 1598 and bears their label. Suitable for damp locations.

Optional: Suitable for wet locations marking is available. Some limitations apply. Contact factory for all details.

Lightning Program

Same quality product, shipped in 15 days or less (if drawings are required, 15 days or less starts after drawings are released).

Entire order must qualify for **Lightning Program** in order to meet freight charges. Please contact our sales team if unsure your order will qualify.

Options highlighted in Blue, 500 linear feet or less, are eligible for quick ship **Lightning Program**.

Relates to straight runs ONLY.

Other variations not highlighted in blue may be available under **Lightning Program**. Please consult factory.

Specify **LP-MLD3** when placing order if you would like to use **Lightning Program**.

Warranty

5-year limited warranty is standard. Special 10-year warranty available on a job-to-job basis. Complete LED warranty terms available at www.mercltg.com.

Actual performance may differ as a result of end-user environment and application.

Most LED luminaires are suitable to operate in ambient temperatures from -20C (-4F) to 25C (77F).

The following exclusions apply: Luminaires with standby lighting option, integral lighting controls options, or wireless control options.


Consult factory.

LM-79 testing was measured under a controlled 25C (77F) ambient operating temperature.


MLD3-M Series | **LIGHTSTREAMS 3** ⚡

Architectural Linear LED Illuminating System | Drop or Flat Lens Suspended or Surface Mount

Dimensional Data

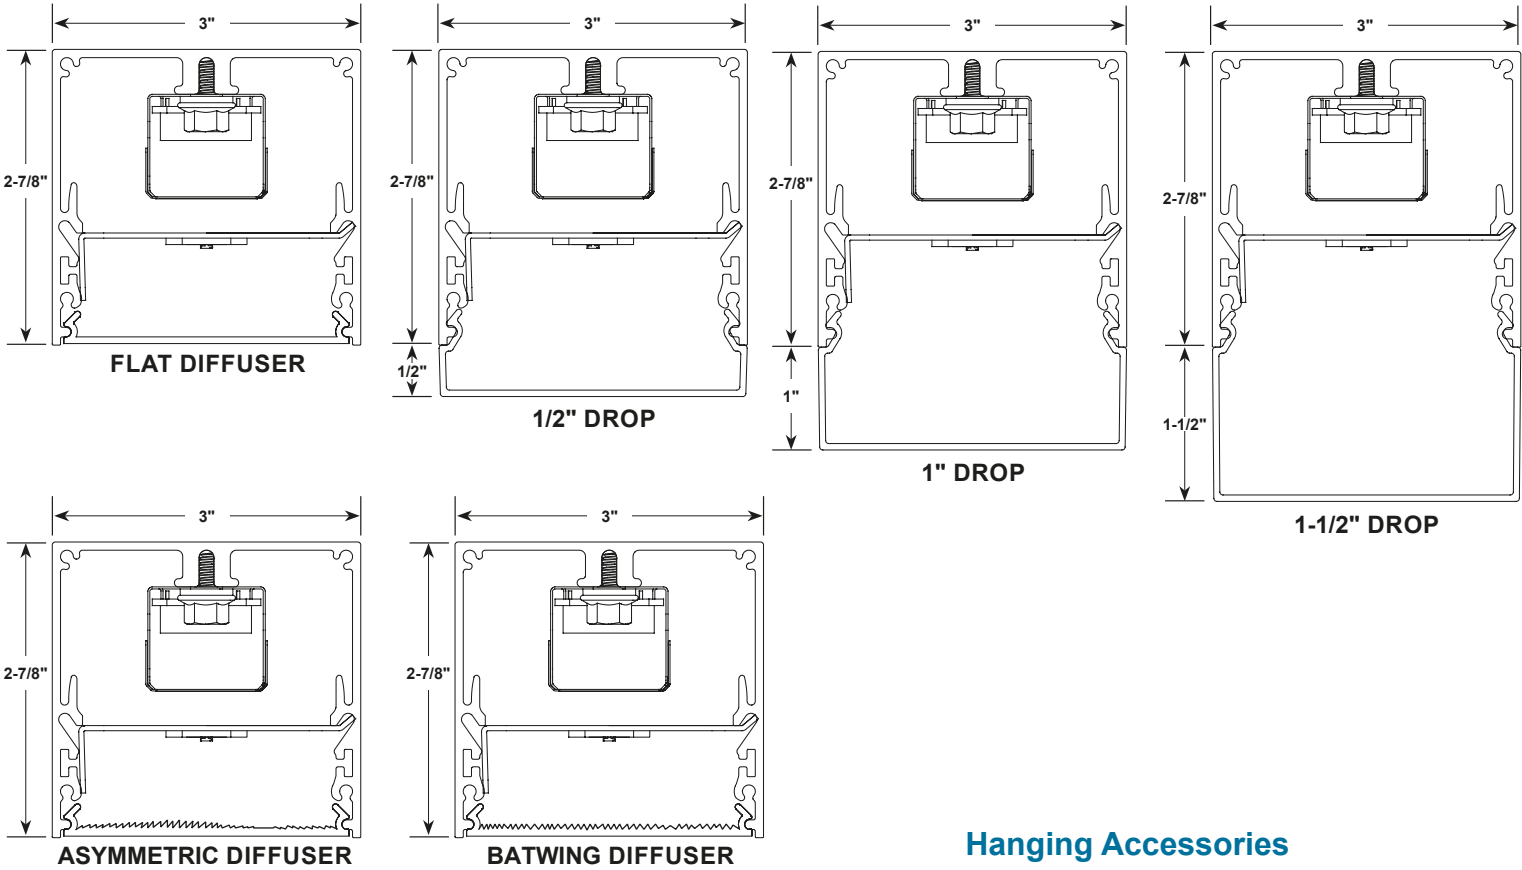


Mounting Information

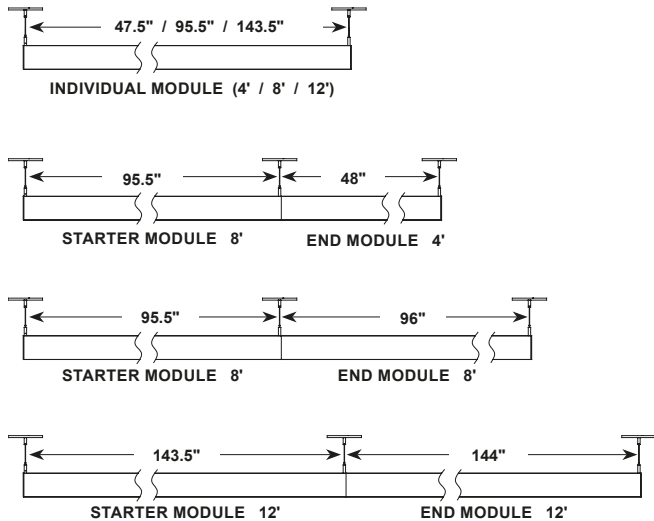

Consult factory for additional row length information



Hanging Accessories

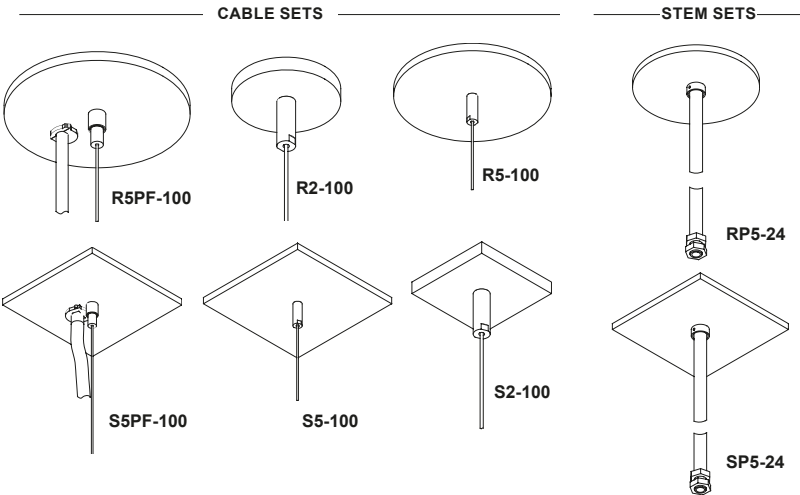

| Part # | Description |
|----------|---|
| R5PF-100 | Round 5" power feed canopy, Hanging hardware, 100" long 1/16" cable. |
| R5-100 | Round 5" canopy, Hanging hardware, 100" long 1/16" cable. |
| R2-100 | Round 2" canopy, Hanging hardware, 100" long 1/16" cable. |
| S5PF-100 | Square 5" power feed canopy, Hanging hardware, 100" long 1/16" cable. |
| S5-100 | Square 5" canopy, Hanging hardware, 100" long 1/16" cable. |
| S2-100 | Square 2" canopy, Hanging hardware, 100" long 1/16" cable. |
| RP5-24 | Round 5" canopy, Hanging hardware, 24" long 1/2" dia. stem. |
| SP5-24 | Square 5" canopy, Hanging hardware, 24" long 1/2" dia. stem. |

Other cable and stem lengths available. Consult factory.