



# MLD2

**DROP OR FLAT LENS  
SUSPENDED OR SURFACE MOUNT**

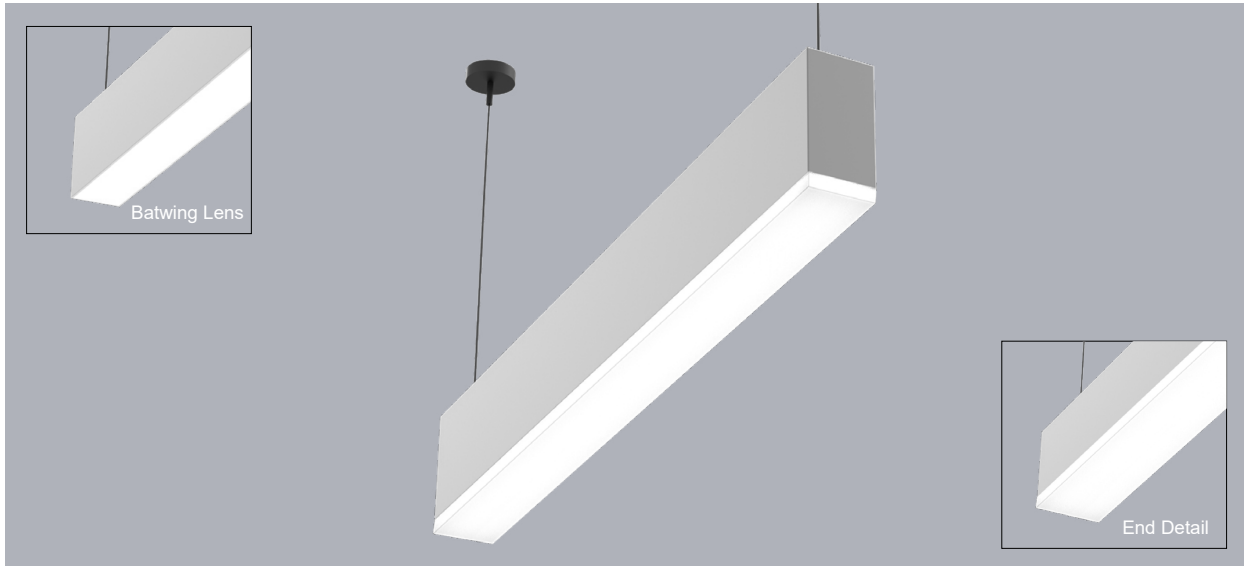


### SHAPES/PATTERNS/RUNS

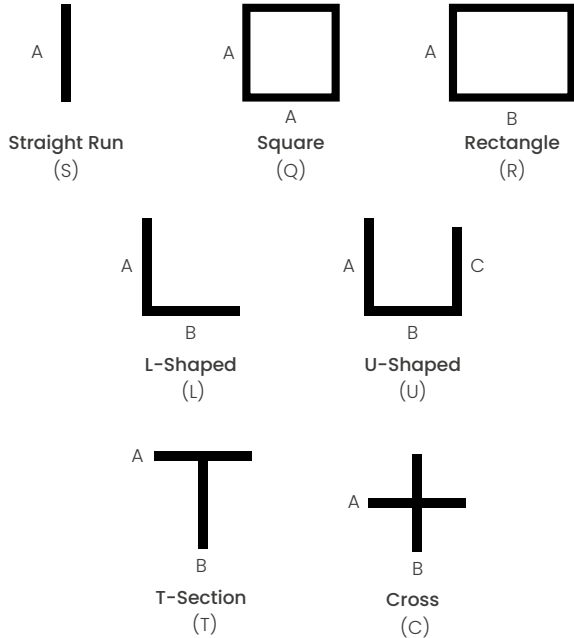

For other shapes/patterns/runs consult the factory.

### FEATURES

- Extruded aluminum housing.
- Narrow 1 7/8" wide profile.
- Linear lengths of 2-ft and above in increments of one-inch.
- Custom formulated high diffusion extruded acrylic lens.
- Featured lens is a 1/2-inch drop style.
- Optional: 1-inch or 1-1/2-inch drop lens.
- Optional: flat style lens.
- Non-glare matte-white polyester powder coat finish.
- Cable or stem mount from ceiling, or direct surface mount.
- Cataloged standard or custom set lumens-per-foot performances.
- 80 CRI standard. 90 CRI available.
- Continuous dimming capability down to 1% on 0-10V controls.
- Fixture lumens per watt ratios up to 119.
- Tunable white feature optional.
- Standard and custom corners
- American Made.
- Lightning Program eligible (ships in 15 days or less): See ordering data for options.

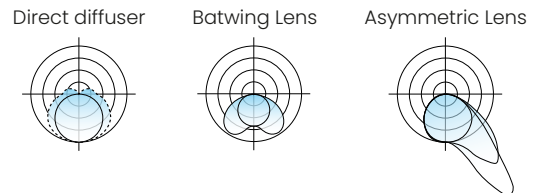

Fixture type:	Job information:
<input type="text"/>	<input type="text"/>

# MLD2

## DROP OR FLAT LENS

### SUSPENDED OR SURFACE MOUNT



#### PRODUCT DEFINITION SHEET

All options highlighted in **BLUE** are eligible for **Lightning Program** (same quality product, shipped in 15 days or less)  
 Ex: **MLD3-M-144-S18-625-35K-A05-1-U-EM12-BABA-SR-AU**

1	2	3	4	5	6	7	8	9	10	11	12	13
---	---	---	---	---	---	---	---	---	----	----	----	----

1	2	3	4
SERIES	MOUNTING	LENGTH	SHAPE (ENTER LENGTH IN PRODUCT CODE ABOVE)
<input type="checkbox"/> <b>MLD2</b> LightStreams 2  <input type="checkbox"/> <b>LP-MLD2</b> Lightning Program	<input type="checkbox"/> <b>M</b> Suspended Cable Mount  <input type="checkbox"/> <b>M1</b> Surface Mount  <input type="checkbox"/> <b>M2</b> Suspended Stem Mount	<input type="checkbox"/> <b>48</b> 48" Length <input type="checkbox"/> <b>96</b> 96" Length <input type="checkbox"/> <b>144</b> 144" Length  Custom or Row Length. 24" and above in 1" increments. Ex. in inches: 82, 384, etc.	<input type="checkbox"/> <b>S__</b> Individual/Straight Run Section (enter length, ex. S18) <input type="checkbox"/> <b>Q__</b> Square Configuration (enter side length A, ex: Q18) <input type="checkbox"/> <b>R_/_/_</b> Rectangular Configuration (enter side lengths A and B, ex. R12/24) <input type="checkbox"/> <b>L_/_/_</b> L-Shaped Configuration (enter side lengths A and B, ex. L12/24) <input type="checkbox"/> <b>U_/_/_/_</b> U-Shaped Configuration (enter side lengths A, B, and C, ex. U12/12/24) <input type="checkbox"/> <b>T_/_/_</b> T-Section (enter side lengths A and B, ex. T12/24) <input type="checkbox"/> <b>C_/_/_</b> Cross Configuration (enter side lengths A and B, ex. C12/24)

All corners of shape must be 90°, same plane. Lengths greater than 8' consist of multiple individual housing sections joined together. Lengths are nominal and may vary based on lamping and other specification selections. Consult Mercury when exact lengths are required. Consult factory for corners other than 90°

5	6	7	8	9
LUMENS/FT	COLOR TEMP-CCT	DIFFUSER	DRIVER	VOLTAGE
<b>A05</b> <input type="checkbox"/> <b>400</b> <input type="checkbox"/> <b>500</b> <input type="checkbox"/> <b>625</b> <input type="checkbox"/> <b>825</b> <input type="checkbox"/> <b>950</b> <b>A10</b> <input type="checkbox"/> <b>400</b> <input type="checkbox"/> <b>500</b> <input type="checkbox"/> <b>625</b> <input type="checkbox"/> <b>825</b> <input type="checkbox"/> <b>1000</b> <b>A10</b> <input type="checkbox"/> <b>400</b> <input type="checkbox"/> <b>500</b> <input type="checkbox"/> <b>625</b> <input type="checkbox"/> <b>825</b> <input type="checkbox"/> <b>1025</b> Custom Lumen Packages.	<b>ASYM LENS</b> <input type="checkbox"/> <b>400</b> <input type="checkbox"/> <b>500</b> <input type="checkbox"/> <b>625</b> <input type="checkbox"/> <b>825</b> <input type="checkbox"/> <b>1180</b>  <b>BW</b> <input type="checkbox"/> <b>400</b> <input type="checkbox"/> <b>500</b> <input type="checkbox"/> <b>625</b> <input type="checkbox"/> <b>825</b> <input type="checkbox"/> <b>1050</b> <input type="checkbox"/> <b>1090</b>	<b>80 CRI</b> <input type="checkbox"/> <b>30K</b> 3000K <input type="checkbox"/> <b>35K</b> 3500K <input type="checkbox"/> <b>40K</b> 4000K <input type="checkbox"/> <b>50K</b> 5000K Upon request <input type="checkbox"/> <b>TW</b> Tunable White 2700K-6500K  <b>90 CRI</b> <input type="checkbox"/> <b>927K</b> 2700K <input type="checkbox"/> <b>930K</b> 3000K <input type="checkbox"/> <b>935K</b> 3500K <input type="checkbox"/> <b>940K</b> 4000K	<input type="checkbox"/> <b>A05</b> 1/2" Drop <input type="checkbox"/> <b>A10</b> 1" Drop <input type="checkbox"/> <b>A15</b> 1-1/2" Drop <input type="checkbox"/> <b>ASO</b> Flat <input type="checkbox"/> <b>ASYM</b> Asymmetric <input type="checkbox"/> <b>BW</b> Batwing <input type="checkbox"/> <b>Distribution</b>	<input type="checkbox"/> <b>1</b> 0-10V 1% Dimming <input type="checkbox"/> <b>1 DD</b> 0-10% Dimming Dim to Dark <input type="checkbox"/> <b>eL</b> eldoLED Solo 0.1% <input type="checkbox"/> <b>LDE1</b> Lutron Hi- Lume <input type="checkbox"/> <b>-</b> As Specified  <input type="checkbox"/> <b>U</b> Uni 120-277V <input type="checkbox"/> <b>1</b> 120V <input type="checkbox"/> <b>7</b> 277V  Please verify at the time of release if 120V or 277V is required. Although drivers are universal voltage, a specific voltage is required to determine amp draw as well as voltage specific flexes and/or plug thru as needed.

#### OPTIONS

10	11	12	13
STANDBY MODULES	MISC.	SENSOR READY	LIGHTING CONTROLS
<input type="checkbox"/> <b>EM10</b> Emergency Battery 10W <input type="checkbox"/> <b>EM12</b> Emergency Battery 12W <input type="checkbox"/> <b>NO OPTION</b> Available in modules of 4-ft. and longer.	<input type="checkbox"/> <b>WL</b> UL "Suitable for Wet Locations" labeled.  <input type="checkbox"/> <b>BABA</b> Consult factory.	<input type="checkbox"/> <b>SR</b> Sensor Ready  Required for Certain Controls, Contact Mercury Lighting	<input type="checkbox"/> <b>AU</b> Autani <input type="checkbox"/> <b>AVI</b> Avi-On <input type="checkbox"/> <b>CA</b> Casambi <input type="checkbox"/> <b>LV</b> Leviton <input type="checkbox"/> <b>LT</b> Lutron <input type="checkbox"/> <b>NL</b> nLight <input type="checkbox"/> <b>PS</b> Philips/Signify <input type="checkbox"/> <b>WA</b> Wattstopper <input type="checkbox"/> <b>CU</b> Current nx <input type="checkbox"/> <b>NO</b> No option

CUSTOM HANGING POINTS	CUSTOM PAINT COLORS
<input type="checkbox"/> As Specified	<input type="checkbox"/> As Specified

Consult Mercury Lighting for further information and other options.

Mercury should be notified if the controls are to be Wireless, Networked Lighting Controls, 0-10v Dimming, DMX, etc.

If controls aren't specified, the fixture ships 0-10V, 1% dimming, unified D/I control.

# MLD2

## DROP OR FLAT LENS SUSPENDED OR SURFACE MOUNT

### PERFORMANCE

#### PERFORMANCE - A05 LENS

Based on 4Ft. Module, 3500K, 80 CRI- Signify LV6 LED Boards.

Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	15.0	107
500	2000	18.7	107
625	2500	23.5	106
825	3300	31.5	105
950	3800	36.6	104

#### PERFORMANCE - A10 LENS

Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	14.3	112
500	2000	17.9	112
625	2500	22.5	111
825	3300	29.9	110
1000	4000	36.8	109

#### PERFORMANCE - A15 LENS

Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	13.7	117
500	2000	17.1	117
625	2500	21.5	116
825	3300	28.5	116
1025	4100	35.8	115

Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

Multiplier for other Color Temp (κ)

3000K	97%
3500K	100%
4000K	102%
5000K	103%



#### PERFORMANCE - ASYM

Based on 4Ft. Module, 3500K, 80 CRI, Special Asymmetric Lens.

Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	14.0	114
500	2000	17.2	116
625	2500	21.3	117
825	2889	26.4	125
1180	4720	41.6	113

Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

Multiplier for other Color Temp (κ)

3000K	97%
3500K	100%
4000K	102%
5000K	103%



#### PERFORMANCE - BW

Based on 4Ft. Module, 3500K, 80 CRI, Special Batwing Lens.

Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	13.5	119
500	2000	16.9	118
625	2500	21.4	117
825	3300	28.8	115
1050	4200	37.8	111
1090	4360	39.4	111

Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

Multiplier for other Color Temp (κ)

3000K	97%
3500K	100%
4000K	102%
5000K	103%








# MLD2

**DROP OR FLAT LENS**  
**SUSPENDED OR SURFACE MOUNT**

## MOUNTING

For recessed options please visit the rest of the MLD2 family.




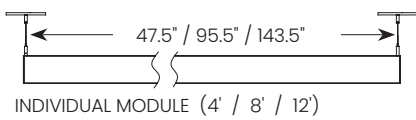
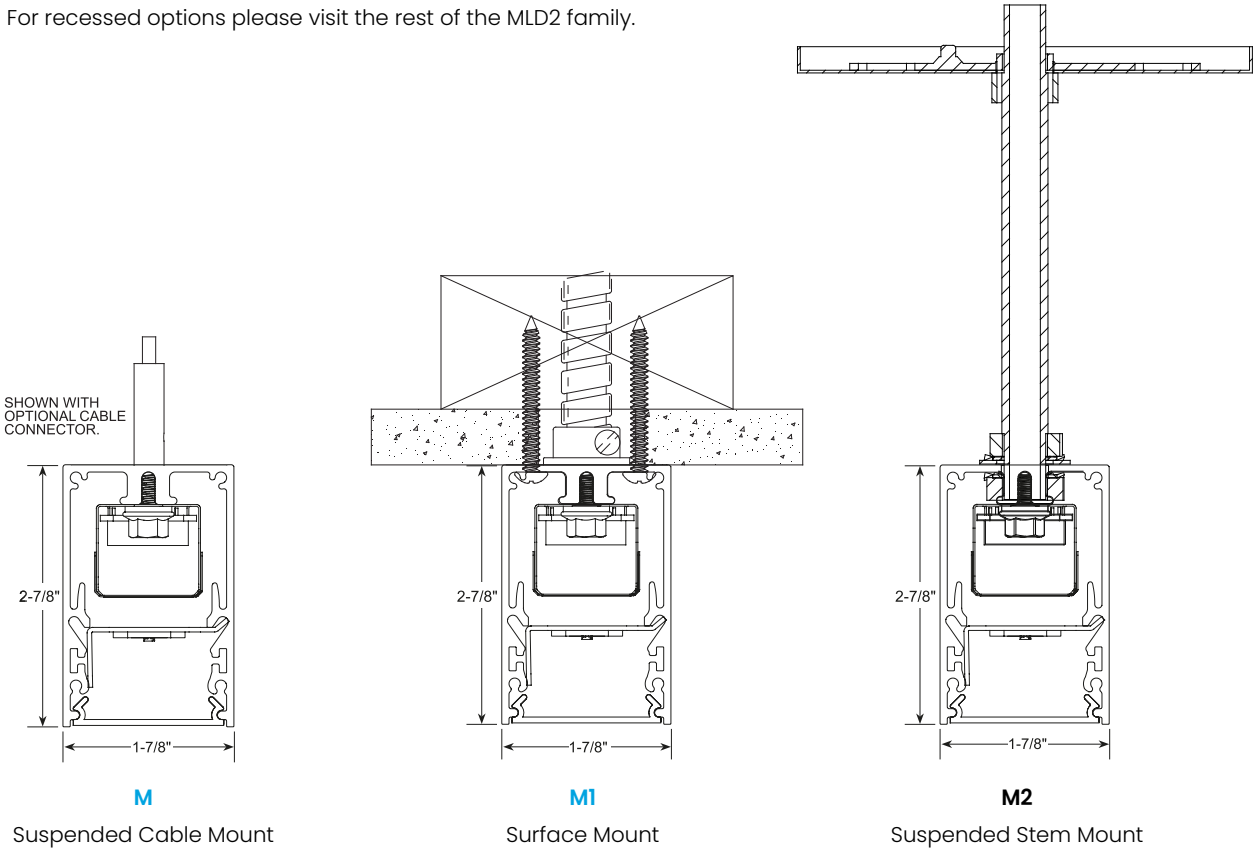


Consult factory for additional row length information.

# MLD2







DROP OR FLAT LENS  
SUSPENDED OR SURFACE MOUNT

## DIFFUSER

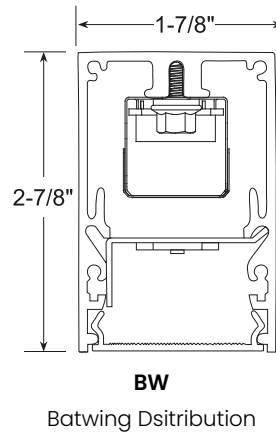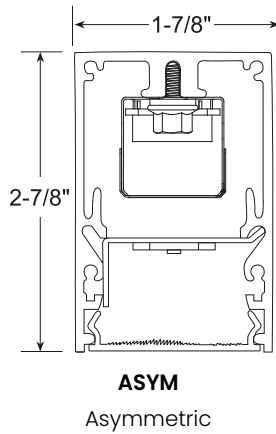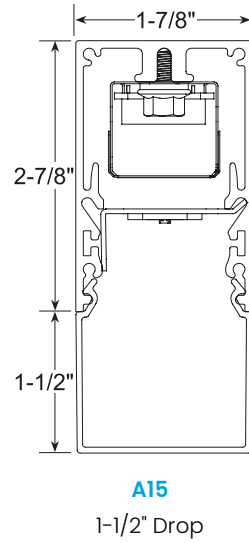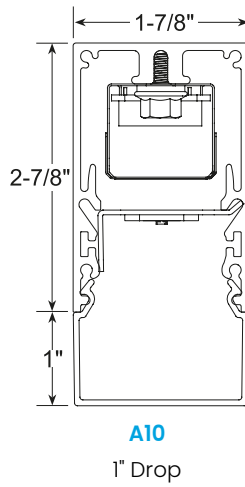
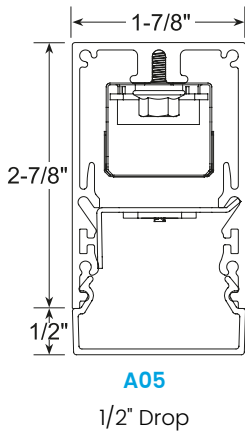


## HANGING ACCESSORIES

### CABLE SETS



### STEM SETS



PART #	DESCRIPTION
R5PF-100	Round 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
S5PF-100	Square 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
R5-100	Round 5" canopy, Hanging hardware, 100" long 1/16" cable.
R2-100	Round 2" canopy, Hanging hardware, 100" long 1/16" cable.
S5-100	Square 5" canopy, Hanging hardware, 100" long 1/16" cable.
S2-100	Square 2" canopy, Hanging hardware, 100" long 1/16" cable.
RP5-24	Round 5" canopy, Hanging hardware, 24" long 1/2" dia. stem.
SP5-24	Square 5" canopy, Hanging hardware, 24" long 1/2" dia. stem.

Other cable and stem lengths available. Consult factory.

# MLD2

## DROP OR FLAT LENS

### SUSPENDED OR SURFACE MOUNT



#### HOUSINGS

Extruded aluminum profile in a 0.080-inch wall thickness. Maximum length of each linear component is 12-ft. .060 aluminum ends are provided where needed at row termini. A one-piece 14GA galvanized steel joiner/aligner bracket is provided for each joint between housings. Internal cold-rolled steel components. Standard or custom hanging points are provided. A custom formulated non-glare matte-white polyester powder coating provides an extremely durable and long-lasting finish. Custom color finishes on request.

#### DIFFUSERS

Seamless fit diffusers. Flawless and consistent end-to-end fit. Extruded from custom formulated acrylic smooth opal material. Micro-optic technologies. Direct Batwing distribution. Allows maximum light transmission while eliminating pixilation and hot spots. Standard diffuser is ½-inch drop style. Optional diffusers; 1-inch or 1-1/2-inch drop style or flat style. Smooth finish compliments the architectural elements.

#### LED MODULES

High performance linear configured LED module boards. Each board consists of multiple mid-power, high efficacy LEDs in a precise layout eliminating the need for supplemental heat sinking. The boards produce an even and diffuse light which maximizes optical efficiency. Compatible with the dimming performance of the LED driver. Color temperatures available 80 CRI: 3000K, 3500K and 4000K. Upon request: 5000K. Color temperatures available 90 CRI: 2700K, 3000K, 3500K and 4000K.

#### TUNABLE WHITE OPTION

Field tunable range 2700K through 6500K. 80CRI.

#### LED DRIVERS

Factory programmable constant current LED power supply. Multiple standard drive current outputs (factory set by Mercury) are cataloged with their corresponding lumens per-foot offering. Upon request, custom drive current outputs and lumens-per-foot options are available. Note: Certain cataloged lumens-per-foot offerings may be provided with a non-programmable constant current LED power supply at Mercury's discretion. Contact factory if critical. Universal voltage input, 120V-277V, 50HZ-60HZ. Continuous dimming capability down to 1%-standard. 0.1% available upon request. Dim to Dark option available upon request. Sensor ready (SR) drivers compatible with most lighting controls are optional. Consult factory. Lutron driver available: LDE1 series.

#### STANDBY LIGHTING OPTIONS

Self-contained module, 10W or 12W as specified. Battery backup upon loss of power. Available in modules of 4-Ft. and longer.

#### CORNERS

Standard 90 degree corners. Custom angled corners.

#### INSTALLATIONS

Designed to be suspended on cables. Specify **M** For direct surface mounting to most ceiling types, specify **M1** and consult factory. For stem mounting specify **M2** and consult factory. Lengths of 12-ft. and less to use one housing with two ends pre-installed. Lengths over 12-ft. will be engineered to job requirements using multiple housings with one end pre installed at each row end. Lengths over 12-ft. will include appropriate job required quick-connect plug-thru wire harnesses and housing joiners. All individual modules or multiple module runs to include job required feed wire as specified. Standard or custom hanging points will be provided per job specifications.

#### CERTIFICATE OF SAFETY COMPLIANCE AND LISTINGS

Luminaire: UL and CUL listed 1598 and bears their label. Suitable for damp locations. Optional: Suitable for wet locations marking is available. Some limitations apply. Contact factory for all details.

#### LIGHTNING PROGRAM

Same quality product, shipped in 15 days or less (if drawings are required, 15 days or less starts after drawings are released). Entire order must qualify for [Lightning Program](#) in order to meet freight charges. Please contact our sales team if unsure your order will qualify. Options highlighted in Blue, 500 linear feet or less, are eligible for quick ship [Lightning Program](#). Relates to straight runs ONLY. Other variations not highlighted in blue may be available under [Lightning Program](#). Please consult factory. Specify [LP-MLD2](#) when placing order if you would like to use [Lightning Program](#).

#### WARRANTY

5-year limited warranty is standard. Special 10-year warranty available on a job-to-job basis. Complete LED warranty terms available at [www.mercltg.com](http://www.mercltg.com) Actual performance may differ as a result of end-user environment and application. Most LED luminaires are suitable to operate in ambient temperatures from -20C (-4F) to 25C (77F). The following exclusions apply: Luminaires with standby lighting option, integral lighting controls options, or wireless control options. Consult factory. LM-79 testing was measured under a controlled 25C (77F) ambient operating temperature.