



MLS1 MINI


MINI SUSPENDED

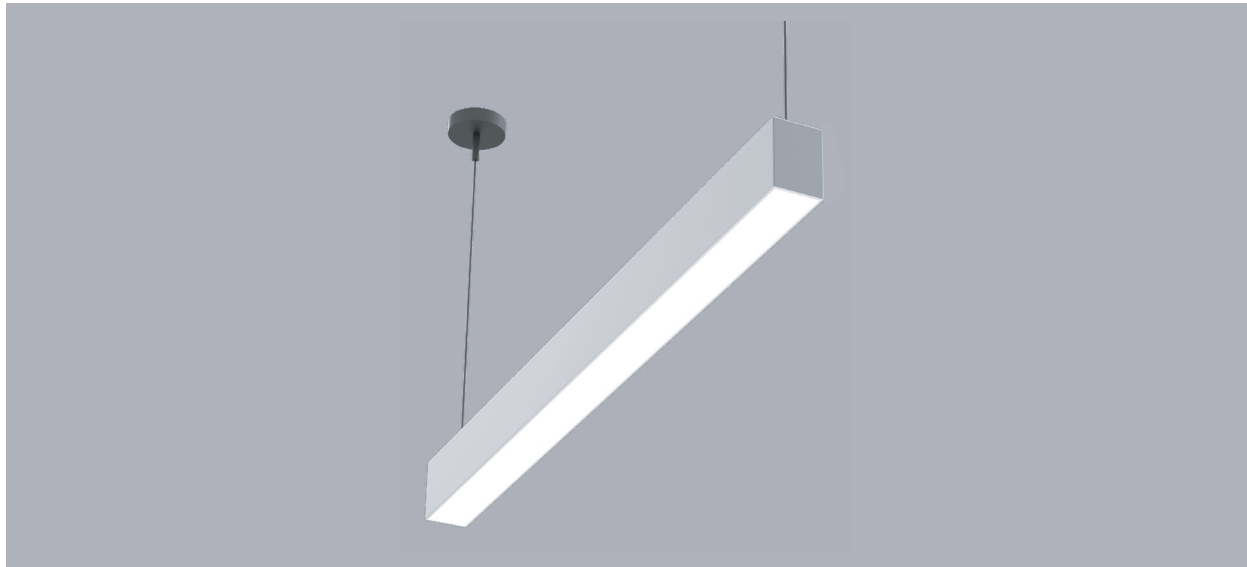


SHAPES/PATTERNS/RUNS

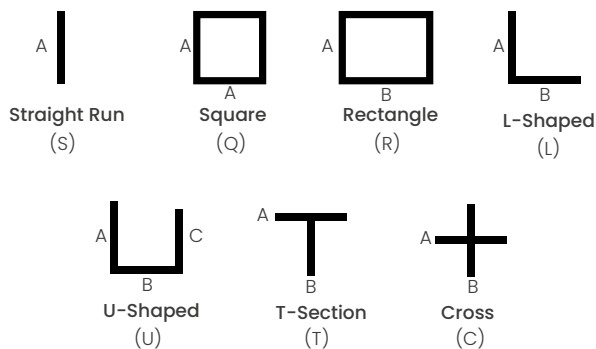

For other shapes/patterns/runs consult the factory.



Direct diffuser



Indirect diffuser (Batwing-type)

FEATURES

- The most minimalist architectural linear system available.
- Small in profile, large in performance.
- Extruded aluminum housing for perfectly straight lines of light.
- Dual directional illumination. Direct downlighting and indirect uplighting.
- Single directional options: Direct downlighting only or indirect uplighting only.
- Custom formulated high transmission smooth opal acrylic downlight lens.
- Custom designed high transmission acrylic batwing-type indirect lens.
- Linear lengths; 2-ft. and above for custom lengths and runs.
- Non-glare matte-white polyester powder coating finish.
- Custom colors available.
- Cable mount from ceiling.
- Designed to operate with remote mounted drivers.
- Cataloged standard or custom set lumensper-foot performances.
- 80 CRI standard. 90 CRI available.
- Fixture lumens per watt ratios up to 105.
- American Made.
- Lightning Program eligible (ships in 15 days or less): See ordering data for options.

Fixture type:

Job information:

PRODUCT DEFINITION SHEET

All options highlighted in **BLUE** are eligible for **Lightning Program** (same quality product, shipped in 15 days or less)

Ex: **MLS1-DI-48-S18-500-625-35K-ASO-BW-1-2C-U-EM10-BABA-SR-AU**

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16

1	2	3	4
SERIES	MOUNTING	LENGTH	SHAPE (ENTER LENGTH IN PRODUCT CODE ABOVE)
<input type="checkbox"/> MLS1 LightStreams mini <input type="checkbox"/> LP-MLS1 Lightning Program	<input type="checkbox"/> DI Direct/Indirect Suspended <input type="checkbox"/> D Direct Suspended <input type="checkbox"/> I Indirect Suspended	<input type="checkbox"/> 48 48" Length <input type="checkbox"/> 96 96" Length Custom or Row Length. 24" and above in 1" Increments. Ex. in inches: 82, 384, etc.	<input type="checkbox"/> S Individual/Straight Run Section (enter length, ex. S18) <input type="checkbox"/> Q Square Configuration (enter side length A, ex. Q18) <input type="checkbox"/> R Rectangular Configuration (enter side lengths A and B, ex. R12/24) <input type="checkbox"/> L L-Shaped Configuration (enter side lengths A and B, ex. L12/24) <input type="checkbox"/> U U-Shaped Configuration (enter side lengths A, B, and C, ex. U12/12/24) <input type="checkbox"/> T T-Section (enter side lengths A and B, ex. T12/24) <input type="checkbox"/> C Cross Configuration (enter side lengths A and B, ex. C12/24)

All corners of shape must be 90°, same plane.
 Lengths greater than 8' consist of multiple individual housing sections joined together. Lengths are nominal and may vary based on lamping and other specification selections.
 Consult Mercury when exact lengths are required.
 Consult factory for corners other than 90°

5	6	7	8	9	10
LUMENS/FT DIRECT	LUMENS/FT INDIRECT	COLOR TEMP-CCT	DIFFUSER DIRECT	DIFFUSER INDIRECT	DRIVER
ASO <input type="checkbox"/> 400 <input type="checkbox"/> 500 <input type="checkbox"/> 700	BW <input type="checkbox"/> 400 <input type="checkbox"/> 500 <input type="checkbox"/> 625 <input type="checkbox"/> 825 <input type="checkbox"/> 1150	80 CRI <input type="checkbox"/> 30K 3000K <input type="checkbox"/> 35K 3500K <input type="checkbox"/> 40K 4000K <input type="checkbox"/> 50K 5000K Upon request <input type="checkbox"/> TW Tunable White 2700K-6500K 90 CRI <input type="checkbox"/> 927K 2700K <input type="checkbox"/> 930K 3000K <input type="checkbox"/> 935K 3500K <input type="checkbox"/> 940K 4000K	<input type="checkbox"/> ASO Acrylic Smooth Opal	<input type="checkbox"/> BW Batwing Indirect	<input type="checkbox"/> 1 0-10V 1% Dimming <input type="checkbox"/> IDD 0-10% Dimming Dim to Dark <input type="checkbox"/> eL eldoLED Solo 0.1% <input type="checkbox"/> LDE1 Lutron Hi- Lume <input type="checkbox"/> - As Specified

OPTIONS

11	12	13	14	15	16
CIRCUITING	VOLTAGE	STANDBY MODULES	MISC.	SENSOR READY	LIGHTING CONTROLS
<input type="checkbox"/> 1C Direct + Indirect dim together <input type="checkbox"/> 2C Direct and Indirect controlled independently Contact Mercury for adding additional zones, separated zones/circuits, etc	<input type="checkbox"/> U Uni 120-277V <input type="checkbox"/> 1 120V <input type="checkbox"/> 7 277V Please verify at the time of release if 120V or 277V is required. Although drivers are universal voltage, a specific voltage is required to determine amp draw as well as voltage specific flexes and/or plug thrus as needed.	<input type="checkbox"/> EM10 Emergency Battery 10W <input type="checkbox"/> EM12 Emergency Battery 12W <input type="checkbox"/> NO OPTION Available in modules of 4-ft. and longer.	<input type="checkbox"/> WL UL "Suitable for Wet Locations" labeled <input type="checkbox"/> BABA Consult factory	<input type="checkbox"/> SR Sensor Ready Required for Certain Controls, Contact Mercury Lighting	<input type="checkbox"/> AU Autani <input type="checkbox"/> AVI Avi-On <input type="checkbox"/> CA Casambi <input type="checkbox"/> LV Leviton <input type="checkbox"/> LT Lutron <input type="checkbox"/> NL nLight <input type="checkbox"/> PS Philips/Signify <input type="checkbox"/> WA Wattstopper <input type="checkbox"/> CU Current nx <input type="checkbox"/> NO No option

Consult Mercury Lighting for further information and other options.

Mercury should be notified if the controls are to be Wireless, Networked Lighting Controls, 0-10v Dimming, DMX, etc.

If controls aren't specified, the fixture ships 0-10V, 1% dimming, unified D/I control.

CUSTOM HANGING POINT	CUSTOM PAINT COLORS
<input type="checkbox"/> As Specified	<input type="checkbox"/> As Specified

PERFORMANCE

ASO (DIRECT) / BW (INDIRECT)

Based on 4Ft. Module, 3500K, 80 CRI, ASO Direct Diffuser, BW Indirect Diffuser-Signify LV6 LED Boards

Direct Lumens Per Foot	Indirect Lumens Per FT	Direct/Indirect %	Delivered Lumens Total (L)	System Watts (W)	Lumens Per Watt (LPW)
400	400	50/50	3200	34.6	92
	500	45/55	3600	36.7	98
	625	40/60	4100	40.7	101
	825	35/65	4900	47.6	103
	1150	25/75	6200	59.2	105
500	400	55/45	3600	40.4	89
	500	50/50	4000	42.5	94
	625	45/55	4500	46.5	97
	825	40/60	5300	53.4	99
	1150	30/70	6600	65.0	102
700	400	65/35	4400	52.5	84
	500	60/40	4800	54.6	88
	625	55/45	5300	58.6	90
	825	45/55	6100	65.5	93
	1150	40/60	7400	77.1	96


Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

Multiplier for other Color Temp (K)

3000K	97%
3500K	100%
4000K	102%
5000K	103%



MOUNTING

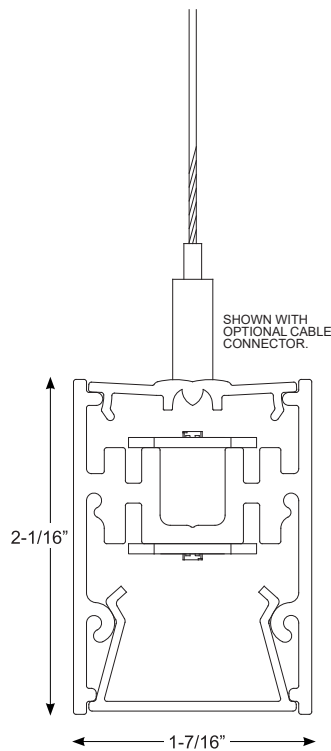


DI

Direct / Indirect Suspended

HANGING ACCESSORIES




CABLE SETS

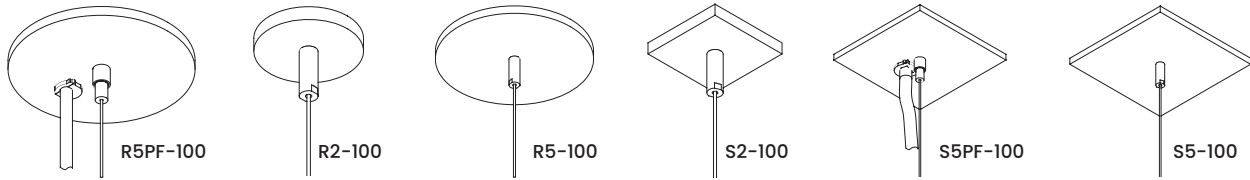

PART #	DESCRIPTION
R5PF-100	Round 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
S5PF-100	Square 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
R5-100	Round 5" canopy, Hanging hardware, 100" long 1/16" cable.
R2-100	Round 2" canopy, Hanging hardware, 100" long 1/16" cable.
S5-100	Square 5" canopy, Hanging hardware, 100" long 1/16" cable.
S2-100	Square 2" canopy, Hanging hardware, 100" long 1/16" cable.

Other cable lengths available. Consult factory.

MOUNTING



Consult factory for additional row length information

HOUSINGS

Extruded aluminum profile in a 0.080-inch wall thickness. Maximum length of each linear component is 8-ft. .060 aluminum ends are provided where needed for each row termini. An integral joiner/aligner is provided for each joint between housings. Standard hanging brackets are provided. A custom formulated non-glare matte-white polyester powder coating provides an extremely durable and long-lasting finish. Custom color finishes on request.

DIFFUSERS

Seamless fit diffusers. Flawless and consistent end-to-end fit. Standard direct diffuser: extruded from custom formulated smooth opal acrylic material. Allows maximum light transmission while eliminating pixilation and hot spots. Standard indirect diffuser: custom extruded batwing-type that spreads the light into two distinct side lobes. When projected onto the ceiling the results are a very consistent and wide spread of indirect illumination.

LED MODULES

High performance linear configured LED module boards. Each board consists of multiple mid-power, high efficacy LEDs in a precise layout eliminating the need for supplemental heat sinking. The boards produce an even and diffuse light which maximizes optical efficiency. Compatible with the dimming performance of the LED driver. Color temperatures available 80 CRI: 3000K, 3500K and 4000K. Upon request: 5000K. Color temperatures available 90 CRI: 2700K, 3000K, 3500K and 4000K.

LED REMOTE DRIVERS

All LED drivers are for remote mounting only. Remote mounting boxes available. Contractor responsible for locating and mounting above the ceiling line. All luminaires supplied with needed wiring back to remote drivers. Factory programmable constant current LED power supply. Multiple standard drive current outputs (factory set by Mercury) are cataloged with their corresponding lumens-per-foot offering. Upon request, custom drive current outputs and lumens-per-foot options are available. Universal voltage input, 120V-277V, 50HZ-60HZ. Continuous dimming capability down to 1%-standard. 0.1% available upon request. Dim to Dark option available upon request.

INSTALLATIONS

Designed to be suspended on cables. Easy-connect cable hangers make installations fast and easy. Lengths of 8-ft. and less to use one housing with two ends pre-installed. Lengths over 8-ft. will be engineered to job requirements using multiple housings with one end pre-installed at each row end. Lengths over 8-ft. will include appropriate job required housing joiners.

CERTIFICATE OF SAFETY COMPLIANCE AND LISTINGS

Luminaire: UL and CUL listed I598 and bears their label. Suitable for damp locations.

LIGHTNING PROGRAM

Same quality product, shipped in 15 days or less (if drawings are required, 15 days or less starts after drawings are released). Entire order must qualify for [Lightning Program](#) in order to meet freight charges. Please contact our sales team if unsure your order will qualify. Options highlighted in Blue, 500 linear feet or less, are eligible for quick ship [Lightning Program](#). Relates to straight runs ONLY. Other variations not highlighted in blue may be available under [Lightning Program](#). Please consult factory. Specify LP-MLS1 when placing order if you would like to use [Lightning Program](#).

WARRANTY

5-year limited warranty is standard. Special 10-year warranty available on a job-to-job basis. Complete LED warranty terms available at www.mercitg.com. Actual performance may differ as a result of end-user environment and application. Most LED luminaires are suitable to operate in ambient temperatures from -20C (-4F) to 25C (77F). The following exclusions apply: Luminaires with standby lighting option, integral lighting controls options, or wireless control options. Consult factory. LM-79 testing was measured under a controlled 25C (77F) ambient operating temperature.