





DOWNLIGHT



DIMENSIONS



MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating
 REFLECTOR: LENS

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	10W / 14W / 28W / 42W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F

ADJUSTABLE ANGLE

Tilt 17°


TYPE OF LED

COB

WARRANTY

50 000 hours at 77 °F

PHOTOMETRICS

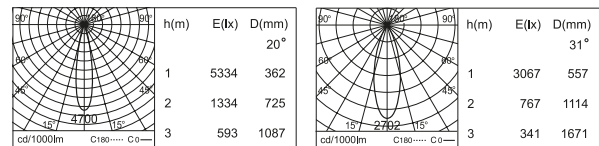

Fixture type:

Job information:

--	--

PRODUCT DEFINITION SHEET



1	2	3	4	5	6
7	8	9	10	11	



1	2	3	4	5	6
SERIES	WATTAGE	LIGHT DISTRIBUTION	HOUSING TYPE	BEAM ANGLE	LUMEN OUTPUT
<input type="checkbox"/> ALF	<input type="checkbox"/> 10W (1 Spot)	<input type="checkbox"/> DI Direct	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 20° <input type="checkbox"/> 31°	<input type="checkbox"/> 1000 lm
	<input type="checkbox"/> 14W (1 Spot)	<input type="checkbox"/> DI Direct	<input type="checkbox"/> STWF Square Trim With Flange	<input type="checkbox"/> 20° <input type="checkbox"/> 31°	<input type="checkbox"/> 1200 lm
	<input type="checkbox"/> 28W (2 Spots)	<input type="checkbox"/> DI Direct	<input type="checkbox"/> STWF Square Trim With Flange	<input type="checkbox"/> 20° <input type="checkbox"/> 31°	<input type="checkbox"/> 2400 lm
	<input type="checkbox"/> 42W (3 Spots)	<input type="checkbox"/> DI Direct	<input type="checkbox"/> STWF Square Trim With Flange	<input type="checkbox"/> 20° <input type="checkbox"/> 31°	<input type="checkbox"/> 3600 lm

7	8	9	10
FLANGE COLOR	COLOR TEMP	MOUNTING	DRIVER
<input type="checkbox"/> <input type="checkbox"/> W White	<input type="checkbox"/> 90 CRI	<input type="checkbox"/> RM Recessed mount	<input type="checkbox"/> V010 0-10V Universal Voltage Remote Driver
<input type="checkbox"/> <input type="checkbox"/> G Grey	<input type="checkbox"/> 27K		For other dimming options contact Mercury
<input type="checkbox"/> <input type="checkbox"/> B Black	<input type="checkbox"/> 30K		
	<input type="checkbox"/> 35K		
	<input type="checkbox"/> 40K		

11
VOLTAGE
<input type="checkbox"/> UNIV 120VAC-277 VAC

ANGLE OF ROTATION



Tilt adjustable 17°

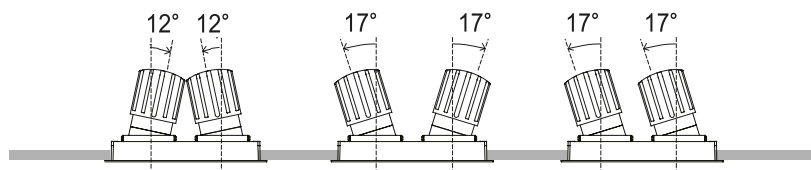


CONNECTION




- Inside the ceiling where the lighting fixture is to be installed.
- Connect the driver and luminaires via the quick connect.

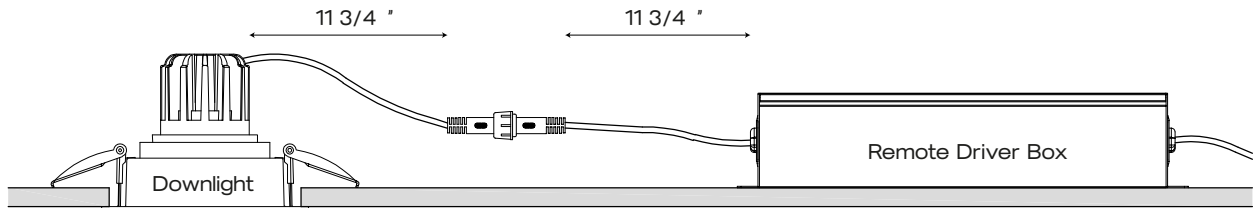

1 SPOT

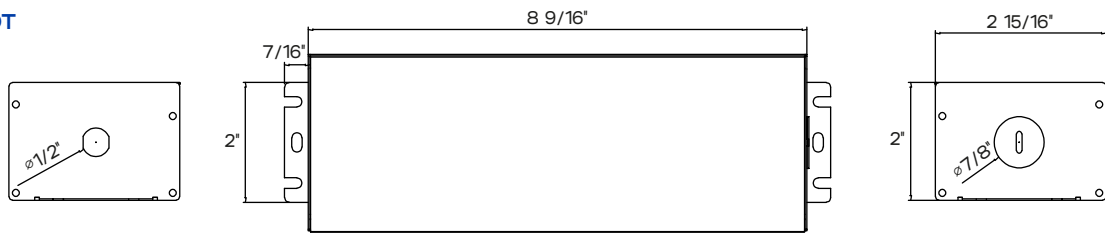

2 SPOTS

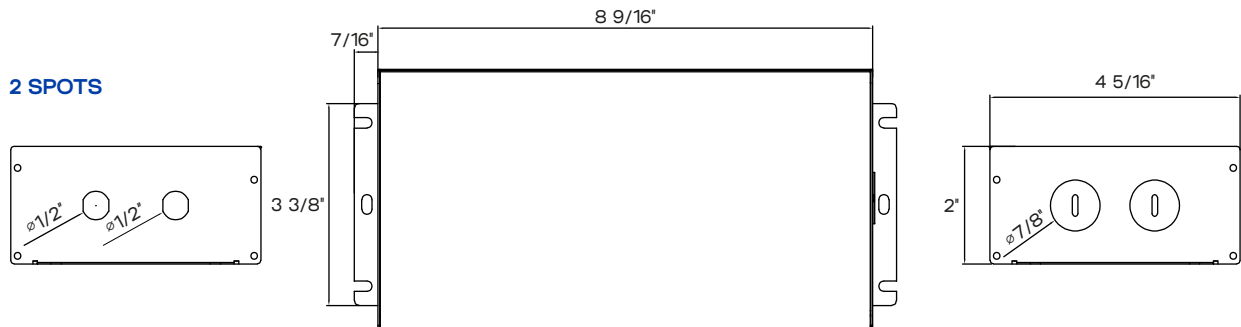

3 SPOTS

