

## DOWNLIGHT



AMB-1



AMB-2

### MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating  
REFLECTOR: PC (Vacuum Coating) / LENS (PMMA)

### STANDARD COLORS

White, Gray, Black

### SOURCE INFORMATION

WATTAGE	10W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F

### ADJUSTABLE ANGLE

Tilt 20°


### TYPE OF LED

COB

### WARRANTY

50 000 hours at 77°F


### DIMENSIONS

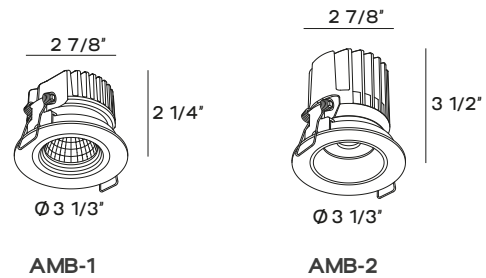

AMB-1

AMB-2

### PHOTOMETRICS

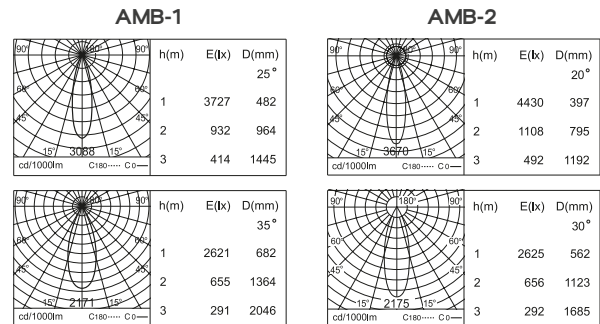

Fixture type:

Job information:

## PRODUCT DEFINITION SHEET



1	2	3	4	5	6
7	8	9	10	11	12

1	2	3	4	5	6
SERIES	WATTAGE	LIGHT DISTRIBUTION	HOUSING TYPE	BEAM ANGLE	LUMEN OUTPUT
<input type="checkbox"/> AMB-1	<input type="checkbox"/> 10W	<input type="checkbox"/> DI Direct	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 25° <input type="checkbox"/> 35°	<input type="checkbox"/> 900 lm <input type="checkbox"/> 990 lm
<input type="checkbox"/> AMB-2	<input type="checkbox"/> 10W	<input type="checkbox"/> DI Direct	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 20° <input type="checkbox"/> 30°	<input type="checkbox"/> 990 lm <input type="checkbox"/> 980 lm

7	8	9	10
FLANGE COLOR	COLOR TEMP	MOUNTING	DRIVER
<input type="checkbox"/> W White <input type="checkbox"/> G Grey <input type="checkbox"/> B Black	<input type="checkbox"/> 90 CRI <input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> RM Recessed mount	<input type="checkbox"/> V010 0-10V Universal Voltage Driver  For other dimming options contact Mercury

11	12
DRIVER LOCATION	VOLTAGE
<input type="checkbox"/> IC BOX	<input type="checkbox"/> UNIV 120VAC-277 VAC

### IC BOX

