

DOWNLIGHT



FLANGELESS TRIM



MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating
REFLECTOR: Aluminum Anodized Specular Silver

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	19W / 38W / 57W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F

ADJUSTABLE ANGLE

Tilt 20°


TYPE OF LED

COB with flange / LAMP flangeless

WARRANTY

50 000 hours at 77 °F

PHOTOMETRICS

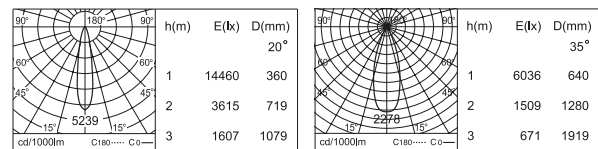

Fixture type:

Job information:

PRODUCT DEFINITION SHEET



1	2	3	4	5	6
7	8	9	10	11	



1	2	3	4	5	6
SERIES	WATTAGE	LIGHT DISTRIBUTION	HOUSING TYPE	BEAM ANGLE	LUMEN OUTPUT
<input type="checkbox"/> AST	<input type="checkbox"/> 19W (1 Spot)	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> TWF Trim With Flange <input type="checkbox"/> STWF Square Trim With Flange <input type="checkbox"/> SFLT Square Flangeless Trim	<input type="checkbox"/> 20° <input type="checkbox"/> 35°	<input type="checkbox"/> 1800 lm
	<input type="checkbox"/> 38W (2 Spots)	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> STWF Square Trim With Flange <input type="checkbox"/> SFLT Square Flangeless Trim	<input type="checkbox"/> 20° <input type="checkbox"/> 35°	<input type="checkbox"/> 3600 lm
	<input type="checkbox"/> 57W (3 Spots)	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> STWF Square Trim With Flange <input type="checkbox"/> SFLT Square Flangeless Trim	<input type="checkbox"/> 20° <input type="checkbox"/> 35°	<input type="checkbox"/> 5400 lm

7	8	9	10
FLANGE COLOR	COLOR TEMP	MOUNTING	DRIVER
<input type="checkbox"/> W White <input type="checkbox"/> G Grey <input type="checkbox"/> B Black	90 CRI <input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> RM Recessed mount	<input type="checkbox"/> V010 0-10V Universal Voltage Remote Driver For other dimming options contact Mercury

11
VOLTAGE
<input type="checkbox"/> UNIV 120VAC-277 VAC

ANGLE OF ROTATION

Tilt adjustable 20°

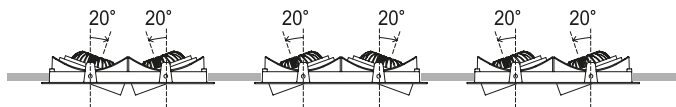


DIMENSIONS




AST-19


TRIM WITH FLANGE



SQUARE TRIM WITH FLANGE




SQUARE FLANGELESS TRIM




AST-38

SQUARE TRIM WITH FLANGE

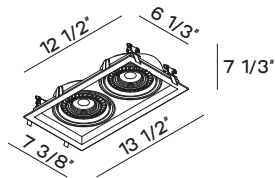


SQUARE FLANGELESS TRIM




AST-57

SQUARE TRIM WITH FLANGE

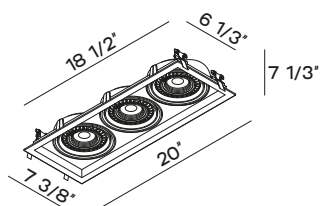


SQUARE FLANGELESS TRIM

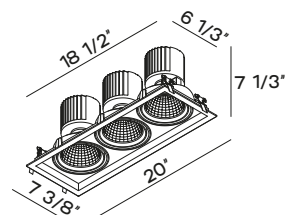


CONNECTION




- Inside the ceiling where the lighting fixture is to be installed.
- Connect the driver and luminaires via the quick connect.

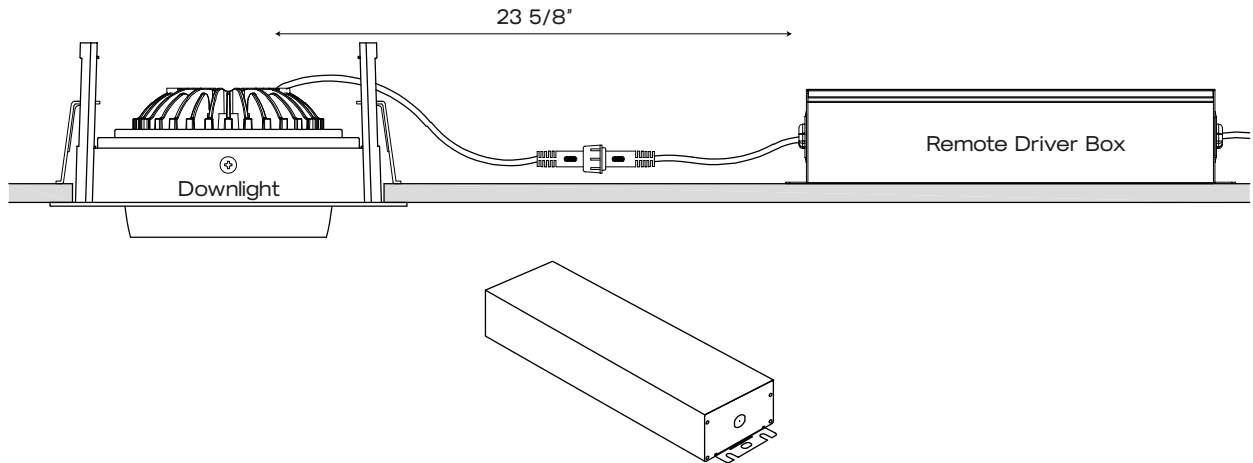

AST-19

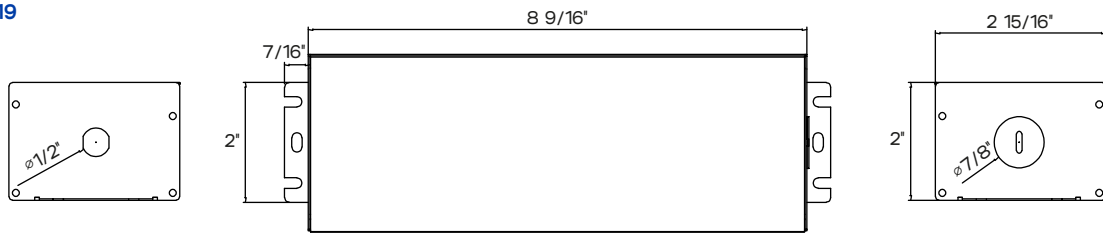

AST-38

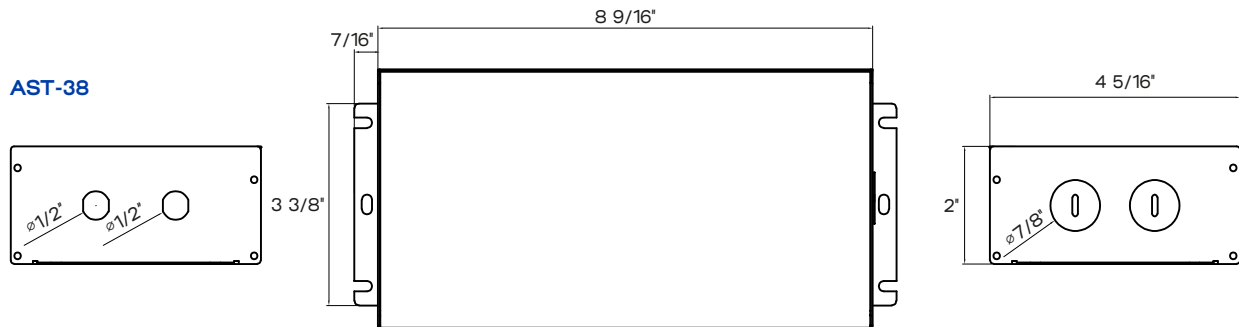

AST-57

