

## DOWNLIGHT



### MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating  
MOUNTING RING: Aluminum Extrude, Electrostatic Powder Coating

### STANDARD COLORS

White, Gray, Black

### SOURCE INFORMATION

WATTAGE	19W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F

### ADJUSTABLE ANGLE

Tilt 20°


### TYPE OF LED

COB


### WARRANTY

50 000 hours at 77 °F

### DIMENSIONS

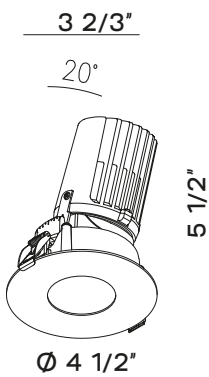

### PHOTOMETRICS

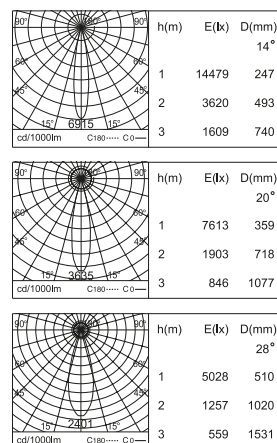

Fixture type:

Job information:

## PRODUCT DEFINITION SHEET



1	2	3	4	5	6
7	8	9	10	11	12

1	2	3	4	5	6
SERIES	WATTAGE	LIGHT DISTRIBUTION	HOUSING TYPE	BEAM ANGLE	LUMEN OUTPUT
<input type="checkbox"/> BTE	<input type="checkbox"/> 19W	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 14° <input type="checkbox"/> 20° <input type="checkbox"/> 28°	<input type="checkbox"/> 1100 lm <input type="checkbox"/> 1000 lm <input type="checkbox"/> 1200 lm

7	8	9	10
FLANGE COLOR	COLOR TEMP	MOUNTING	DRIVER
<input type="checkbox"/> <b>W</b> White <input type="checkbox"/> <b>G</b> Grey <input type="checkbox"/> <b>B</b> Black	90 CRI <input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> <b>RM</b> Recessed mount	<input type="checkbox"/> <b>V010</b> 0-10V Universal Voltage Driver For other dimming options contact Mercury

11	12
DRIVER LOCATION	VOLTAGE
<input type="checkbox"/> <b>IC BOX</b>	<input type="checkbox"/> <b>UNIV</b> 120VAC-277 VAC

### IC BOX

