


DOWNLIGHT

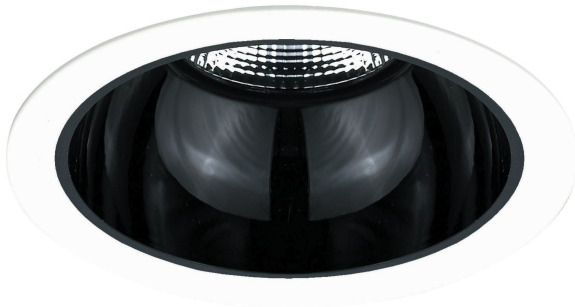

MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	14W / 18W / 23W / 25W / 27W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F

TYPE OF LED

COB




WARRANTY

50 000 hours at 77 °F



Fixture type:	Job information:
<input type="text"/>	<input type="text"/>

POTMETRICS




LNA-14-RDI-TWF

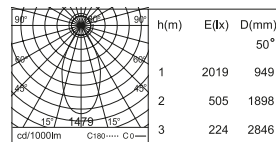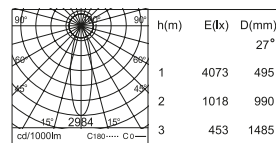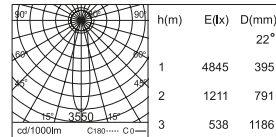



LNA-18-LDI-TWF

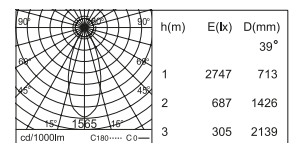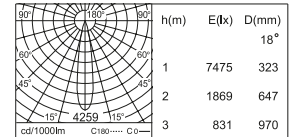




LNA-23-RDI-TWF

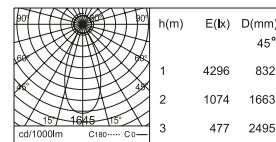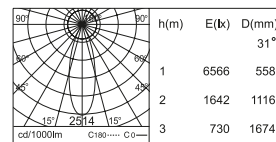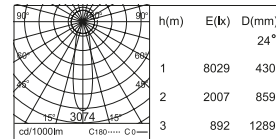




LNA-23-LDI-TWF

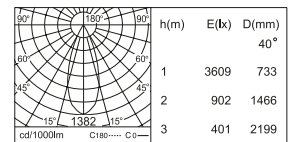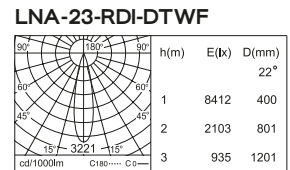

LNA-25-RDI-STWF

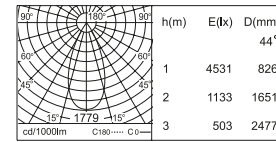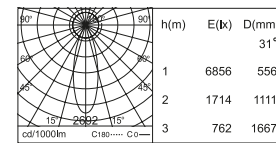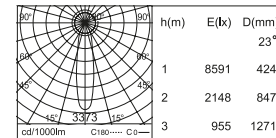

LNA-27-RDI-STWF

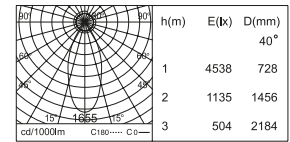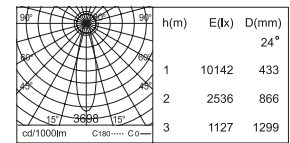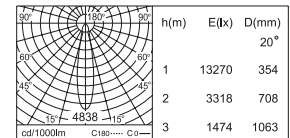

PRODUCT DEFINITION SHEET



1	2	3	4	5	6
7	8	9	10	11	

1	2	3	4	5	6
SERIES	WATTAGE	LIGHT DISTRIBUTION	HOUSING TYPE	BEAM ANGLE	LUMEN OUTPUT
<input type="checkbox"/> LNA	<input type="checkbox"/> 14W	<input type="checkbox"/> RDI Reflector Direct	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 22°	<input type="checkbox"/> 1200 lm
				<input type="checkbox"/> 27°	<input type="checkbox"/> 1200 lm
				<input type="checkbox"/> 50°	<input type="checkbox"/> 1200 lm
	<input type="checkbox"/> 18W	<input type="checkbox"/> LDI Lens Direct	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 18°	<input type="checkbox"/> 1200 lm
				<input type="checkbox"/> 39°	<input type="checkbox"/> 1300 lm
	<input type="checkbox"/> 23W	<input type="checkbox"/> LDI Lens Direct	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 22°	<input type="checkbox"/> 1800 lm
				<input type="checkbox"/> 40°	<input type="checkbox"/> 1800 lm
		<input type="checkbox"/> RDI Reflector Direct	<input type="checkbox"/> TWF Trim With Flange	<input type="checkbox"/> 24°	<input type="checkbox"/> 2200 lm
				<input type="checkbox"/> 31°	<input type="checkbox"/> 2200 lm
				<input type="checkbox"/> 45°	<input type="checkbox"/> 2200 lm
			<input type="checkbox"/> DTWF Deep Trim With Flange	<input type="checkbox"/> 22°	<input type="checkbox"/> 1800 lm
				<input type="checkbox"/> 40°	<input type="checkbox"/> 1800 lm
	<input type="checkbox"/> 25W	<input type="checkbox"/> RDI Reflector Direct	<input type="checkbox"/> STWF Square Trim With Flange	<input type="checkbox"/> 23°	<input type="checkbox"/> 2400 lm
				<input type="checkbox"/> 31°	<input type="checkbox"/> 2400 lm
				<input type="checkbox"/> 44°	<input type="checkbox"/> 2400 lm
	<input type="checkbox"/> 27W	<input type="checkbox"/> RDI Reflector Direct	<input type="checkbox"/> STWF Square Trim With Flange	<input type="checkbox"/> 20°	<input type="checkbox"/> 2500 lm
				<input type="checkbox"/> 24°	<input type="checkbox"/> 2500 lm
				<input type="checkbox"/> 40°	<input type="checkbox"/> 2300 lm

7	8	9	10
FLANGE COLOR	COLOR TEMP	MOUNTING	DRIVER
<input type="checkbox"/> W White	90 CRI	<input type="checkbox"/> RM Recessed mount	<input type="checkbox"/> V010 0-10V Universal Voltage Remote Driver
<input type="checkbox"/> G Grey	<input type="checkbox"/> 27K		For other dimming options contact Mercury
<input type="checkbox"/> B Black	<input type="checkbox"/> 30K		
	<input type="checkbox"/> 35K		
	<input type="checkbox"/> 40K		

11
VOLTAGE
<input type="checkbox"/> UNIV 120VAC-277 VAC

DIMENSIONS



LNA-14

REFLECTOR DIRECT - TRIM WITH FLANGE



LNA-18

LENS DIRECT - TRIM WITH FLANGE



LNA-23

LENS DIRECT - TRIM WITH FLANGE



LNA-23

REFLECTOR DIRECT - TRIM WITH FLANGE




LNA-23

REFLECTOR DIRECT - DEEP TRIM WITH FLANGE



LNA-25

REFLECTOR DIRECT - SQUARE TRIM WITH FLANGE

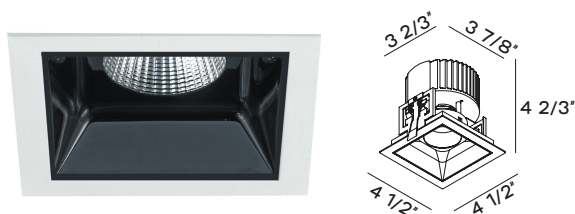

LNA-27

REFLECTOR DIRECT - SQUARE TRIM WITH FLANGE



CONNECTION



- Inside the ceiling where the lighting fixture is to be installed.
- Connect the driver and luminaires via the quick connect.

