

## DOWNLIGHT



### MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating  
REFLECTOR: ABS (Chrome) Non Glare Refelctor

### STANDARD COLORS

White, Black, White Chrome, Dark Chrome

### SOURCE INFORMATION

WATTAGE	11W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F

### ADJUSTABLE ANGLE

Tilt 30°


### TYPE OF LED

COB



### WARRANTY

50 000 hours at 77 °F

### DIMENSIONS



### PHOTOMETRICS

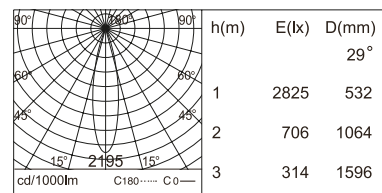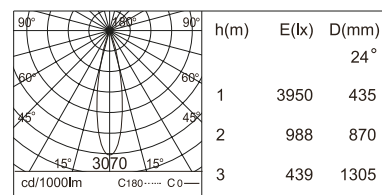

Fixture type:

Job information:

--	--

## PRODUCT DEFINITION SHEET



1	2	3	4	5	6
7	8	9	10	11	

1	2	3	4	5	6
SERIES	WATTAGE	LIGHT DISTRIBUTION	HOUSING TYPE	BEAM ANGLE	LUMEN OUTPUT
<input type="checkbox"/> LYR	<input type="checkbox"/> 11W	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> FLT Flangeless Trim	<input type="checkbox"/> 24°	<input type="checkbox"/> 980 lm
				<input type="checkbox"/> 29°	<input type="checkbox"/> 960 lm

7	8	9
FLANGE COLOR	COLOR TEMP	MOUNTING
<input type="checkbox"/> <input type="checkbox"/> W White	90 CRI	<input type="checkbox"/> RM Recessed mount
<input type="checkbox"/> <input checked="" type="checkbox"/> B Black	<input type="checkbox"/> 27K	
<input type="checkbox"/> <input checked="" type="checkbox"/> WC White Chrome	<input type="checkbox"/> 30K	
<input type="checkbox"/> <input checked="" type="checkbox"/> DC Dark Chrome	<input type="checkbox"/> 35K	
	<input type="checkbox"/> 40K	

10	11
DRIVER	VOLTAGE
<input type="checkbox"/> V010 0-10V Universal Voltage Remote Driver	<input type="checkbox"/> UNIV 120VAC-277 VAC

For other dimming options contact Mercury

## CONNECTION



- Inside the ceiling where the lighting fixture is to be installed.
- Connect the driver and luminaires via the quick connect.

