

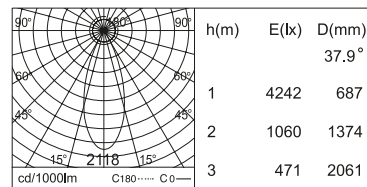


DOWNLIGHT

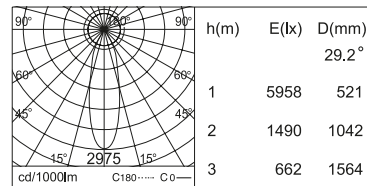

PHOTOMETRICS

19W/38W

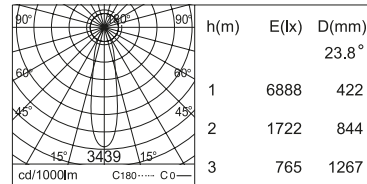

MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating
REFLECTOR: PC

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	19W / 38W / 25W / 50W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F




TYPE OF LED

COB

WARRANTY

50 000 hours at 77 °F

25W/50W

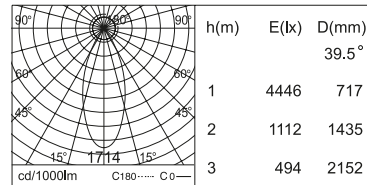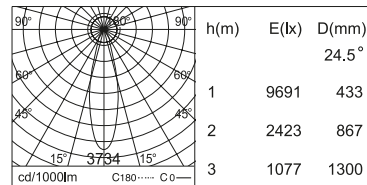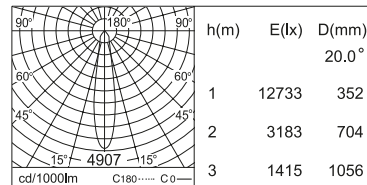

Fixture type:

Job information:

--	--

PRODUCT DEFINITION SHEET



1	2	3	4	5	6
7	8	9	10	11	12

1	2	3	4	5	6	7
SERIES	APERTURE	WATTAGE	LIGHT DISTRIBUTION	HOUSING TYPE	BEAM ANGLE	LUMEN OUTPUT
<input type="checkbox"/> NVA	<input type="checkbox"/> 3	<input type="checkbox"/> 19W (1 spot)	<input type="checkbox"/> DI Direct	<input type="checkbox"/> S Square	<input type="checkbox"/> 23°	<input type="checkbox"/> 1900 lm
					<input type="checkbox"/> 29°	<input type="checkbox"/> 1900 lm
					<input type="checkbox"/> 37°	<input type="checkbox"/> 1850 lm
		<input type="checkbox"/> 38W (2 spot)	<input type="checkbox"/> DI Direct	<input type="checkbox"/> R Rectangular	<input type="checkbox"/> 20°	<input type="checkbox"/> 3800 lm
					<input type="checkbox"/> 24°	<input type="checkbox"/> 3800 lm
					<input type="checkbox"/> 39°	<input type="checkbox"/> 3700 lm
	<input type="checkbox"/> 4	<input type="checkbox"/> 25W (1 spot)	<input type="checkbox"/> DI Direct	<input type="checkbox"/> S Square	<input type="checkbox"/> 20°	<input type="checkbox"/> 2400 lm
					<input type="checkbox"/> 24°	<input type="checkbox"/> 2400 lm
					<input type="checkbox"/> 39°	<input type="checkbox"/> 2200 lm
		<input type="checkbox"/> 50W (2 spot)	<input type="checkbox"/> DI Direct	<input type="checkbox"/> R Rectangular	<input type="checkbox"/> 20°	<input type="checkbox"/> 4800 lm
					<input type="checkbox"/> 24°	<input type="checkbox"/> 4800 lm
					<input type="checkbox"/> 39°	<input type="checkbox"/> 4400 lm


8	9	10	11
FLANGE COLOR	COLOR TEMP	MOUNTING	DRIVER
<input type="checkbox"/> <input type="checkbox"/> W White	90 CRI	<input type="checkbox"/> SM Surface Mount	<input type="checkbox"/> V010 0-10V Universal Voltage Integral Driver
<input type="checkbox"/> <input type="checkbox"/> G Grey	<input type="checkbox"/> 27K		For other dimming options contact Mercury
<input type="checkbox"/> <input type="checkbox"/> B Black	<input type="checkbox"/> 30K		
	<input type="checkbox"/> 35K		
	<input type="checkbox"/> 40K		

12
VOLTAGE
<input type="checkbox"/> UNIV 120VAC-277 VAC


DIMENSIONS




NVA-19




NVA-38



NVA-25




NVA-50




CONNECTION



- Inside the ceiling where the lighting fixture is to be installed.
- Connect the driver and luminaires via the quick connect.

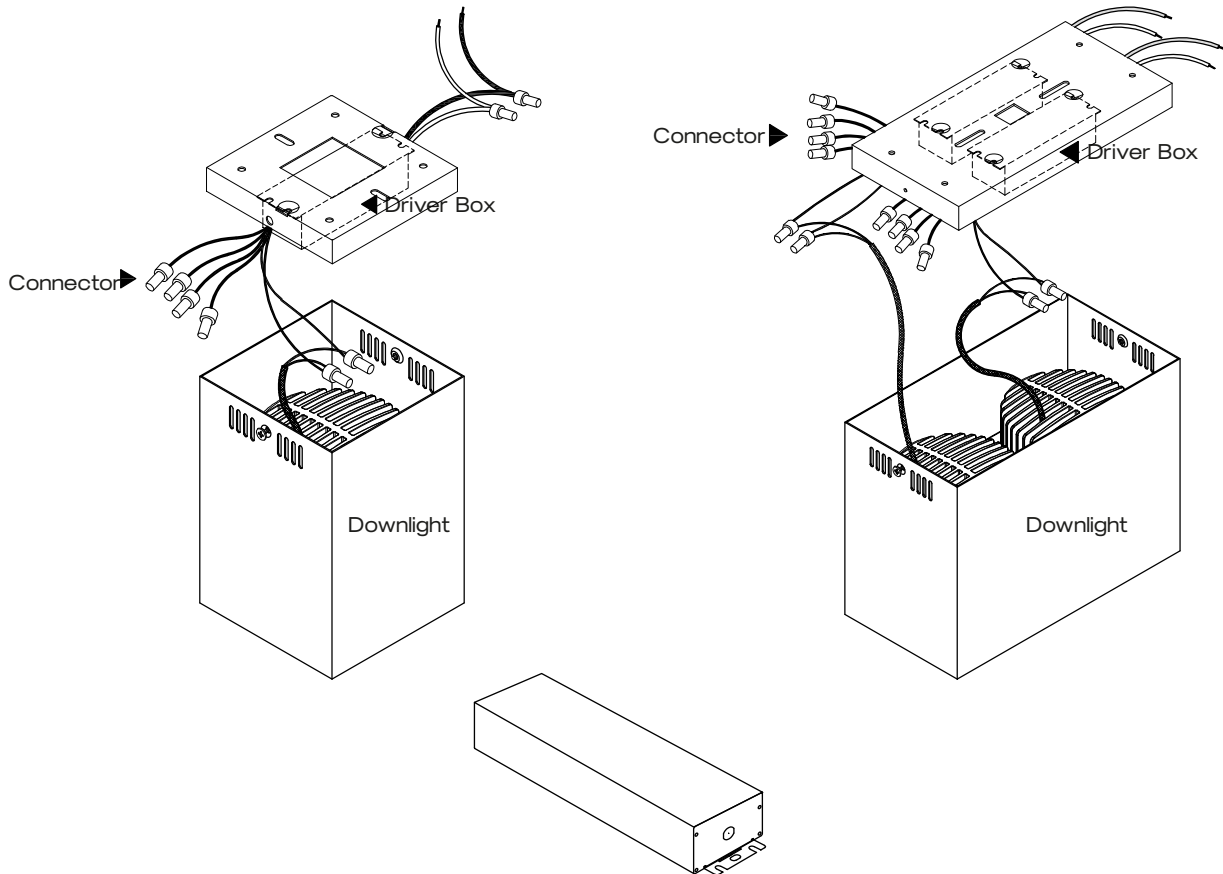

1 SPOT

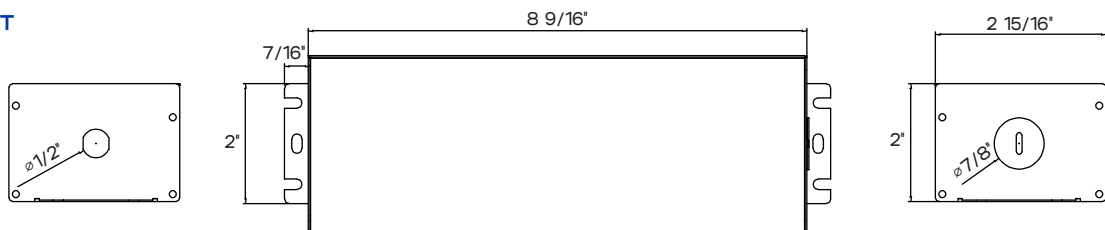

2 SPOTS

