

DOWNLIGHT



MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating
 REFLECTOR: Aluminum Anodized Specular Silver

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	28W / 56W / 84W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F

ADJUSTABLE ANGLE

Tilt 90°
 Rotation 355°




TYPE OF LED

COB

WARRANTY

50 000 hours at 77 °F

PHOTOMETRICS

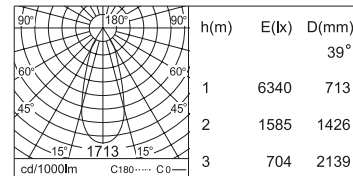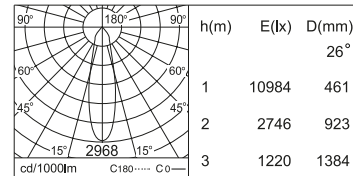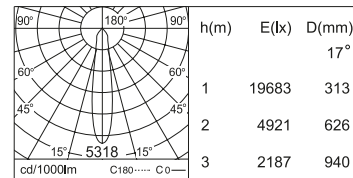

Fixture type:

Job information:

--	--

PRODUCT DEFINITION SHEET



1	2	3	4	5	6
7	8	9	10	11	

1	2	3	4	5	6
SERIES	WATTAGE	LIGHT DISTRIBUTION	HOUSING TYPE	BEAM ANGLE	LUMEN OUTPUT
<input type="checkbox"/> VEG	<input type="checkbox"/> 28W (1 Spot)	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> STWF Square Trim With Flange	<input type="checkbox"/> 17°	<input type="checkbox"/> 3000 lm
	<input type="checkbox"/> 56W (2 Spots)	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> STWF Square Trim With Flange	<input type="checkbox"/> 26°	<input type="checkbox"/> 6000 lm
	<input type="checkbox"/> 84W (3 Spots)	<input type="checkbox"/> AD Adjustable	<input type="checkbox"/> STWF Square Trim With Flange	<input type="checkbox"/> 39°	<input type="checkbox"/> 9000 lm


7	8	9	10
FLANGE COLOR	COLOR TEMP	MOUNTING	DRIVER
<input type="checkbox"/> <input type="checkbox"/> W White	90 CRI	<input type="checkbox"/> RM Recessed mount	<input type="checkbox"/> V010 0-10V Universal Voltage Remote Driver
<input type="checkbox"/> <input type="checkbox"/> G Grey	<input type="checkbox"/> 27K		For other dimming options contact Mercury
<input type="checkbox"/> <input type="checkbox"/> B Black	<input type="checkbox"/> 30K		
	<input type="checkbox"/> 35K		
	<input type="checkbox"/> 40K		

11
VOLTAGE
<input type="checkbox"/> UNIV 120VAC-277 VAC


DIMENSIONS




VEG-28



VEG-56

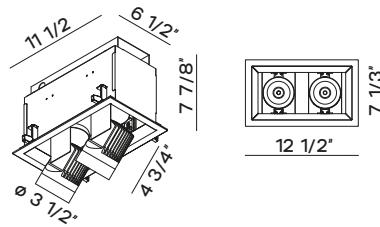


VEG-84

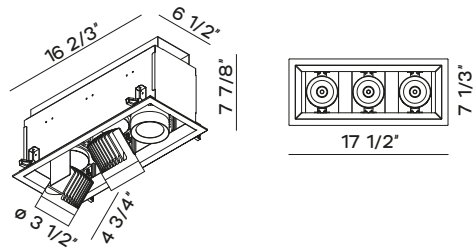


ANGLE OF ROTATION





Basic step



1st step




2st step




REMOTE DRIVER




- Inside the ceiling where the lighting fixture is to be installed.
- Connect the driver and luminaires via the quick connect.

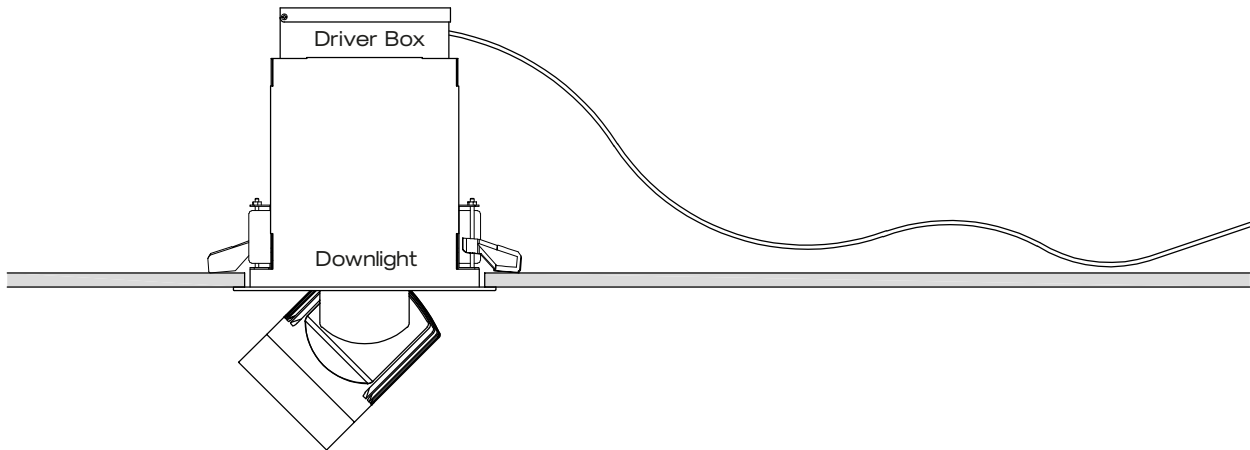

VEG-28

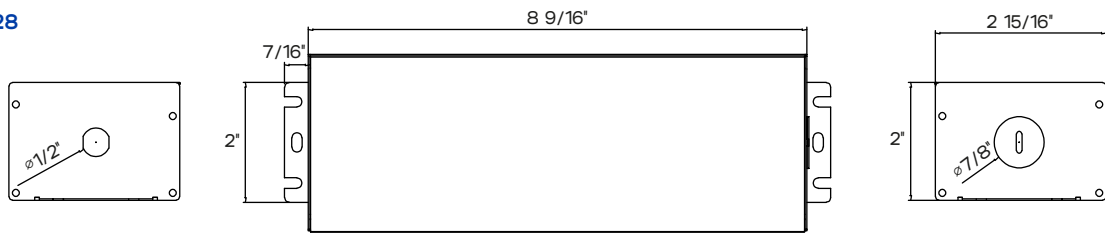

VEG-56

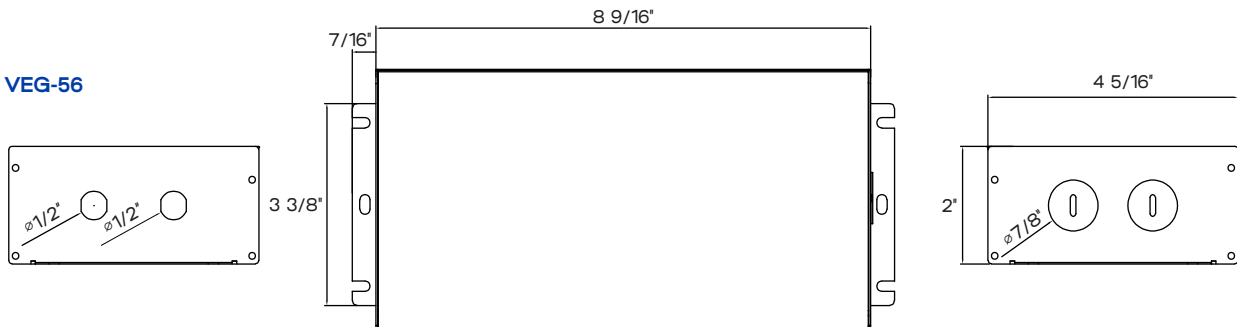

VEG-84

