


LR302 SERIES

ARCHITECTURAL RECESSED

2X4 LED VOLUME LUMINAIRE ULTRA-SHALLOW DESIGN

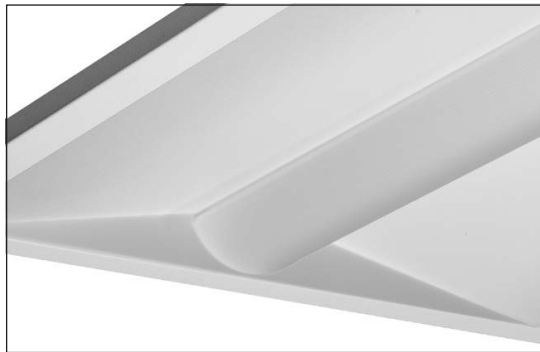

Detail

FEATURES

- Ultra-shallow recessed 2X4 ambient LED luminaire featuring a single linear high transmission acrylic diffuser.
- Architecturally-curved diffuser envelopes the LED light source allowing maximum light transmission while eliminating pixelations and hot spots.
- Delivers a balanced amount of horizontal and vertical illumination.
- Digital LED technology provides high efficacy and energy efficiency.
- Multiple power and light levels are offered as standard to allow meeting design and energy needs per application. Custom factory set levels available on request.
- Lumen maintenance; Reported L70 (hours) & L80 (hours) > 60,000.
- CRI greater than 80.
- Fixture lumens per watt ratios up to 141.
- Optional heat removal feature allows ambient room air/heat to be vented to plenum.
- American Made.



Fixture type:	Job information:
<input type="text"/>	<input type="text"/>

LUMEN PACKAGE

MODULE SIZE 2x4

Nominal Lumen Package	Color	Fixture Power (W)	Delivered Lumens	Fixture LPW	IC Rated	Standby Lighting Option
2600	3000K	19	2518	133	✓	✓
2600	3500K	19	2601	137	✓	✓
2600	4000K	19	2625	138	✓	✓
2600	5000K	19	2625	138	✓	✓
3200	3000K	23	3104	135	✓	✓
3200	3500K	23	3207	139	✓	✓
3200	4000K	23	3237	141	✓	✓
3200	5000K	23	3237	141	✓	✓
3700	3000K	27	3565	132	✓	✓
3700	3500K	27	3684	136	✓	✓
3700	4000K	27	3717	138	✓	✓
3700	5000K	27	3717	138	✓	✓
4000	3000K	29	3850	133	✓	✓
4000	3500K	29	3978	137	✓	✓
4000	4000K	29	4015	138	✓	✓
4000	5000K	29	4015	138	✓	✓
4600	3000K	35	4469	128	✓	✓
4600	3500K	35	4616	132	✓	✓
4600	4000K	35	4659	133	✓	✓
4600	5000K	35	4659	133	✓	✓
5000	3000K	38	4857	128	✓	✓
5000	3500K	38	5018	132	✓	✓
5000	4000K	38	5064	133	✓	✓
5000	5000K	38	5064	133	✓	✓
5700	3000K	44	5512	125	✓	✓
5700	3500K	44	5695	129	✓	✓
5700	4000K	44	5747	131	✓	✓
5700	5000K	44	5747	131	✓	✓
7800	3000K	58	7546	130	✓	✓
7800	3500K	58	7740	133	✓	✓
7800	4000K	58	7872	136	✓	✓
7800	5000K	58	7872	136	✓	✓
10,400	3000K	84	10,108	120	-	-
10,400	3500K	84	10,368	123	-	-
10,400	4000K	84	10,544	126	-	-
10,400	5000K	84	10,768	128	-	-
14,200	3000K	110	13,710	125	-	-
14,200	3500K	110	14,044	128	-	-
14,200	4000K	110	14,242	129	-	-
14,200	5000K	110	14,584	133	-	-

Actual wattage may differ by +/- 5% when operating between 120-277V +/- 10%

LR302 SERIES

ARCHITECTURAL RECESSED
2X4 LED VOLUME LUMINAIRE ULTRA-SHALLOW DESIGN





PRODUCT DEFINITION SHEET

Ex: LR302-24G-5700-35K-1%-UNI-EM10



1	2	3	4	5
SERIES	NOMINAL LENGTH (FT)	NOMINAL LUMENS	COLOR TEMP	DRIVER
<input type="checkbox"/> LR302	<input type="checkbox"/> 24G 2X4 Module/ Nema Type G/Lay-In Grid, 1" or 9/16" Fine Line.	<input type="checkbox"/> 2600 <input type="checkbox"/> 5000 <input type="checkbox"/> 3200 <input type="checkbox"/> 5700 <input type="checkbox"/> 3700 <input type="checkbox"/> 7800 <input type="checkbox"/> 4000 <input type="checkbox"/> 10,400 <input type="checkbox"/> 4600 <input type="checkbox"/> 14,200 Custom Lumen Package Contact Factory	<input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K <input type="checkbox"/> 50K Upon Request	<input type="checkbox"/> 1% 0-10V 1% Dimming <input type="checkbox"/> - As specified
6	7	8		
VOLTAGE	STANDBY MODULES	OPTIONS		
<input type="checkbox"/> UNI 120 VAC-277 VAC	<input type="checkbox"/> EM10 <input type="checkbox"/> EM12	<input type="checkbox"/> FLX 6Ft. Single Circuit Power Flex (Specify Voltage) <input type="checkbox"/> FLX2 6Ft. 2-Circuit Power Flex (Specify Voltage) <input type="checkbox"/> WL UL "Suitable for Wet Locations" labeled. <input type="checkbox"/> HR Heat Removal Housing		

CROSS SECTIONS

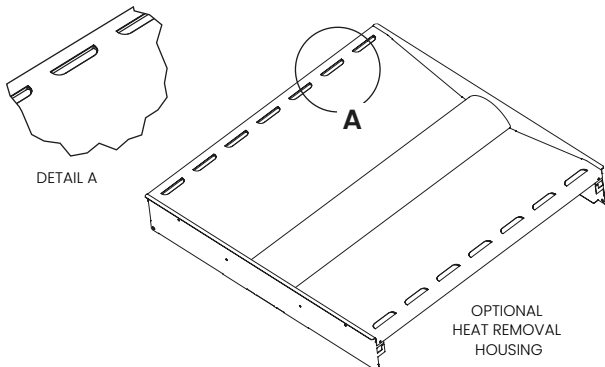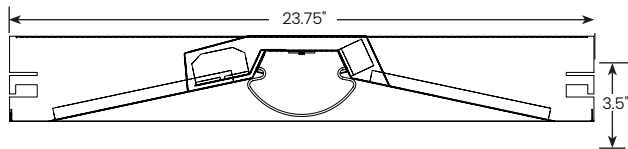

LR302 SERIES

ARCHITECTURAL RECESSED

2X4 LED VOLUME LUMINAIRE ULTRA-SHALLOW DESIGN



LED MODULES

- High performance linear configured LED module boards.
- Each board consists of multiple mid-power, high efficacy LEDs in a precise layout eliminating the need for supplemental heat sinking.
- The boards produce an even and diffuse light which maximizes optical efficiency.
- Compatible with the dimming performance of the LED driver.
- Color temperatures available: 3000K, 3500K and 4000K.
- Upon request: 5000K.

LED DRIVERS

- Factory programmable constant current LED power supply.
- Multiple standard drive current outputs (factory set by Mercury) are cataloged with their corresponding lumen package offerings. Upon request, custom drive current outputs and lumen packages are available.
- Note: Certain cataloged lumen packages may be provided with a non-programmable constant current LED power supply at Mercury's discretion. Contact factory if critical.
- Universal voltage input, 120V-277V, 50HZ-60HZ.
- Specification grade dimming down to 1% on 0-10V dimming controls.

LED LUMEN PACKAGES

- Cataloged standard lumen packages. See attached chart for full details.
- Custom lumen packages pre-set are optional with programmable drivers only. Contact factory for details.

HOUSING

- All metal parts are fabricated in a computercontrolled operation from heavy gauge code grade cold rolled steel.
- Rivets and/or spot welds hold all parts for strength and unity.
- A custom formulated non-glare white powder coating is applied to the housing after fabrication providing a reflectivity of at least 90%.

DIFFUSERS

- Architecturally-curved profile design.
- Extruded from custom formulated high transmission acrylic material.
- Linear ribbing for high LED performance.

STANDBY LIGHTING BATTERY BACKUP:

- Self contained module, 5W, 10W or 12W as specified. Battery backup upon loss of power.
- May not be available with some higher lumen packages. See Lumen package matrix.

INSTALLATIONS

- Designed for installation into NEMA Type G lay-in acoustical grid ceiling systems, 1" grid or 9/16" fine-line grid.
- For NEMA Type F dry wall applications an additional flange kit must be used with Type G housing.
- Four pry-out style grid support clips are located on the housing sides.
- Four auxiliary suspension points are also provided for securing to building structure.
- A quick wiring access plate is located on back of the housing. Additional knockouts provided.
- Factory installed power whips as specified.

CERTIFICATE OF SAFETY COMPLIANCE AND LISTINGS

- Luminaire: UL and CUL listed 1598 and bears their label. Suitable for damp locations.
- Optional: Suitable for wet locations marking is available. Contact factory for all details.
- IC rated. (Some higher lumen packages may

WARRANTY

- 5-year limited warranty is standard. Special 10-year warranty available on a job-to-job basis. Complete LED warranty terms available at www.mercltg.com
- Actual performance may differ as a result of end-user environment and application.
- Most LED luminaires are suitable to operate in ambient temperatures from -20C (-4F) to 25C (77F).
- The following exclusions apply: Luminaires with standby lighting option, integral lighting controls options, or wireless control options. Consult factory.
- LM-79 testing was measured under a controlled 25C (77F) ambient operating temperature.

PHOTOMETRICS

- All photometrics reports are available at www.mercltg.com