


LIGHTSTREAMS

MLS4-G SERIES


Recessed Mount for 4"- OC Grid Ceilings

Architectural Linear LED Illuminating System | LIGHTSTREAMS 2

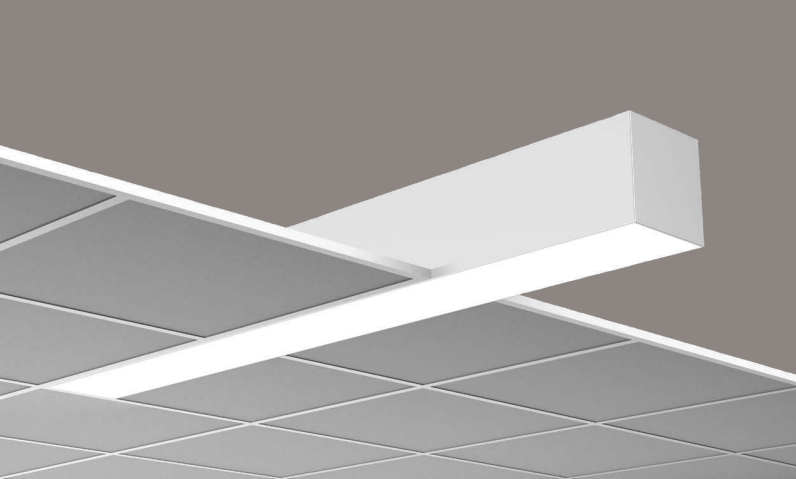

Features

- Extruded aluminum housing for perfectly straight lines of light.
- Narrow profile fits 4-inch on-center grid ceilings.
- Linear lengths; 2-ft. and above in increments of one-inch.
- Custom formulated high diffusion extruded acrylic lens.
- Non-glare matte-white polyester powder coating finish.
- Continuous dimming capability down to 1% on 0-10V controls.
- Compatible with various grid ceiling types.
- Cataloged standard or custom set lumens-per-foot performances.
- 80 CRI standard. 90 CRI available.
- IC Rated.
- CCEA option available.
- Fixture lumens per watt ratios up to 118.
- Tunable white feature optional.
- Lighting controls and sensors.
- American Made.

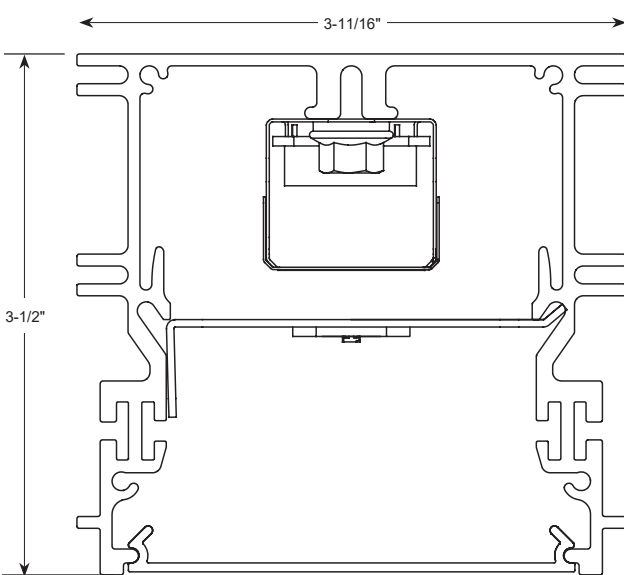

Performance- HTA

Based on 4ft. Module, 3500K, 80 CRI, HTA diffuser

Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	13.6	118
500	2000	17.1	117
625	2500	21.6	116
825	3300	29.3	113
950	3800	34.5	110
1120	4480	41.7	107

Multiplier for other Color Temp (K)

3000K	97%
3500K	100%
4000K	102%
5000K	103%



Actual performance may differ by +/- 5% when operating between 120V-277+/- 10%. Consult factory for 90 CRI performances.

Performance- ASO

Based on 4ft. Module, 3500K, 80 CRI, ASO diffuser


Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	16.9	95
500	2000	21.3	94
625	2500	27.3	92
900	3600	41.4	87

Multiplier for other Color Temp (K)

3000K	97%
3500K	100%
4000K	102%
5000K	103%



Actual performance may differ by +/- 5% when operating between 120V-277+/- 10%. Consult factory for 90 CRI performances.



Fixture Type:

Job Information:



MLS4-G Series | LIGHTSTREAMS 4

Architectural Linear LED Illuminating System | Recessed Mount for Grid Ceilings

Ex. **MLS4-G-144-900-35K-ASO-1%-U-EM12-S5**

Options

SERIES	MOUNTING	MODULE OR ROW LENGTH	LUMENS/ FT	COLOR TEMP	DIFFUSER	DRIVER	VOLTAGE	STANDBY MODULES*	LIGHTING CONTROLS	MISC.
MLS4 LightStreams 4	G Grid 15/16"	48 48" Length	400 500 625	30K 35K 40K 50K Upon Request	HTA High Transmission Acrylic	1% 0-10V 1% Dimming	U Uni 120V-277V	EM7 EM10 EM12	S1 Philips EasySense	CCEA Meets the City of Chicago Environmental Air specifications.
	G9 Grid 9/16"	96 96" Length	825 950 1120							
	S Screw Slot or Interlude Grid 9/16"	144 144" Length	400 500 625 900	80 CRI	ASO Acrylic Smooth Opal (Performance is reduced with this diffuser)	SR Sensor Ready (Required for Certain Controls, Contact Factory)	1 120V	No Option	S2 Magnum M9 (Dali)	S5 Enlighted (C2-D2)
	T Grid 15/16" Tegular Tile	Custom or Row Length. 24" and above in 1" increments. Ex. in inches: 82, 384, etc.	927K 930K 935K 940K							
	T9 Grid 9/16" Tegular Tile		Custom Lumen Packages.	90 CRI		LDE1 Lutron Hi-Lume	7 277V		O8 Sensor Switch (SFR7)	
						As Specified	X As Specified		O10 WattStopper (FS355)	
									No Option	

*Available in modules of 4-ft. and longer. / Maximum 625 Lumens per foot packages.

Housings

Extruded aluminum profile in a 0.080-inch wall thickness. Maximum length of each linear component is 12-ft.

.060 aluminum ends are provided where needed at row termini.

A one-piece 14GA galvanized steel joiner/aligner bracket is provided for each joint between housings.

Internal cold-rolled steel components.

A custom formulated non-glare matte-white polyester powder coating provides an extremely durable and long lasting finish.

Easy-use grid pry outs provided.

Housing intended for recessing grid type ceiling system.

Diffusers

Seamless fit diffusers. Flawless and consistent end-to-end fit.

HTA diffuser: extruded from custom formulated high transmission white acrylic material. Specify when the highest performance levels are required.

ASO diffuser: extruded from custom formulated smooth opal acrylic material. Specify when a more esthetically white appearance is desired.

Allows maximum light transmission while eliminating pixilation and hot spots

Smooth finish compliments the architectural elements.

LED Modules

High performance linear configured LED module boards. Each board consists of multiple mid-power, high efficacy LEDs in a precise layout eliminating the need for supplemental heat sinking.

The boards produce an even and diffuse light which maximizes optical efficiency.

Color temperatures available 80 CRI: 3000K, 3500K and 4000K. Upon request: 5000K.

Color temperatures available 90 CRI: 2700K, 3000K, 3500K and 4000K.

Tunable White Option

Field tunable range 2700K through 6500K. 80CRI.

Integral Lighting Controls

Various lighting controls and sensors are optional. Consult factory.

LED Drivers

Factory programmable constant current LED power supply.

Multiple standard drive current outputs (factory set by Mercury) are cataloged with their corresponding lumens-per-foot offering. Upon request, custom drive current outputs and lumens-per-foot options are available.

Note: Certain cataloged lumens-per-foot offerings may be provided with a non-programmable constant current LED power supply at Mercury's discretion. Contact factory if critical.

Universal voltage input, 120V-277V, 50HZ-60HZ.

Specification grade continuous dimming capability down to 1% on 0-10V dimming controls.

Sensor ready (SR) drivers compatible with most lighting controls are optional. Consult factory.

Lutron driver available: LDE1 series. (Limited to 625 Lumens per foot packages).

Standby Lighting Options

Self contained module, 7W, 10W or 12W as specified. Battery backup upon loss of power. Available in modules of 4-ft. and longer. **(Limited to 825 Lumens per foot packages).**

Installations

Designed for recessed installation into acoustical grid ceiling systems, including Armstrong® 4" TechZone™. See ceiling types section. Availability for various types; 15/16" grid, 9/16" grid, 9/16" screw-slot, 9/16" interlude, 15/16" tegular, 9/16" tegular.

Grid pry outs lock over top of gridwork. Auxiliary suspension required to building structure.

Lengths of 12-ft. and less to use one housing with two ends pre-installed.

Lengths over 12-ft. will be engineered to job requirements using multiple housings with one end pre-installed at each row end.

Lengths over 12-ft. will include appropriate job required quick-connect plug-thru wire harnesses and housing joiners.

Wiring access plate provided on top. End plates have 7/8" KO.

Certificate of Safety Compliance and Listings

Luminaire: UL and CUL listed 1598 and bears their label. Suitable for damp locations.

IC Rated.

CCEA option meets the City of Chicago Environmental Air specifications.

Warranty

5-year limited warranty is standard. Special 10-year warranty available on a job-to-job basis. Complete LED warranty terms available at www.mercltg.com.

Actual performance may differ as a result of end-user environment and application.

Most LED luminaires are suitable to operate in ambient temperatures from -20C (-4F) to 25C (77F).

The following exclusions apply: Luminaires with standby lighting option, integral lighting control options, or wireless control options. Consult factory.


LM-79 testing was measured under a controlled 25C (77F) ambient operating temperature.




MLS4-G Series | LIGHTSTREAMS 4

Architectural Linear LED Illuminating System | Recessed Mount for Grid Ceilings


Grid Ceiling Types and Dimensions

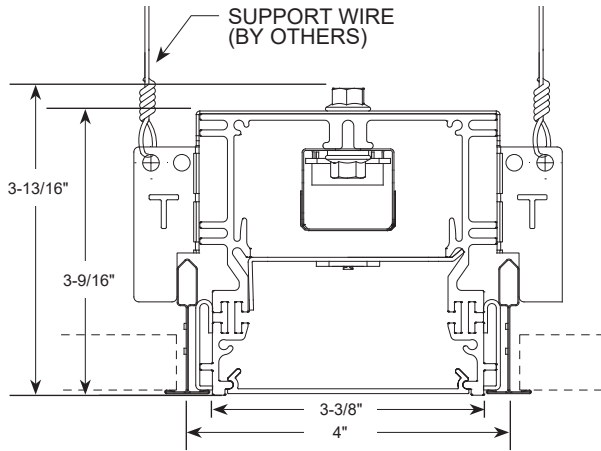


G9
9/16" GRID

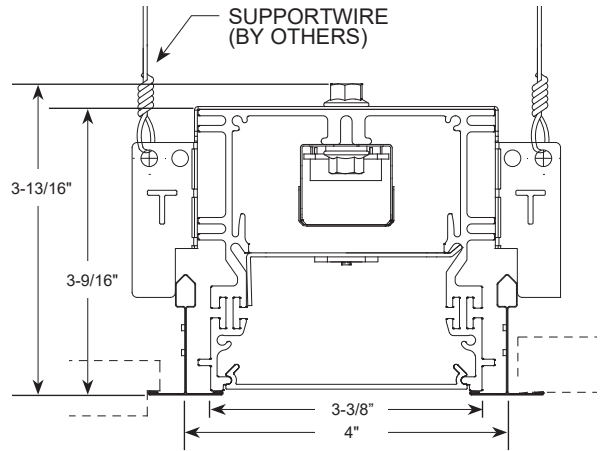


G
15/16" GRID

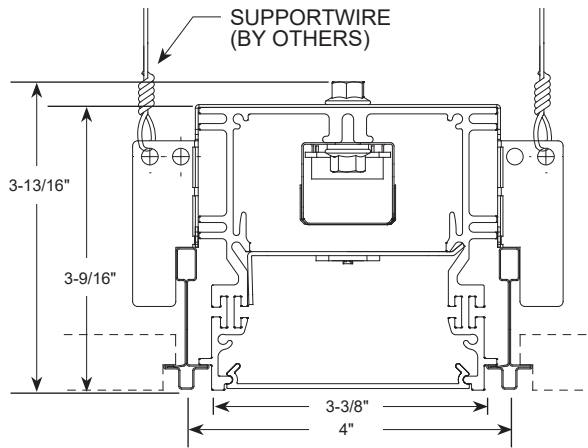


S
INTERLUDE

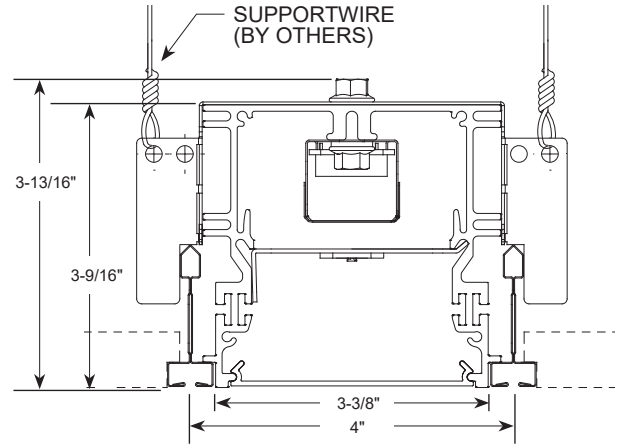

S
SCREW SLOT

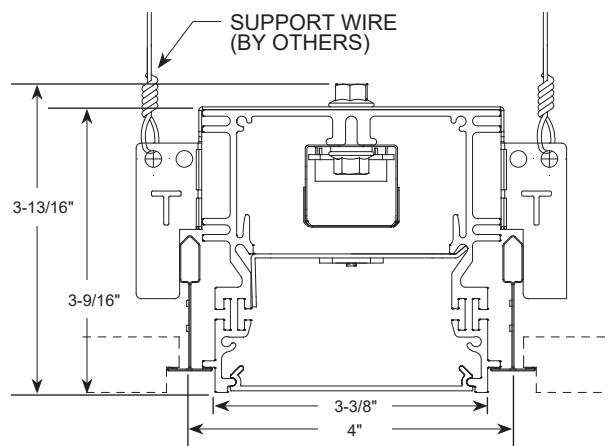

T9
9/16" GRID
TEGULAR TILE

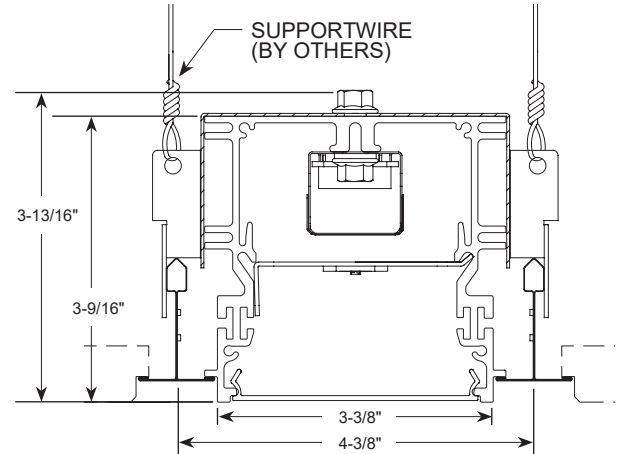

T
15/16" GRID
TEGULAR TILE

