

## CUP TRACK LUMINAIRE



### MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating

### STANDARD COLORS

White, Gray, Black

### SOURCE INFORMATION

WATTAGE	32W/49W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F

### ADJUSTABLE ANGLE

Tilt 90°  
Rotation 355°


### TYPE OF LED

COB

### WARRANTY

50 000 hours at 77 °F


### DIMENSIONS

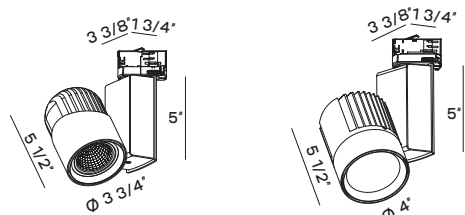

CUP1 (32W)

CUP2 (49W)

### PHOTOMETRICS

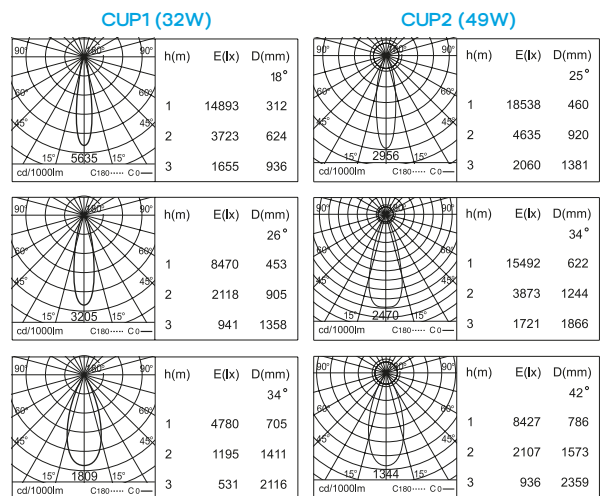

Fixture type:

Job information:



## PRODUCT DEFINITION SHEET

1	2	3	4	5
6	7	8	9	10

1	2	3	4	5	6
SERIES	WATTAGE	LUMEN OUTPUT	BEAM ANGLE	FINISH	COLOR TEMP
<input type="checkbox"/> CUP	<input type="checkbox"/> 32W	<input type="checkbox"/> 3500 lm	<input type="checkbox"/> 18°	<input type="checkbox"/> <input type="checkbox"/> W White	<input type="checkbox"/> 90 CRI
		<input type="checkbox"/> 3400 lm	<input type="checkbox"/> 26°	<input type="checkbox"/> <input type="checkbox"/> G Grey	<input type="checkbox"/> 27K
		<input type="checkbox"/> 3400 lm	<input type="checkbox"/> 34°	<input type="checkbox"/> <input type="checkbox"/> B Black	<input type="checkbox"/> 30K
	<input type="checkbox"/> 49W	<input type="checkbox"/> 5300 lm	<input type="checkbox"/> 25°	<input type="checkbox"/> <input type="checkbox"/> C Custom	<input type="checkbox"/> 35K
		<input type="checkbox"/> 5400 lm	<input type="checkbox"/> 34°		<input type="checkbox"/> 40K
		<input type="checkbox"/> 5200 lm	<input type="checkbox"/> 42°		

Custom powder coat color matching is available for a setup fee.

Consult Mercury Lighting for additional information.

7	8	9	10
MOUNTING	DRIVER	DRIVER LOCATION	VOLTAGE
<input type="checkbox"/> TR Track	<input type="checkbox"/> V010-1 0-10V, dim to 1%	<input type="checkbox"/> RE Remote	<input type="checkbox"/> UNIV 120VAC-277 VAC

For other dimming options contact Mercury