

ROUND PENDANT DIRECT LUMINAIRE



MATERIAL

Aluminum Extrude, Electrostatic Powder Coating
 REFLECTOR: PC
 COVER: Aluminum Anodized Gold

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	14W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F


TYPE OF LED

COB


WARRANTY

50 000 hours at 77 °F

MOUNTING

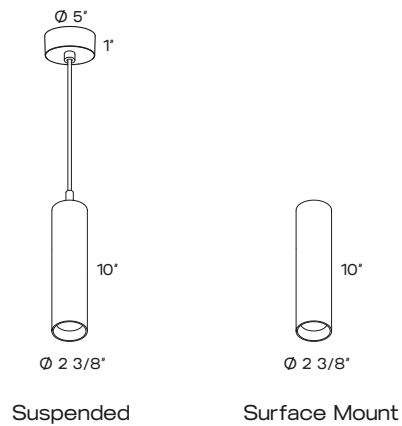

PHOTOMETRICS

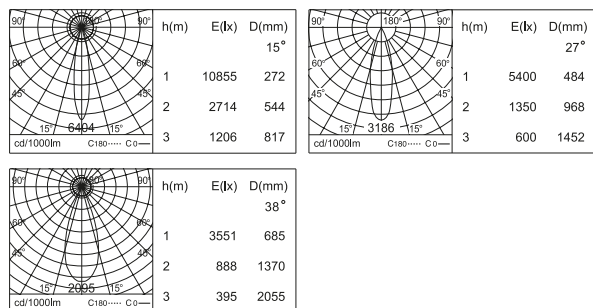

Fixture type:

Job information:

PRODUCT DEFINITION SHEET



1	2	3	4	5
6	7	8	9	10

1	2	3	4	5
SERIES	MOUNTING	WATTAGE	LUMEN OUTPUT	COLOR TEMP
<input type="checkbox"/> CYL2	<input type="checkbox"/> DS Suspended <input type="checkbox"/> SM Surface mount	<input type="checkbox"/> 14W	<input type="checkbox"/> 1100 lm	90 CRI <input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K

6	7	8	9
FINISH	BEAM ANGLE	DRIVER	VOLTAGE
<input type="checkbox"/> <input type="checkbox"/> W White <input type="checkbox"/> <input type="checkbox"/> G Grey <input type="checkbox"/> <input type="checkbox"/> B Black <input type="checkbox"/> <input type="checkbox"/> C Custom	<input type="checkbox"/> 15° <input type="checkbox"/> 27° <input type="checkbox"/> 38°	<input type="checkbox"/> V010-1 0-10V, dim to 1% For other dimming options contact Mercury	<input type="checkbox"/> UNIV 120VAC-277 VAC

Custom powder coat color matching is available for a setup fee.

Consult Mercury Lighting for additional information.



10
HANGING ACCESSORIES
<input type="checkbox"/> SC Round 5" standard. <input type="checkbox"/> RP5-24* Round 5"canopy, 24" long 1/2" dia. stem. <input type="checkbox"/> SP5-24* Square 5"canopy, 24" long 1/2" dia. stem.

*For remote driver location



HANGING ACCESSORIES

STEM SETS



PART #	DESCRIPTION
RP5-24	Round 5"canopy, Hanging hardware, 24" long 1/2" dia. stem.
SP5-24	Square 5"canopy, Hanging hardware, 24" long 1/2" dia. stem.

Other stem lengths available. Consult factory.