


ROUND PENDANT DIRECT LUMINAIRE



MOUNTING

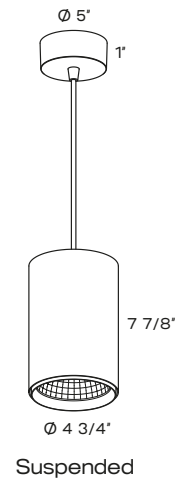

MATERIAL

Aluminum Die-Casting, Electrostatic Powder Coating
REFLECTOR: Aluminum Anodized Specular Silver

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	31W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F




TYPE OF LED

COB

WARRANTY

50 000 hours at 77 °F

PHOTOMETRICS



Fixture type:

Job information:

--	--

PRODUCT DEFINITION SHEET



1	2	3	4	5
6	7	8	9	10

1	2	3	4	5
SERIES	MOUNTING	WATTAGE	LUMEN OUTPUT	COLOR TEMP
<input type="checkbox"/> CYL4	<input type="checkbox"/> DS Suspended	<input type="checkbox"/> 31W	<input type="checkbox"/> 3000 lm	<input type="checkbox"/> 90 CRI <input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K

6	7	8	9
FINISH	BEAM ANGLE	DRIVER	VOLTAGE
<input type="checkbox"/> <input type="checkbox"/> W White <input type="checkbox"/> <input type="checkbox"/> G Grey <input type="checkbox"/> <input type="checkbox"/> B Black <input type="checkbox"/> <input type="checkbox"/> C Custom	<input type="checkbox"/> 12° <input type="checkbox"/> 20° <input type="checkbox"/> 38°	<input type="checkbox"/> V010-1 0-10V, dim to 1% For other dimming options contact Mercury	<input type="checkbox"/> UNIV 120VAC-277 VAC


Custom powder coat color matching is available for a setup fee.

Consult Mercury Lighting for additional information.

10 HANGING ACCESSORIES

- SC Round 5" standard.
- RP5-24* Round 5" canopy, 24" long 1/2" dia. stem.
- SP5-24* Square 5" canopy, 24" long 1/2" dia. stem.

*For remote driver location

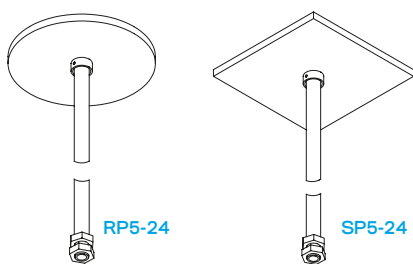

PART #	DESCRIPTION
RP5-24	Round 5" canopy, Hanging hardware, 24" long 1/2" dia. stem.
SP5-24	Square 5" canopy, Hanging hardware, 24" long 1/2" dia. stem.

Other stem lengths available. Consult Mercury Lighting.