

FLUTE TRACK LUMINAIRE



MATERIAL

Aluminum, Electrostatic Powder Coating

ADJUSTABLE ANGLE

Tilt 90°
Rotation 355°

STANDARD COLORS

White, Gray, Black

TYPE OF LED

COB

SOURCE INFORMATION

INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F

WARRANTY

50 000 hours at 77 °F

Fixture type:

Job information:

<input type="text"/>	<input type="text"/>
----------------------	----------------------

PRODUCT DEFINITION SHEET



1	2	3	4	5	6
7	8	9	10	11	





1	2	3	4	5	6
SERIES	MODEL	WATTAGE	LUMEN OUTPUT	BEAM ANGLE	FINISH
<input type="checkbox"/> FLUTE	<input type="checkbox"/> FLT1	<input type="checkbox"/> 14W	<input type="checkbox"/> 1400 lm <input type="checkbox"/> 1300 lm <input type="checkbox"/> 1300 lm	<input type="checkbox"/> 15° <input type="checkbox"/> 28° <input type="checkbox"/> 39°	<input type="checkbox"/> W White <input type="checkbox"/> G Grey <input type="checkbox"/> B Black <input type="checkbox"/> C Custom
	<input type="checkbox"/> FLT2	<input type="checkbox"/> 23W	<input type="checkbox"/> 2500 lm	<input type="checkbox"/> 27° <input type="checkbox"/> 38°	<p>Custom powder coat color matching is available for a setup fee.</p> <p>Consult Mercury Lighting for additional information.</p>
	<input type="checkbox"/> FLT3	<input type="checkbox"/> 20W	<input type="checkbox"/> 2200 lm <input type="checkbox"/> 2200 lm <input type="checkbox"/> 2330 lm	<input type="checkbox"/> 20° <input type="checkbox"/> 30° <input type="checkbox"/> 50°	
	<input type="checkbox"/> FLT4	<input type="checkbox"/> 20W	<input type="checkbox"/> 2200 lm <input type="checkbox"/> 2200 lm <input type="checkbox"/> 2300 lm	<input type="checkbox"/> 20° <input type="checkbox"/> 30° <input type="checkbox"/> 50°	
	<input type="checkbox"/> FLT5	<input type="checkbox"/> 27W	<input type="checkbox"/> 2900 lm <input type="checkbox"/> 3000 lm <input type="checkbox"/> 3000 lm	<input type="checkbox"/> 20° <input type="checkbox"/> 30° <input type="checkbox"/> 50°	
	<input type="checkbox"/> FLT6	<input type="checkbox"/> 27W	<input type="checkbox"/> 2900 lm <input type="checkbox"/> 3000 lm <input type="checkbox"/> 3100 lm	<input type="checkbox"/> 20° <input type="checkbox"/> 30° <input type="checkbox"/> 50°	
	<input type="checkbox"/> FLT7	<input type="checkbox"/> 28W	<input type="checkbox"/> 600 lm	<input type="checkbox"/> 5°-19°	

7	8	9	10
COLOR TEMP	MOUNTING	DRIVER	DRIVER LOCATION
<input checked="" type="checkbox"/> 90 CRI <input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> TR Track	<input type="checkbox"/> V010-1 0-10V, dim to 1% For other dimming options contact Mercury	<input type="checkbox"/> RE Remote




11
VOLTAGE
<input type="checkbox"/> UNIV 120VAC-277 VAC

DIMENSIONS & PHOTOMETRICS





FLT1

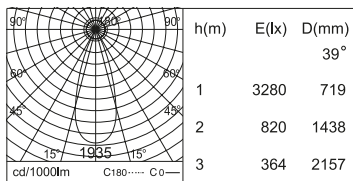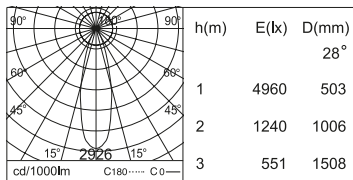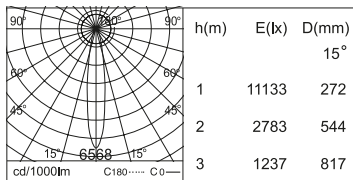

FLT2


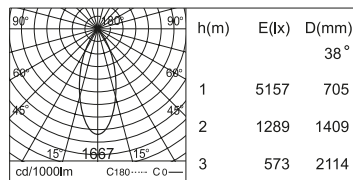
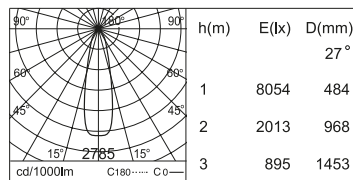



FLT3 Y FLT4

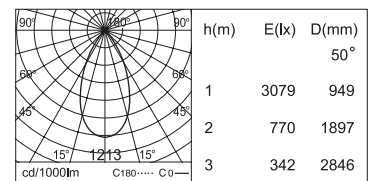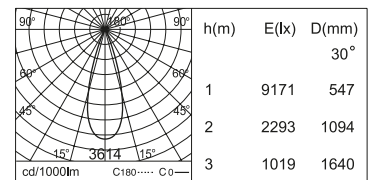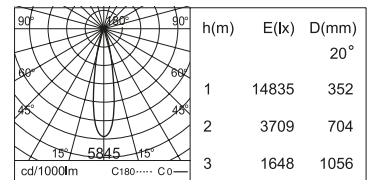



DIMENSIONS & PHOTOMETRICS

FLT5 Y FLT6

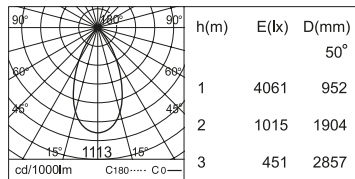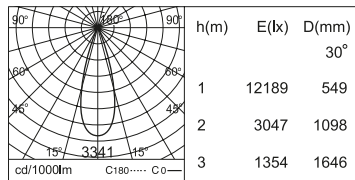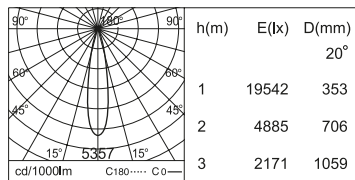

FLT7



h (m)	Iris IN Ø 4 mm _5.8°		Iris IN Ø 12 mm _7.7°		Iris Ø 20 mm _10.7°		Iris Ø 28 mm _14.7°		Iris Ø 35 mm _19.4°	
	D(mm)	E(lx)	D(mm)	E(lx)	D(mm)	E(lx)	D(mm)	E(lx)	D(mm)	E(lx)
1	-	449	135	3 801	188	5 943	258	6 022	342	6 168
2	-	112	269	950	376	1 486	515	1 505	684	1 542
3	-	50	404	422	564	660	773	669	1 026	685