


LIGHTSTREAMS

MLD2-N5/F SERIES ⚡ LIGHTNING PROGRAM

DROP OR FLAT LENS
RECESSED MOUNT FOR DRYWALL CEILINGS

Architectural Linear LED Illuminating System | LIGHTSTREAMS 2

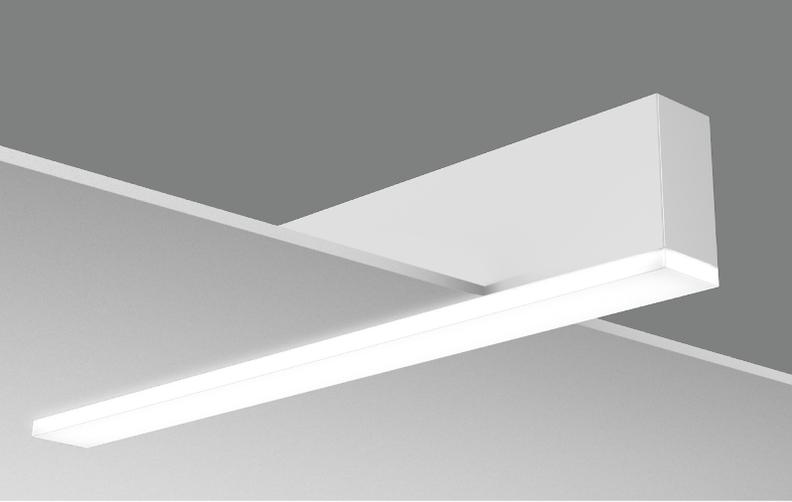

Features

- Extruded aluminum housing for perfectly straight lines of light.
- Narrow profile; 1-7/8-inch width.
- Linear lengths; 2-ft. and above in increments of one-inch.
- Custom formulated high diffusion extruded acrylic lens.
- Featured lens is a 1/2-inch drop style.
- Optional: 1-inch or 1-1/2-inch drop lens.
- Optional: flat style lens.
- Non-glare matte- white polyester powder coating finish.
- Recessed for drywall ceiling types; trimless or overlapping flange trim.
- Cataloged standard or custom set lumens-per-foot performances.
- 80 CRI standard. 90 CRI available.
- IC rated.
- CCEA option available.
- Fixture lumens per watt ratios up to 117.
- Tunable white feature optional.
- Standard and custom corners.
- American Made.
- Lightning Program eligible (ships in 15 days or less); See ordering data for options. ⚡



Performance

Based on 4Ft. Module, 3500K, 80 CRI- Signify LV6 LED Boards



Lumens per Foot	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
A05 LENS			
400	1600	15.0	107
500	2000	18.7	107
625	2500	23.5	106
825	3300	31.5	105
950	3800	36.6	104
A10 LENS			
400	1600	14.3	112
500	2000	17.9	112
625	2500	22.5	111
825	3300	29.9	110
1000	4000	36.8	109
A15 LENS			
400	1600	13.7	117
500	2000	17.1	117
625	2500	21.5	116
825	3300	28.5	116
1025	4100	35.8	115

Multiplier for other Color Temp (K)

- 3000K 97%
- 3500K 100%
- 4000K 102%
- 5000K 103%



Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

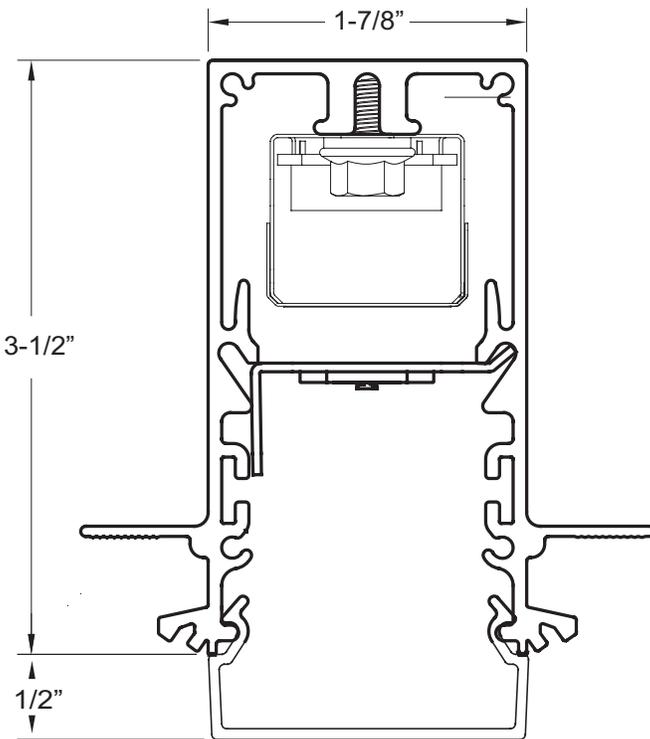

Fixture Type:

Job Information:

MLD2-N5/F Series | LIGHTSTREAMS 2

Architectural Linear LED Illuminating System | Drop or Flat Lens | Recessed Mount For Drywall Ceilings

Ex: MLD2-N5-144-825-35K-A10-1%-U-EM12-WL

Options

Series	Mounting	Module or Row Length	Lumens/Ft	Color Temp	Diffuser	Driver	Voltage	Standby Modules*	Misc.
MLD2 LightStreams 2	N5 Trimless Plaster-In for 5/8" Drywall	48 48" Length	A05 LENS 400 500 625 825 950	30K 35K 40K	A05 1/2" Drop	1% 0-10% Dimming	U Uni 120V-277V	EM7 EM10 EM12	WL UL "Suitable for Wet Locations" labeled.
LP-MLD2 Lightning Program	N1 Trimless Plaster-In for 1/2" Drywall	96 96" Length	625 825 950 A10 LENS 400 500 625 825 1000 A15 LENS 400 500 625 825 1025	50K Upon Request	A10 1" Drop	1% DD 0-10% Dimming Dim to Dark	1 120V	No Option	CCEA Meets the City of Chicago Environmental Air specifications.
	F Overlapping Flange Trim	144 144" Length	Custom or Row Length. 24" and above in 1" increments. Ex. in inches: 82, 384, etc.	TW 27K-65K	A15 1-1/2" Drop	SR Sensor Ready (Required for Certain Controls, Contact Factory)	7 277V		
			Custom Lumen Package. Contact Factory	927K 930K 935K 940K	ASO Flat	eL eldoLED Solo 0.1%	X As Specified		
						LDE1 Lutron Hi-Lume			
						As Specified			

 All options highlighted in BLUE are eligible for [Lightning Program](#) (same quality product, shipped in 15 days or less)

*Available in modules of 4-ft. and longer. / Maximum 625 Lumens per foot packages.

Housings

Extruded aluminum profile in a 0.080-inch wall thickness. Maximum length of each linear component is 12-ft.

.060 aluminum ends are provided where needed at row termini.

A one-piece 14GA galvanized steel joiner/aligner bracket is provided for each joint between housings.

Internal cold-rolled steel components.

Housing intended for recessing into drywall type ceilings systems.

Trimless housing for plaster-in or overlapping flange trim. See ceiling types section.

A custom formulated non-glare matte-white polyester powder coating provides an extremely durable and long lasting finish.

Diffusers

Seamless fit diffusers. Flawless and consistent end-to-end fit.

Extruded from custom formulated acrylic smooth opal material.

Allows maximum light transmission while eliminating pixilation and hot spots.

Standard diffuser is 1/2-inch drop style.

Optional diffusers; 1-inch or 1-1/2-inch drop style or flat style.

Smooth finish compliments the architectural elements.

LED Modules

High performance linear configured LED module boards.

Each board consists of multiple mid-power, high efficacy LEDs in a precise layout eliminating the need for supplemental heat sinking.

The boards produce an even and diffuse light which maximizes optical efficiency.

Compatible with the dimming performance of the LED driver.

Color temperatures available 80 CRI: 3000K, 3500K and 4000K. Upon request: 5000K.

Color temperatures available 90 CRI: 2700K, 3000K, 3500K and 4000K.

Tunable White Option

Field tunable range 2700K through 6500K.

80CRI..

LED Drivers

Factory programmable constant current LED power supply.

Multiple standard drive current outputs (factory set by Mercury) are cataloged with their corresponding lumens-per-foot offering. Upon request, custom drive current outputs and lumens-per-foot options are available.

Note: Certain cataloged lumens-per-foot offerings may be provided with a non-programmable constant current LED power supply at Mercury's discretion. Contact factory if critical.

Universal voltage input, 120V-277V, 50HZ-60HZ.

Continuous dimming capability down to 1%-standard.

0.1% available upon request.

Dim to Dark option available upon request. .

Sensor ready (SR) drivers compatible with most lighting controls are optional. Consult factory.

Lutron driver available: LDE1 series. (Limited to 625 Lumens per foot packages).

Standby Lighting Options

Self contained module, 7W, 10W or 12W as specified.

Battery backup upon loss of power. Available in modules of 4-ft. and longer. (Limited to 625 Lumens per foot packages).

Corners

Standard 90 degree corners.

Custom angled corners.

Installations

Designed for recessed installation into drywall type ceiling systems.

See ceiling types section for typical installations.

Trimless housing requires plastering-in after installation.

Overlapping trim neatly closes off drywall opening.

For all recessed grid applications see appropriate specification sheets for those ceiling types.

Lengths of 12-ft. and less to use one housing with two ends pre-installed.

Lengths over 12-ft. will be engineered to job requirements using multiple housings with one end pre-installed at each row end.

Lengths over 12-ft. will include appropriate job required quick-connect plug-thru wire harnesses and housing joiners.

Wiring access plate provided on top. End plates have 7/8" KO.

Certificate of Safety Compliance and Listings

Luminaire: UL and CUL listed 1598 and bears their label. Suitable for damp locations.

IC rated.

Optional: Suitable for wet locations marking is available. Some limitations apply. Contact factory for all details.

CCEA option meets the City of Chicago Environmental Air specifications.

Warranty

5-year limited warranty is standard. Special 10-year warranty available on a job-to-job basis. Complete LED warranty terms available at www.mercltg.com.

Actual performance may differ as a result of end-user environment and application.

Most LED luminaires are suitable to operate in ambient temperatures from -20C (-4F) to 25C (77F).

The following exclusions apply: Luminaires with standby lighting option, integral lighting controls options, or wireless control options. Consult factory.

LM-79 testing was measured under a controlled 25C (77F) ambient operating temperature.

Lightning Program

Same quality product, shipped in 15 days or less (if drawings are required, 15 days or less starts after drawings are released).

Entire order must qualify for [Lightning Program](#) in order to meet freight charges. Please contact our sales team if unsure your order will qualify.

Options highlighted in Blue, 500 linear feet or less, are eligible for quick ship [Lightning Program](#).

Relates to straight runs ONLY.

Other variations not highlighted in blue may be available under [Lightning Program](#). Please consult factory.

Specify LP-MLD2 when placing order if you would like to use [Lightning Program](#).



MLD2-N5/F Series | LIGHTSTREAMS 2

Architectural Linear LED Illuminating System | Drop or Flat Lens | Recessed Mount For Drywall Ceilings

Dimensional Data

