


LIGHTSTREAMS

MLR2-N5/F SERIES ⚡ LIGHTNING PROGRAM


REGRESSED LENS
RECESSED MOUNT FOR DRYWALL CEILINGS

Architectural Linear LED Illuminating System | LIGHTSTREAMS 2

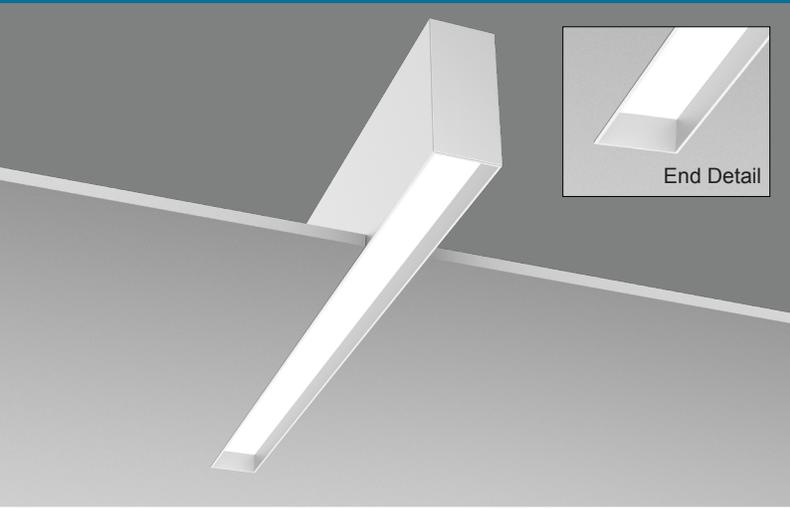

Features

- Extruded aluminum housing for perfectly straight lines of light.
- Narrow profile; 1-7/8-inch width.
- Linear lengths; 2-ft. and above in increments of one-inch.
- Custom formulated high diffusion extruded acrylic lens.
- Architecturally-pleasing 3/4" regression.
- Non-glare matte-white polyester powder coating finish.
- Recessed for drywall ceiling types; trimless or overlapping flange trim.
- Cataloged standard or custom set lumens-per-foot performances.
- 80 CRI standard. 90 CRI available.
- Continuous dimming capability down to 1% on 0-10V controls.
- IC rated.
- CCEA option available.
- Fixture lumens per watt ratios up to 89.
- Tunable white feature optional.
- Standard and custom corners
- American Made.
- Lightning Program eligible (ships in 15 days or less): See ordering data for options. ⚡

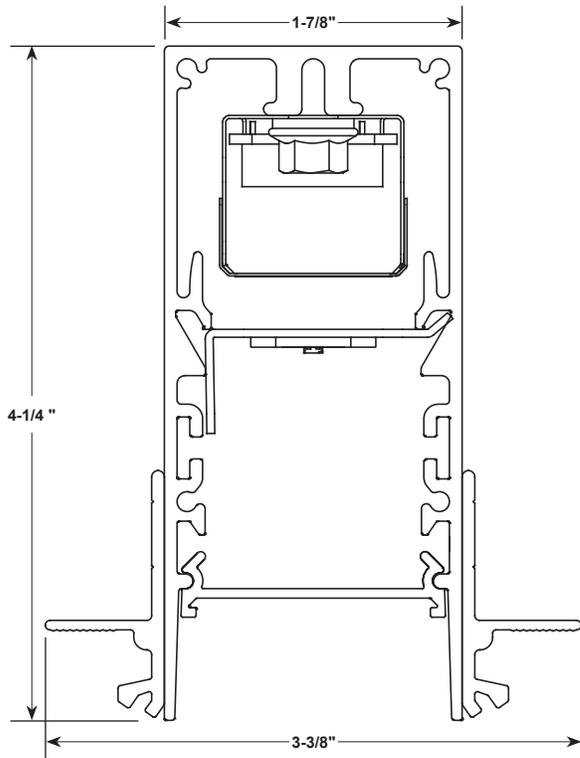

Performance - HTA

Based on 4Ft. Module, 3500K, 80 CRI, HTA diffuser- Signify LV6 LED Boards

Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	18.0	89
500	2000	22.8	88
625	2500	28.9	87
800	3200	36.6	87

Multiplier for other Color Temp (K)

3000K	97%
3500K	100%
4000K	102%
5000K	103%



Performance - ASO

Based on 4Ft. Module, 3500K, 80 CRI, ASO diffuser- Signify LV6 LED Boards


Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	22.1	72
500	2000	28.0	71
600	2400	34.0	71

Multiplier for other Color Temp (K)

3000K	97%
3500K	100%
4000K	102%
5000K	103%




Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.




Fixture Type:

Job Information:


Dimensional Data

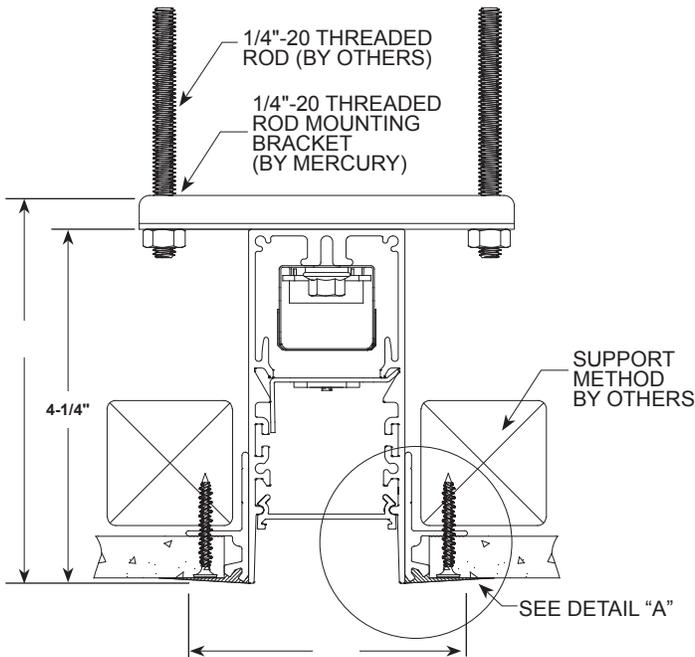

**N1
TRIMLESS FIT
FOR 1/2" DRYWALL**
(REQUIRES PLASTERING-IN
AFTER INSTALLATION BY OTHERS)

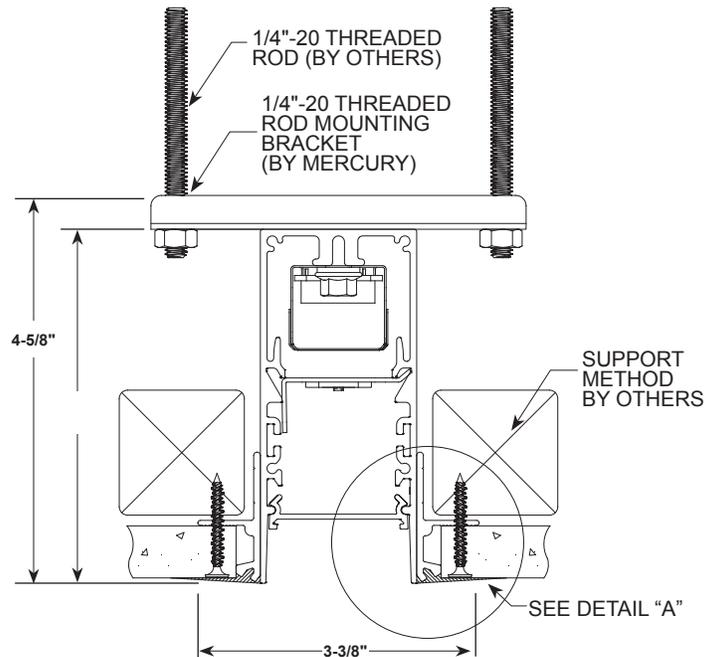


**N5
TRIMLESS FIT
FOR 5/8" DRYWALL**
(REQUIRES PLASTERING-IN
AFTER INSTALLATION BY OTHERS)




DETAIL "A"

**N1/N5
MUD & TAPE
BY OTHER**



DETAIL "B"

**F
OVERLAPPING
TRIM**

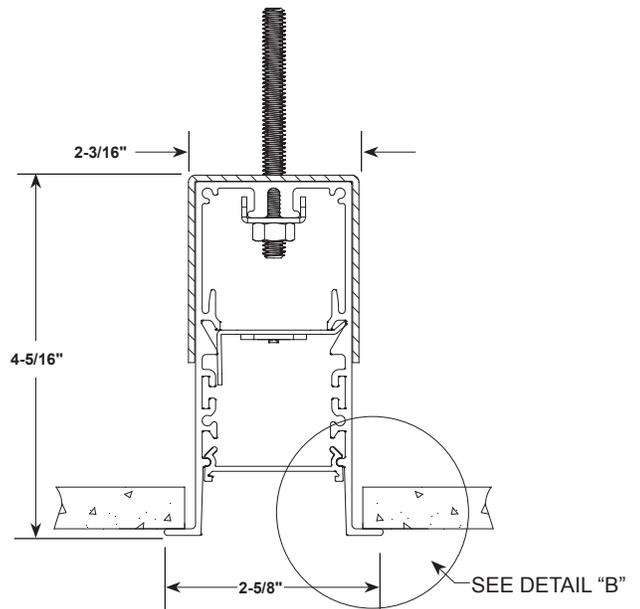

**F
OVERLAPPING TRIM**

