


# LIGHTSTREAMS

MLS3-N5/F SERIES ⚡ LIGHTNING PROGRAM


RECESSED MOUNT  
FOR DRYWALL CEILINGS

## Architectural Linear LED Illuminating System | LIGHTSTREAMS 3

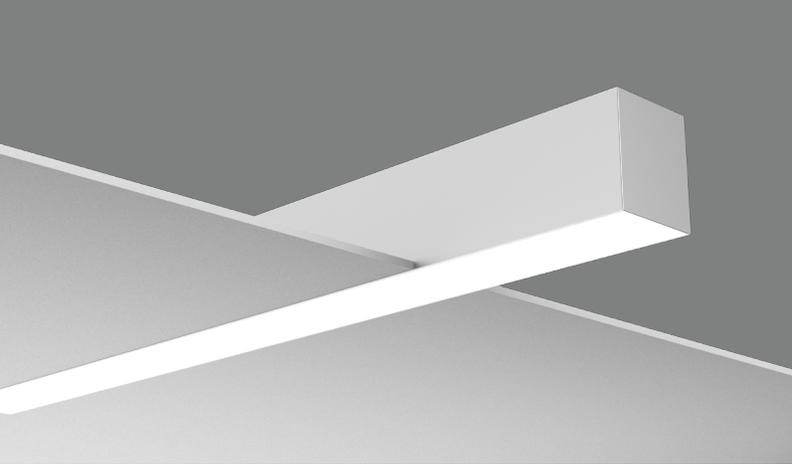

### Features

- Extruded aluminum housing for perfectly straight lines of light.
- Narrow 3-inch wide profile.
- Linear lengths; 2-ft. and above in increments of one inch.
- Custom formulated high diffusion extruded acrylic lens.
- Non-glare matte-white polyester powder coating finish.
- Recessed for drywall ceiling types; trimless or overlapping flange trim.
- Cataloged standard or custom set lumens-per-foot performances.
- 80 CRI standard. 90 CRI available.
- Continuous dimming capability down to 1% on 0-10V controls.
- IC rated.
- CCEA option available.
- Fixture lumens per watt ratios up to 121.
- Tunable white feature optional.
- Lighting controls and sensors.
- Standard and custom corners.
- American Made.
- Lightning Program eligible (ships in 15 days or less): See ordering data for options. ⚡

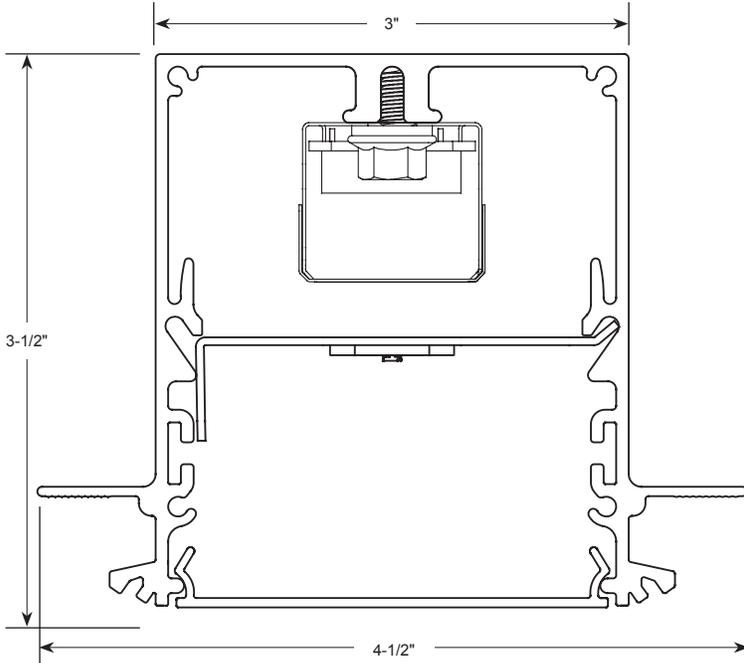

### Performance - HTA

Based on 4Ft. Module, 3500K, 80 CRI, HTA diffuser-Signify LV6 LED Boards

Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	13.2	121
500	2000	16.5	121
625	2500	20.8	120
825	3300	28.1	117
950	3800	32.7	116
1100	4400	38.5	114

Multiplier for other Color Temp (K)

3000K	97%
3500K	100%
4000K	102%
5000K	103%



Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

### Performance - ASO

Based on 4Ft. Module, 3500K, 80 CRI, ASO diffuser-Signify LV6 LED Boards


Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	16.5	97
500	2000	20.8	96
625	2500	26.6	94
890	3560	39.3	91

Multiplier for other Color Temp (K)

3000K	97%
3500K	100%
4000K	102%
5000K	103%



Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.




Fixture Type:


Job Information:



**Dimensional Data**

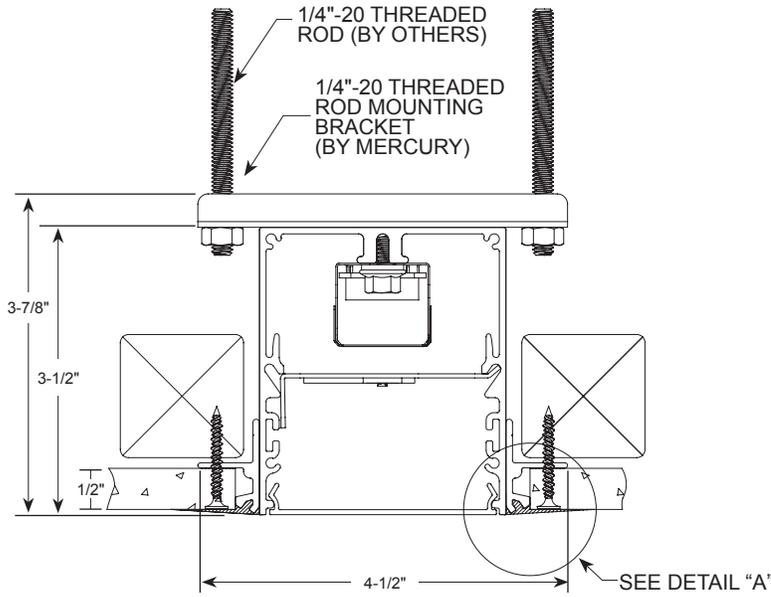

**N1**  
 TRIMLESS FIT  
 FOR 1/2" DRYWALL  
 (REQUIRES PLASTERING-IN  
 AFTER INSTALLATION BY OTHERS)

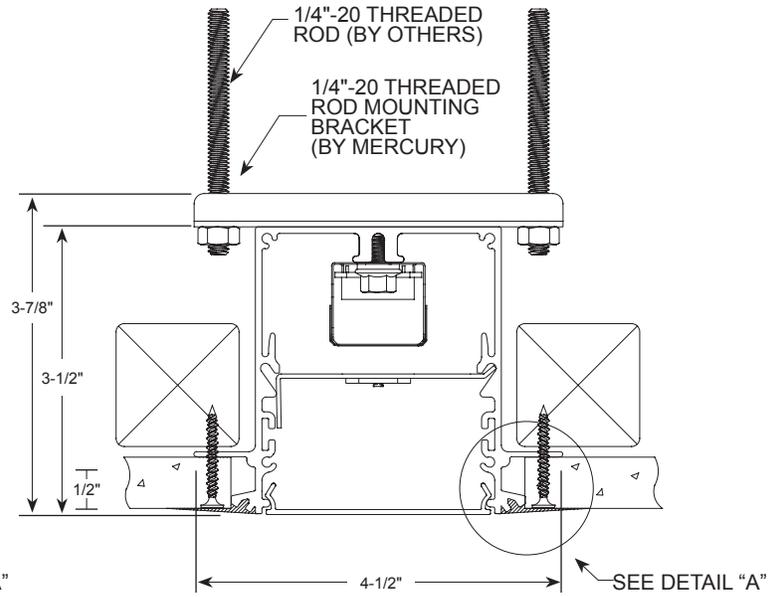

**N5**  
 TRIMLESS FIT  
 FOR 5/8" DRYWALL  
 (REQUIRES PLASTERING-IN  
 AFTER INSTALLATION BY OTHERS)

