


LIGHTSTREAMS

MLS3-I SERIES ⚡ LIGHTNING PROGRAM


SUSPENDED INDIRECT

Architectural Linear LED Illuminating System | LIGHTSTREAMS 3

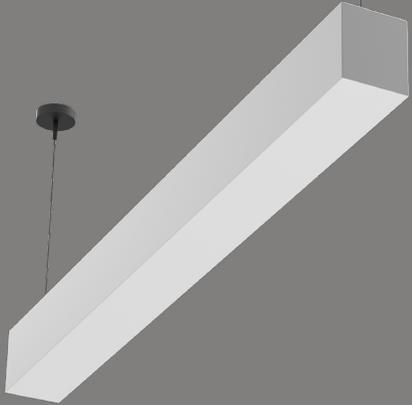

Features

- Indirect uplighting while being suspended from a ceiling.
- Extruded aluminum housing for perfectly straight lines of light.
- Narrow 3-inch wide profile.
- Linear lengths; 2-ft. and above in increments of one inch.
- Custom formulated high diffusion extruded acrylic lens.
- Non-glare matte-white polyester powder coating finish.
- Cable mount from ceiling.
- Cataloged standard or custom set lumens-per-foot performances.
- 80 CRI standard. 90 CRI available.
- Continuous dimming capability down to 1% on 0-10V controls.
- Fixture lumens per watt ratios up to 121.
- Tunable white feature optional.
- Lighting controls and sensors.
- Standard and custom corners
- American Made.
- Lightning Program eligible (ships in 15 days or less): See ordering data for options. ⚡

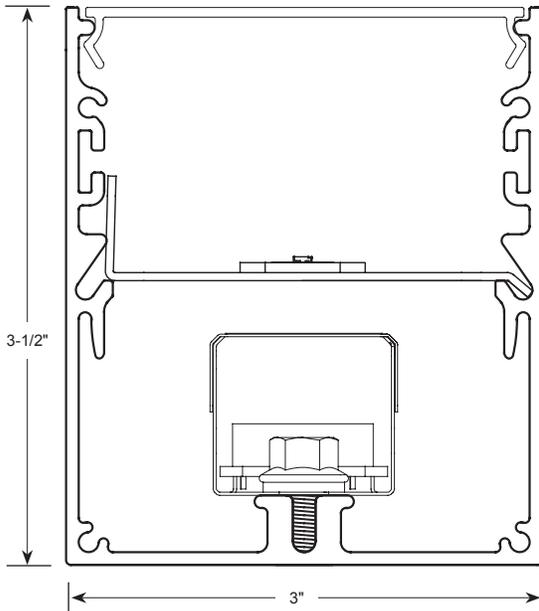

Performance - HTA

Based on 4Ft. Module, 3500K, 80 CRI, HTA diffuser-Signify LV6 LED Boards

Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	13.2	121
500	2000	16.5	121
625	2500	20.8	120
825	3300	28.1	117
950	3800	32.7	116
1100	4400	38.5	114

Multiplier for other Color Temp (K)
 3000K 97%
 3500K 100%
 4000K 102%
 5000K 103%



Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

Performance - ASO


Based on 4Ft. Module, 3500K, 80 CRI, ASO diffuser-Signify LV6 LED Boards

Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	16.5	97
500	2000	20.8	96
625	2500	26.6	94
890	3560	39.3	91

Multiplier for other Color Temp (K)
 3000K 97%
 3500K 100%
 4000K 102%
 5000K 103%



Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.



Fixture Type: Job Information:

MLS3-I Series | LIGHTSTREAMS 3

Architectural Linear LED Illuminating System | Suspended Indirect

Ex: MLS3-I-144-825-35K-HTA-1%-U-EM12-S1

Options

Series	Mounting	Module or Row Length	Lumens/Ft	Color Temp	Diffuser	Driver	Voltage	Standby Modules*	Lighting Controls	Custom Hanging Points
MLS3 LightStreams 3 LP-MLS3 Lightning Program	I Indirect Suspended	48 48" Length	400 500 625 825 950 1100	30K 35K 40K 50K Upon Request TW 27K-65K	HTA High Transmission Acrylic ASO Acrylic Smooth Opal (Performance is reduced with this diffuser)	1% 0-10% Dimming	U Uni 120V-277V	EM7 EM10 EM12	S1 Philips EasySense (Bluetooth)	As Specified
		96 96" Length	80 CRI	50K Upon Request TW 27K-65K		1% DD 0-10% Dimming Dim to Dark	1 120V	No Option	S11 Enlighted Micro (SU5ECL)	Custom Paint Colors
		144 144" Length		90 CRI		SR Sensor Ready (Required for Certain Controls, Contact Factory)	7 277V		S12 Lutron Athena Node (Color-White)	As Specified
		Custom or Row Length. 24" and above in 1" Increments. Ex. in inches: 82, 384, etc.	Custom Lumen Packages. Lumen Packages with ASO diffuser. Contact Factory.			eL eldoLED Solo 0.1% LDE1 Lutron Hi-Lume	X As Specified		S13 Lutron Athena Node (Color-Black)	
									S14 Lutron Athena Sensor (Color-White)	
									S15 Lutron Athena Sensor (Color-Black)	
									017 Leviton PIR ZLS05-ILW	
									No Option	

 All options highlighted in BLUE are eligible for [Lightning Program](#) (same quality product, shipped in 15 days or less)

*Available in modules of 4-ft. and longer.

Housings

Extruded aluminum profile in a 0.080-inch wall thickness. Maximum length of each linear component is 12-ft. .060 aluminum ends are provided where needed at row termini.

A one-piece 14GA galvanized steel joiner/aligner bracket is provided for each joint between housings.

Internal cold-rolled steel components.

Standard or custom hanging points are provided.

A custom formulated non-glare matte-white polyester powder coating provides an extremely durable and long lasting finish.

Custom color finishes on request.

Diffusers

Seamless fit diffusers. Flawless and consistent end-to-end fit.

Standard diffuser: extruded from custom formulated high transmission white acrylic material. Allows maximum light transmission while eliminating pixilation and hot spots.

Optional diffuser: extruded from acrylic smooth opal material. Offers a more esthetically white appearance. Note: reduces performance by up to 25%.

Smooth finish on both diffusers compliments the architectural elements.

LED Modules

High performance linear configured LED module boards. Each board consists of multiple mid-power, high efficacy LEDs in a precise layout eliminating the need for supplemental heat sinking.

The boards produce an even and diffuse light which maximizes optical efficiency.

Compatible with the dimming performance of the LED driver.

Color temperatures available 80 CRI: 3000K, 3500K and 4000K. Upon request: 5000K.

Color temperatures available 90 CRI: 2700K, 3000K, 3500K and 4000K.

Tunable White Option

Field tunable range 2700K through 6500K.

80CRI.

LED Drivers

Factory programmable constant current LED power supply.

Multiple standard drive current outputs (factory set by Mercury) are cataloged with their corresponding lumens-per-foot offering. Upon request, custom drive current outputs and lumens-per-foot options are available.

Note: Certain cataloged lumens-per-foot offerings may be provided with a non-programmable constant current LED power supply at Mercury's discretion. Contact factory if critical.

Universal voltage input, 120V-277V, 50HZ-60HZ.

Continuous dimming capability down to 1%-standard.

0.1% available upon request.

Sensor ready (SR) drivers compatible with most lighting controls are optional. Consult factory.

Lutron drivers available: LDE1 series.

Standby Lighting Options

Self contained module, 7W, 10W or 12W as specified.

Battery backup upon loss of power. Available in modules of 4-ft. and longer.

Integral Lighting Controls

Various lighting controls and sensors are optional.

Consult factory.

Corners

Standard 90 degree corners.

Custom angled corners.

Lightning Program

Same quality product, shipped in 15 days or less (if drawings are required, 15 days or less starts after drawings are released).

Entire order must qualify for [Lightning Program](#) in order to meet freight charges. Please contact our sales team if unsure your order will qualify.

Options highlighted in Blue, 500 linear feet or less, are eligible for quick ship [Lightning Program](#).

Relates to straight runs ONLY.

Other variations not highlighted in blue may be available under [Lightning Program](#). Please consult factory.

Specify [LP-MLS3](#) when placing order if you would like to use [Lightning Program](#).

Installations

Designed to be suspended on cables.

Lengths of 12-ft. and less to use one housing with two ends pre-installed.

Lengths over 12-ft. will be engineered to job requirements using multiple housings with one end pre-installed at each row end.

Lengths over 12-ft. will include appropriate job required quick-connect plug-thru wire harnesses and housing joiners.

All individual modules or multiple module runs to include job required feed wire as specified.

Standard or custom hanging points will be provided per job specifications.

Certificate of Safety Compliance and Listings

Luminaire: UL and CUL listed 1598 and bears their label. Suitable for damp locations.

Warranty

5-year limited warranty is standard. Special 10-year warranty available on a job-to-job basis. Complete LED warranty terms available at www.mercltg.com.

Actual performance may differ as a result of end-user environment and application.


Most LED luminaires are suitable to operate in ambient temperatures from -20C (-4F) to 25C (77F).

The following exclusions apply: Luminaires with standby lighting option, integral lighting controls options, or wireless control options. Consult factory.


LM-79 testing was measured under a controlled 25C (77F) ambient operating temperature.



Dimensional Data

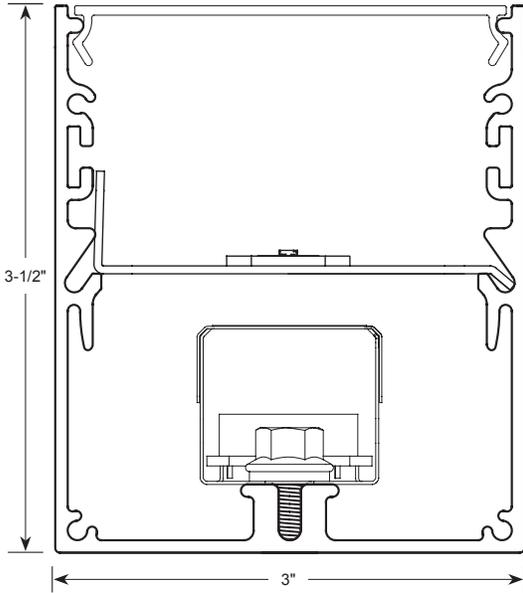


Mounting Information

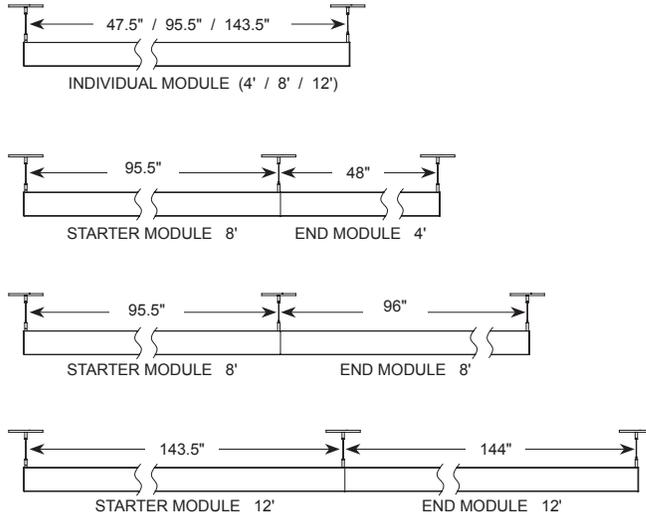

Consult factory for additional row length information

Hanging Accessories

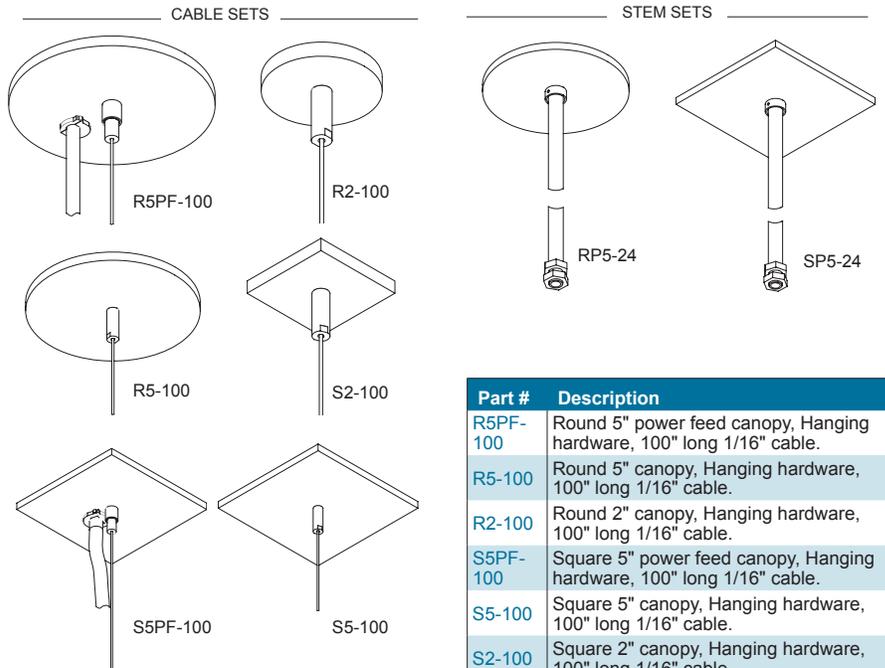

Part #	Description
R5PF-100	Round 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
R5-100	Round 5" canopy, Hanging hardware, 100" long 1/16" cable.
R2-100	Round 2" canopy, Hanging hardware, 100" long 1/16" cable.
S5PF-100	Square 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
S5-100	Square 5" canopy, Hanging hardware, 100" long 1/16" cable.
S2-100	Square 2" canopy, Hanging hardware, 100" long 1/16" cable.
RP5-24	Round 5" canopy, Hanging hardware, 24" long 1/2" dia. stem.
SP5-24	Square 5" canopy, Hanging hardware, 24" long 1/2" dia. stem.

Other cable and stem lengths available. Consult factory.

