


LIGHTSTREAMS

MLS3-I PoE SERIES

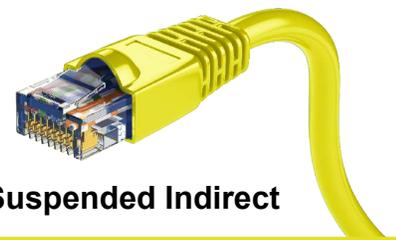

Suspended Indirect

Architectural Linear LED Illuminating System | LIGHTSTREAMS 3



Features

- Power over Ethernet (PoE) enabled as Molex CoreSync.
- Tunable white feature for standard system or PoE system.
- Extruded aluminum housing for perfectly straight lines of light.
- Narrow 3-inch wide profile.
- Linear lengths; 2-ft. and above in increments of one-inch.
- Indirect uplighting while being suspended from a ceiling.
- Custom formulated high diffusion extruded acrylic lens.
- Non-glare matte-white polyester powder coating finish.
- Cable mount from ceiling.
- Cataloged standard or custom set lumens-per-foot performances.
- 80 CRI standard. 90 CRI available.
- Fixture lumens per watt ratios up to 118.
- Lighting controls and sensors.
- Standard and custom corners.
- American Made.



Performance

Based on 4ft. Module, 3500K, 80 CRI, HTA diffuser



Lumens per Foot (LF)	Delivered Lumens (L)	System Watts (W)	Lumens per Watt (LPW)
400	1600	13.6	118
500	2000	17.1	117
625	2500	21.6	116
825	3300	29.3	113
950	3800	34.5	110
1100	4400	40.8	106

Multiplier for other Color Temp (K)

3000K	97%
3500K	100%
4000K	102%
5000K	103%



Actual performance may differ by +/- 5% when operating between 12V-42VDC.

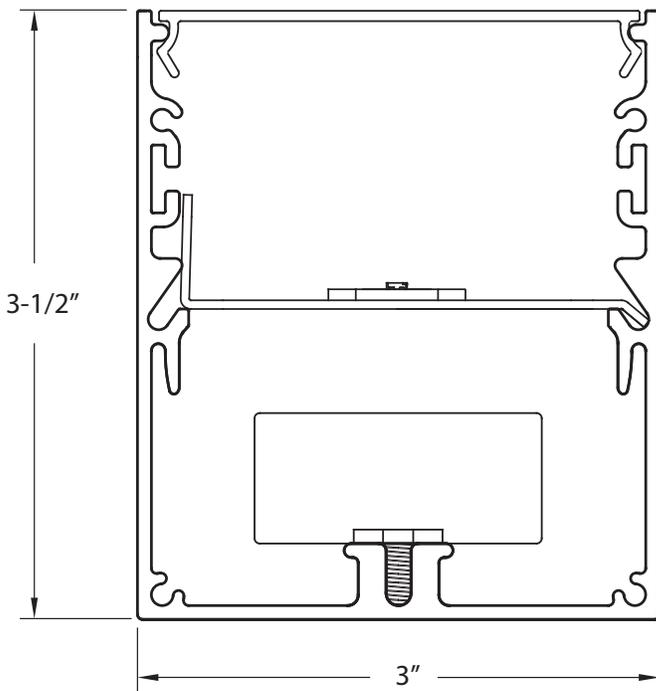

Fixture Type:

Job Information:



MLS3-I PoE Series | LIGHTSTREAMS 3

Architectural Linear LED Illuminating System | Suspended Indirect



Ex. MLS3-I-144-825-35K-HTA-40VDC-180996

Options										
MLS3	I	40VDC								
SERIES	MOUNTING	MODULE OR ROW LENGTH	LUMENS/ FT	COLOR TEMP	DIFFUSER	LED MODULES FORWARD VOLTAGE	MOLEX DRIVER	EMERGENCY LIGHTING	CUSTOM PAINT COLORS	CUSTOM HANGING POINTS
MLS3 LightStreams 3	I Indirect Suspended	48 48" Length 96 96" Length 144 144" Length Custom or Row Length, 24" and above in 1" increments. Ex. in inches 82, 384, etc.	400 500 625 825 950 1100 Custom Lumen Packages.	30K 35K 40K 50K Upon Request TW 27K-57K 927K 930K 935K 940K	HTA High Transmission Acrylic ASO Acrylic Smooth Opal (Performance is reduced with this diffuser)	40VDC	Single Channel 180996-XXXX-250-300mA 180996-XXXX-300-350mA 180996-XXXX-360-500mA 180996-XXXX-510-700mA 180996-XXXX-710-880mA 180996-XXXX-890-1050mA Dual Channel 180996-XXXX-300-350mA 180996-XXXX-360-500mA 180996-XXXX-510-700mA 180996-XXXX-710-880mA 180996-XXXX-890-1050mA	Single Channel CORESM-00350 CORESM-00500 CORESM-00700 CORESM-01050 CORESM-00880 Dual Channel COREDM-00350 COREDM-00500 COREDM-00700 COREDM-01050 COREDM-00880	As Specified	As Specified

Housings

Extruded aluminum profile in a 0.080-inch wall thickness. Maximum length of each linear component is 12-ft. .060 aluminum ends are provided where needed at row termini. A one-piece 14GA galvanized steel joiner/aligner bracket is provided for each joint between housings. Internal cold-rolled steel components. A custom formulated non-glare matte-white polyester powder coating provides an extremely durable and long lasting finish. Custom color finished on request.

Diffusers

Seamless fit diffusers. Flawless and consistent end-to-end fit. Standard diffuser: extruded from custom formulated high transmission white acrylic material. Allows maximum light transmission while eliminating pixilation and hot spots. Optional diffuser: extruded from acrylic smooth opal material. Offers a more esthetically white appearance. Note: reduces performance by up to 25%. Smooth finish on both diffusers compliments the architectural elements.

LED Modules

High performance linear configured LED module boards. Each board consists of multiple mid-power, high efficacy LEDs in a precise layout eliminating the need for supplemental heat sinking. The boards produce an even and diffuse light which maximizes optical efficiency. Color temperatures available 80 CRI: 3000K, 3500K and 4000K. Upon request: 5000K. Color temperatures available 90 CRI: 2700K, 3000K, 3500K and 4000K.

Tunable White Option

Field tunable range 2700K through 5700K. 80CRI.

Integral Lighting Controls

Various lighting controls and sensors are optional. Consult factory.

PoE Drivers

UL 2108 Listed. Plenum Rated. LED output voltage range 12-42VDC. Class 2 rated electrical device. Available in both single channel and dual channel. Efficiency: 92% (typical) at 52VDC input, full load. Constant Current accuracy +/- 3%. Ambient temperature: 0 to 40°C (32 to 104°F). Storage temperature: -40 to 85°C (-40 to 185°F). Max case temperature: 75°C (167°F). Environmental rating: Indoor.

Dimming Performance- PoE Driver

Dimming: PWM
Dimming type: Linear
Dimming frequency: 500Hz
Dimming range: 1-100%

Molex- PoE Driver

The Molex CoreSync Programmable Smart LED Driver is a compact low voltage, DC/DC LED driver that can be programmed to specific power outputs, for driving Constant Current LED engines in a wide variety of light fixtures. Controlled, powered and integrated with a Molex CoreSync PoE Gateway. This DC system provides 71.3 usable watts at the powered device, it operates at 52 VDC and has an amperage allowance 1.73 amps. Using this product gives the end user the option of making their building a smart building combining IT and OT to one platform, while being able to control but not limited to cameras, shades, occupancy, traffic patterns and DLH.

CoreSync Emergency Lighting Bypass

UL 924 Compliant, Indoor Rated. Ambient operating temperature 0-40C (32-104F).

Electrical- ELB

EM input: 110-277 VAC.
Output: 12-42 VDC up to 1050MA.
Standby Power: 1W.

Operation-ELB

In the event of a power failure, PoE power source failure or disconnection of cabling, the module will bypass normal PoE control and activate the emergency power source. The fixture will power to full brightness and return to normal operation once the emergency has been cleared.

Corners

Standard 90-degree corners. Custom angled corners.

Installations

Designed to be suspended on cables. Lengths of 12-ft. and less to use one housing with two ends pre-installed. Lengths over 12-ft. will be engineered to job requirements using multiple housings with one end pre-installed at each row end. Lengths over 12-ft. will include appropriate job required quick-connect plug-thru wire harnesses and housing joiners. All individual modules or multiple module runs to include job required feed wire as specified. Standard or custom hanging points will be provided per job specifications.

Certificate of Safety Compliance and Listings

Luminaire: UL and CUL listed 1598 and bears their label. Suitable for damp locations.


Warranty

5-year limited warranty is standard. Special 10-year warranty available on a job-to-job basis. Complete LED warranty terms available at www.mercltg.com. Actual performance may differ as a result of end-user environment and application. Most LED luminaires are suitable to operate in ambient temperatures from -20C (-4F) to 25C (77F). The following exclusions apply: Luminaires with standby lighting option, integral lighting control options, or wireless control options. Consult factory. LM-79 testing was measured under a controlled 25C (77F) ambient operating temperature.






Dimensional Data


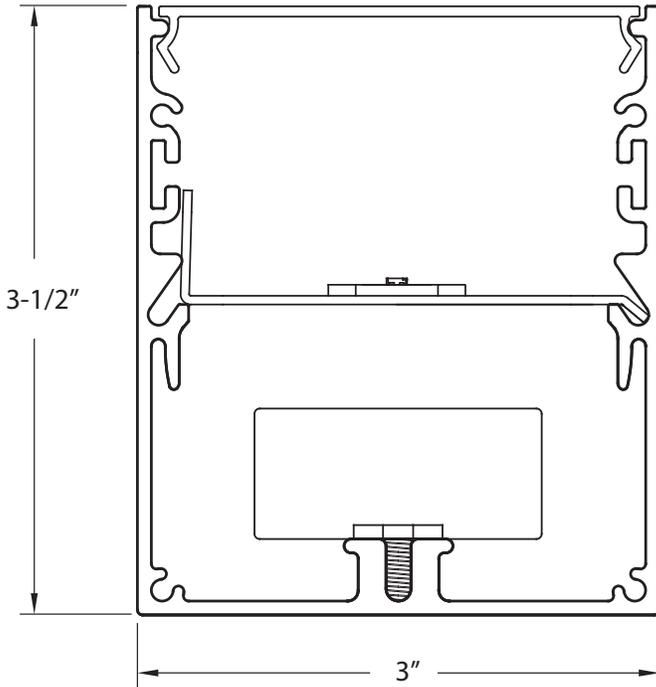


Mounting Information

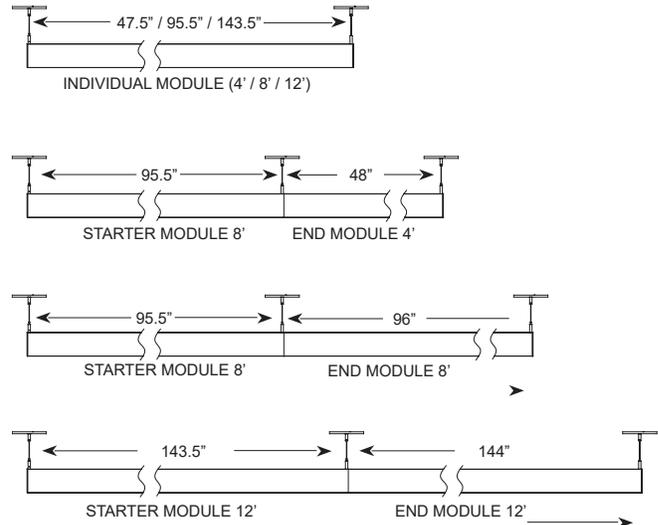

Consult factory for additional row length information

Hanging Accessories

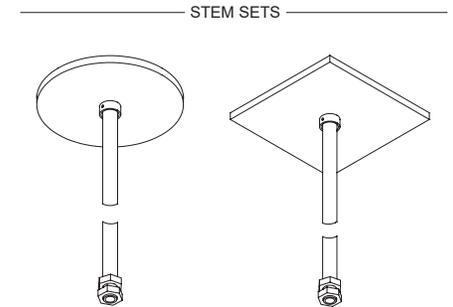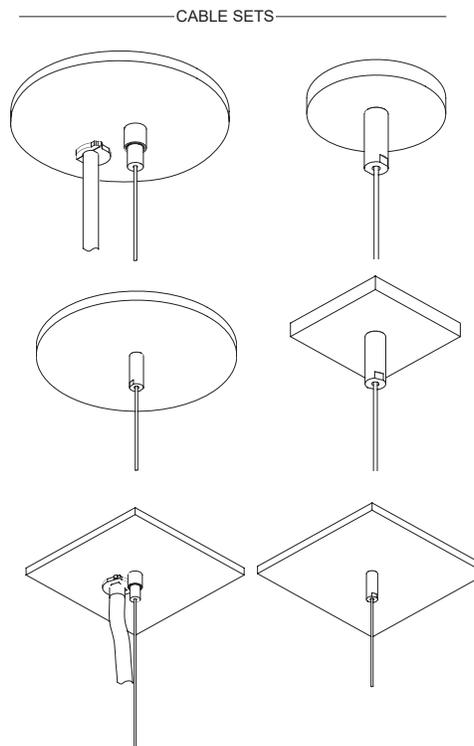

Part #	Description
R5PF-100	Round 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
R5-100	Round 5" canopy, Hanging hardware, 100" long 1/16" cable.
R2-100	Round 2" canopy, Hanging hardware, 100" long 1/16" cable.
S5PF-100	Square 5" power feed canopy, Hanging hardware, 100" long 1/16" cable.
S5-100	Square 5" canopy, Hanging hardware, 100" long 1/16" cable.
S2-100	Square 2" canopy, Hanging hardware, 100" long 1/16" cable.
RP5-24	Round 5" canopy, Hanging hardware, 24" long 1/2" dia. stem.
SP5-24	Square 5" canopy, Hanging hardware, 24" long 1/2" dia. stem.

Other cable and stem lengths available. Consult factory.

