



# LR5 SERIES

## Architectural Recessed 1X4 LED Volume Luminaire

Fixture Type:

Job Information:

### SPECIFICATIONS:

#### LED MODULES:

- High performance linear configured LED module boards.
- Each board consists of multiple mid-power, high efficacy LEDs in a precise layout eliminating the need for supplemental heat sinking.
- The boards produce an even and diffuse light which maximizes optical efficiency.
- Compatible with the dimming performance of the LED driver.
- Color temperatures available: 3000K, 3500K and 4000K.
- Upon request: 5000K.

#### LED DRIVERS:

- Factory programmable constant current LED power supply.
- Multiple standard drive current outputs (factory set by Mercury) are cataloged with their corresponding lumen package offerings. Upon request, custom drive current outputs and lumen packages are available.
- Note: Certain cataloged lumen packages may be provided with a non-programmable constant current LED power supply at Mercury's discretion. Contact factory if critical.
- Universal voltage input, 120V-277V, 50HZ-60HZ.
- Specification grade dimming down to 1% on 0-10V dimming controls.

#### LED LUMEN PACKAGES:

- Cataloged standard lumen packages. See attached chart for full details.
- Custom lumen packages pre-set are optional with programmable drivers only. Contact factory for details.

#### HOUSINGS:

- All metal parts are fabricated in a computer-controlled operation from heavy gauge code grade cold rolled steel.
- Rivets hold all parts together for strength and unity.
- A custom formulated non-glare white powder coating is applied to the housing after fabrication providing a reflectivity of at least 90%.

#### DIFFUSER:

- Architecturally squared-shape profile design.
- Extruded from custom formulated high transmission acrylic material.
- Linear ribbing for high LED performance.

#### STANDBY LIGHTING OPTION:

- Self contained module, 5W, 7W, 10W or 12W as specified. Battery backup upon loss of power.
- May not be available with some higher lumen packages. See Lumen package matrix.

#### INSTALLATIONS:

- Designed for installation into NEMA Type G lay-in acoustical grid ceiling systems, 1" grid or 9/16" fine-line grid.
- For NEMA Type F dry wall applications an additional flange kit must be used with Type G housing.
- Four pry-out style grid support clips are located on the housing sides.
- Four auxiliary suspension points are also provided for securing to building structure.
- A quick wiring access plate is located on back of the housing. Additional knockouts provided.
- Factory installed power whips as specified.

#### CERTIFICATE OF SAFETY

#### COMPLIANCE AND LISTINGS:

- Luminaire: UL and CUL listed 1598 and bears their label. Suitable for damp locations.
- IC rated. (Some higher lumen packages may not qualify. See Lumen Package matrix).

#### WARRANTY:

- 5-year limited warranty is standard. Special 10-year warranty available on a job-to-job basis. Complete LED warranty terms available at [www.mercltg.com](http://www.mercltg.com).
- Actual performance may differ as a result of end-user environment and application.
- Most LED luminaires are suitable to operate in ambient temperatures from -20C (-4F) to 25C (77F).
- The following exclusions apply: Luminaires with optional standby lighting option, integral lighting controls options, or wireless control options. Consult factory.
- LM-79 testing was measured under a controlled 25C (77F) ambient operating temperature.

### FEATURES:

- Shallow recessed 1X4 ambient LED luminaire featuring a single linear high transmission acrylic diffuser.
- Architecturally-squared shape diffuser envelops the LED light source allowing maximum light transmission while eliminating pixilations and hot spots.
- Delivers a balanced amount of horizontal and vertical illumination.
- Digital LED technology provides high efficacy and energy efficiency.
- Multiple power and light levels are offered as standard to allow meeting design and energy needs per application. Custom factory set levels available on request.
- Lumen maintenance; Reported L70 (hours) & L80 (hours) > 60,000.
- CRI greater than 80.
- Fixture lumens per watt ratios up to 125.
- American Made.
- Matching surface luminaire: LW5 Series.



# LR5 SERIES

Example: LR5-14G-6400-35K-1%-UNI-EM7

SERIES	NOMINAL LENGTH (FT)	NOMINAL LUMENS	COLOR TEMP	DRIVER	VOLTAGE	STANDBY LIGHTING OPTIONS	OPTIONS
<b>LR5</b>	<b>14G</b> 1x4 Module/Nema Type G/Lay in Grid, 1" or 9/16", Fine Line	<b>3300</b> <b>3800</b> <b>4200</b> <b>4500</b> <b>5000</b> <b>6400</b> <b>7300</b>  <b>XXXX</b> Custom Lumen Package. Contact Factory.	<b>30K</b> <b>35K</b> <b>40K</b>  <b>50K</b> Upon Request	<b>1%</b> 0-10V 1% Dimming  As Specified	<b>UNI</b>	<b>EM5</b> <b>EM7</b> <b>EM10</b> <b>EM12</b>	<b>FLX</b> 6Ft. Single Circuit Power Flex (Specify Voltage)  <b>FLX2</b> 6Ft. 2-Circuit Power Flex (Specify Voltage)

## LUMEN PACKAGE


Series	Module Size	Nominal Lumen Package	Color	Fixture Power (W)	Delivered Lumens	Fixture LPW	IC Rated	Standby Lighting Option
LR5	1X4							
		3300	3000K	28	3203	116	✓	✓
		3300	3500K	28	3253	118	✓	✓
		3300	4000K	28	3354	121	✓	✓
		3300	5000K	28	3455	125	✓	✓
		3800	3000K	32	3634	113	✓	✓
		3800	3500K	32	3691	115	✓	✓
		3800	4000K	32	3805	119	✓	✓
		3800	5000K	32	3919	122	✓	✓
		4200	3000K	37	4055	111	✓	✓
		4200	3500K	37	4119	113	✓	✓
		4200	4000K	37	4247	116	✓	✓
		4200	5000K	37	4374	120	✓	✓
		4500	3000K	40	4362	109	✓	✓
		4500	3500K	40	4431	111	✓	✓
		4500	4000K	40	4568	114	✓	✓
		4500	5000K	40	4705	118	✓	✓
		5000	3000K	45	4821	107	✓	✓
		5000	3500K	45	4897	108	✓	✓
		5000	4000K	45	5048	112	✓	✓
		5000	5000K	45	5200	115	✓	✓
		6400	3000K	57	6128	107	-	✓
		6400	3500K	57	6224	109	-	✓
		6400	4000K	57	6416	112	-	✓
		6400	5000K	57	6609	115	-	✓
		7300	3000K	61	6940	114	-	✓
		7300	3500K	61	7014	115	-	✓
		7300	4000K	61	7309	120	-	✓
		7300	5000K	61	7383	121	-	✓

Actual wattage may differ by +/- 5% when operating between 120V-277V +/- 10%.

## PHOTOMETRICS:

All photometric reports are available at [www.mercltg.com](http://www.mercltg.com).

## CROSS SECTIONS:

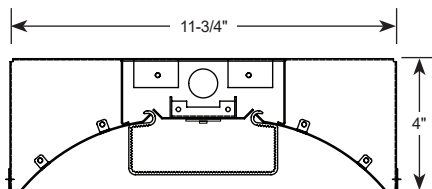

Detail

