

This document contains confidential and proprietary information and cannot not be reproduced or divulged, in whole or part, without authorization in writing by Mercury Architechural Lighting.



NSTALLATION INSTRUCTIONS DIR/ IND LIGHTCOVE SERIES

8/2/2018 3/4 FUL Size: 180411 Dwg. no.:

SHEET 1 OF 3

CATALOG NO:

LCKD

SPECIFICATIONS

LIGHTING -

DIRECT / INDIRECT

MOUNTING -

SURFACE WALL MOUNT

SIZE -

NOMINAL 7 5/8" W x 2" H x 48" OR 96" LENGTHS. CUSTOM LENGTHS AND CONTINUOUS RUNS AVAILABLE.

LED BOARDS -

UPLIGHT-3000K, 3500K OR 4000K COLOR TEMPERATURE LED BOARDS,80 CRI (STD.) OR 90 CRI. OUTPUT RANGES BETWEEN 400 AND 900 LÙMENS PER FOOT AS REQUIRED.

DOWNLIGHT-3000K.3500K OR 4000K COLOR TEMPERATURE CONSTANT VOLTAGE (24V) LED TAPE, 3WATTS/FT, 280LM/FT(3500k).

DRIVER-

UPLIGHT-ULT CONSTANT CURRENT DRIVER, 0-10V DIMMABLE TO 1%, 120V/277V INPUT, DRIVE CURRENT AS REQUIRED TO ACHIEVE SPECIFIED LUMEN OUTPUT

DOWNLIGHT-ERP 24V CONSTANT VOLTAGE POWER SUPPLY, 120-277V INPUT. OPTIONAL 0-10V DIMMING MODULE AVAILABLE.

REFLECTOR-

DIE FORMED ALUMINUM

LENS-

1/16" THICK CLEAR ACRYLIC DUST COVER EXTRUDED OPAL ACRYLIC LENS

MATERIAL-

HOUSING -EXTRUDED ALUMINUM, .125" WALL


FINISH-


MILL ALUMINUM READY FOR APPLICATION OF DRYWALL COMPOUND AND FIELD PAINTING ON JOBSITE


CERTIFICATION-


UL LISTED AND UNION MADE IN THE U.S.A.

Rev.	Description	Date	Ву

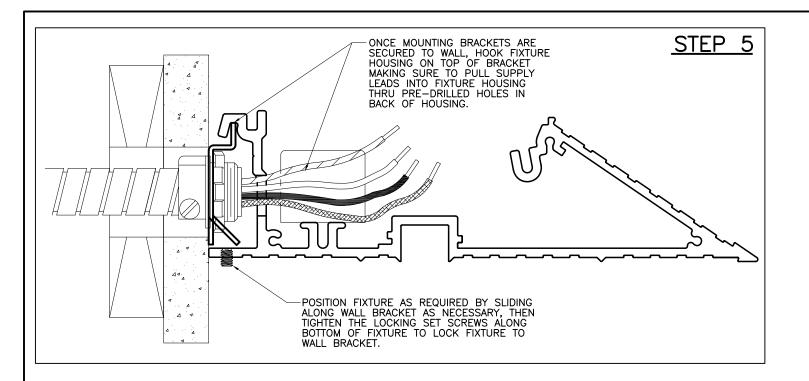

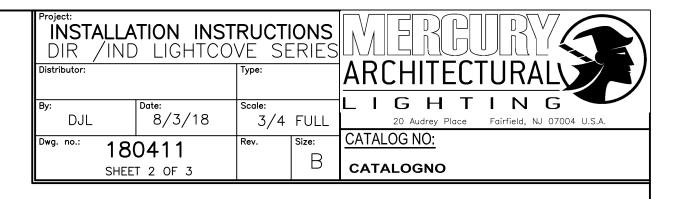


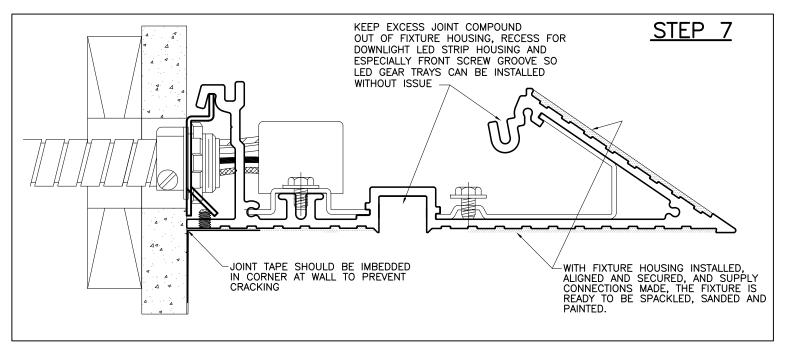


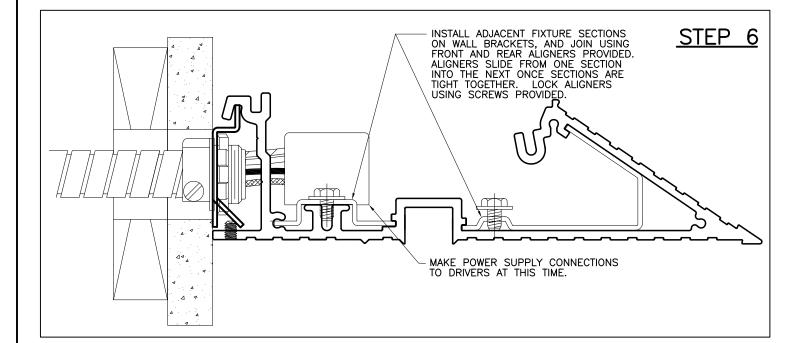



STEP 8-ONCE HOUSING IS SECURED, SPACKLED, SANDED AND PAINTED AS DIRECTED BY ARCHITECT, PROCEED TO STEP 9

This document contains confidential and proprietary information and cannot not be reproduced or divulged, in whole or part, without authorization in writing by Mercury Architechural Lighting.

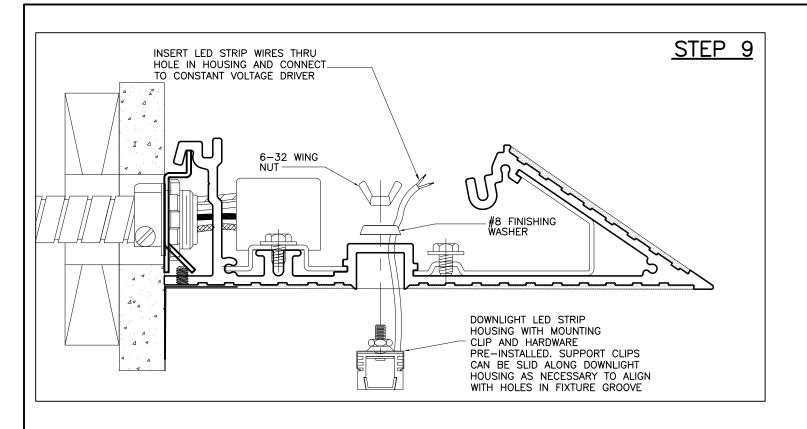

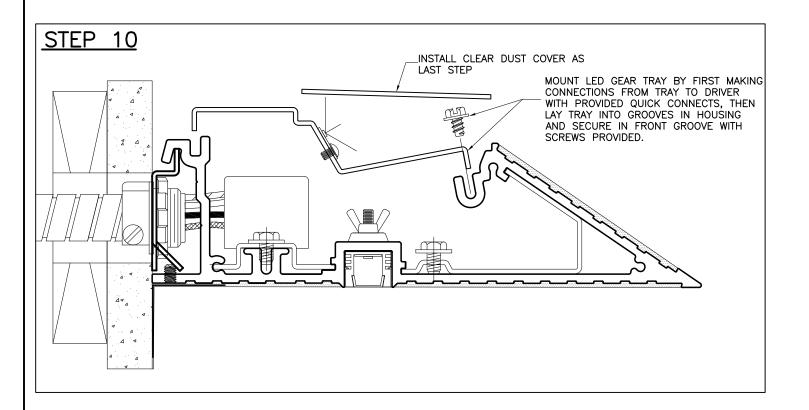

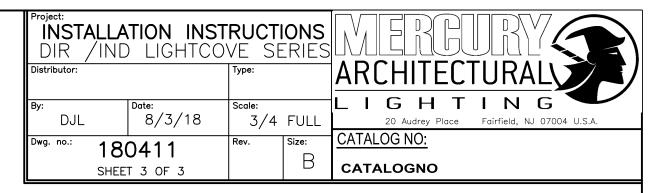

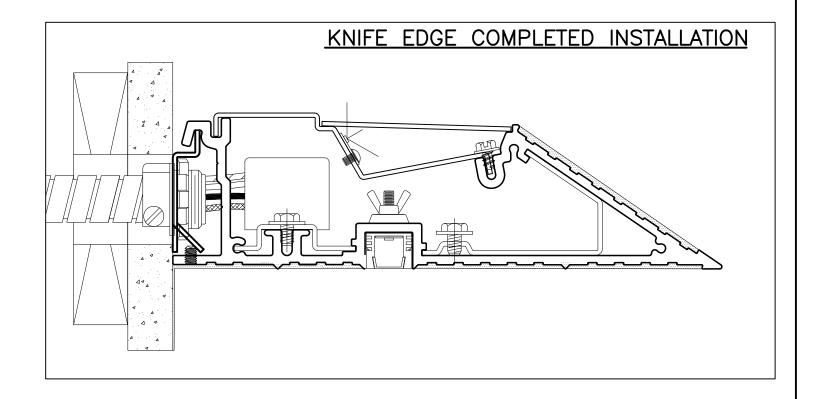

This document contains confidential and proprietary information and cannot not be reproduced or divulged, in whole or part, without authorization in writing by Mercury Architechural Lighting.