


LIGHTSTREAMS

MLD3-N5/F SERIES ⚡ LIGHTNING PROGRAM

DROP OR FLAT LENS
RECESSED MOUNT FOR DRYWALL CEILINGS

Architectural Linear LED Illuminating System | LIGHTSTREAMS 3

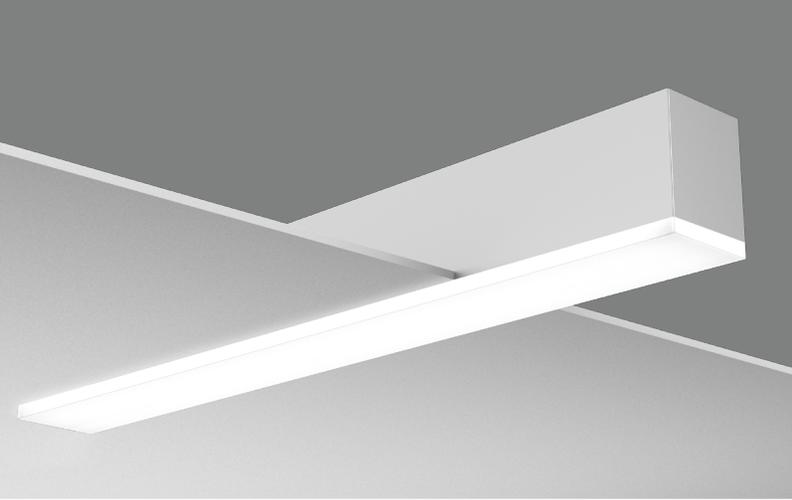

Features

- Extruded aluminum housing for perfectly straight lines of light.
- Narrow 3-inch wide profile.
- Linear lengths; 2-ft. and above in increments of one-inch.
- Custom formulated high diffusion extruded acrylic lens.
- Featured lens is a 1/2-inch drop style.
- Optional: 1-inch or 1-1/2-inch drop lens.
- Optional: flat style lens.
- Non-glare matte-white polyester powder coating finish.
- Recessed for drywall ceiling types; trimless or overlapping flange trim.
- Cataloged standard or custom set lumens-per-foot performances.
- 80 CRI standard. 90 CRI available.
- Continuous dimming capability down to 1% on 0-10V controls.
- IC rated.
- CCEA option available.
- Fixture lumens per watt ratios up to 123.
- Tunable white feature optional.
- Standard and custom corners.
- American Made.
- Lightning Program eligible (ships in 15 days or less): See ordering data for options. ⚡



Performance

Based on 4Ft. Module, 3500K, 80 CRI-Signify LV6 LED Boards



Lumens per foot (LF)	Total Lumens	Watts	LPW
A05 LENS			
400	1600	13.9	115
500	2000	17.4	115
625	2500	22.0	114
985	3940	36.3	109
A10 LENS			
400	1600	13.9	115
500	2000	17.4	115
625	2500	22.0	114
985	3940	36.3	109
A15 LENS			
400	1600	13.0	123
500	2000	16.2	123
625	2500	20.5	122
1050	4200	37.9	111

Multiplier for other Color Temp (K)

3000K	97%
3500K	100%
4000K	102%
5000K	103%



Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%. Consult Factory for 90 CRI performances.

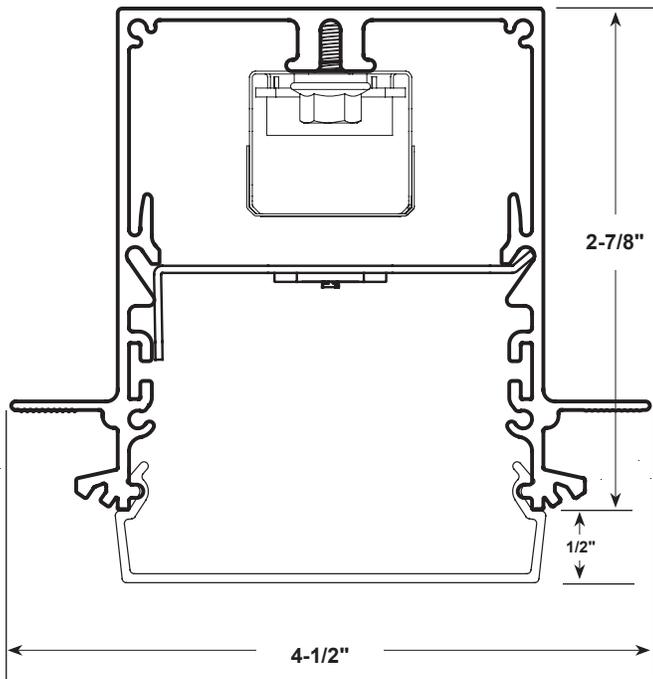



Fixture Type:		Job Information:	
---------------	--	------------------	--


MLD3-N5/F Series | LIGHTSTREAMS 3 

Architectural Linear LED Illuminating System | Drop or Flat Lens | Recessed Mount For Drywall Ceilings


Dimensional Data

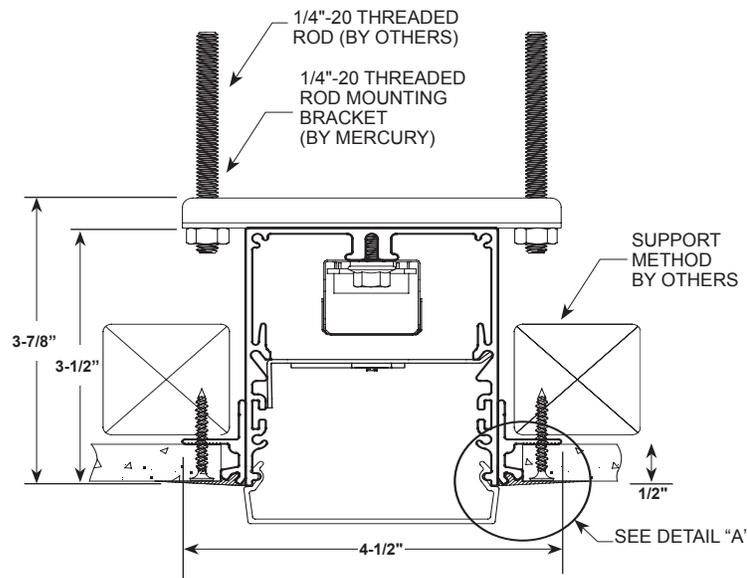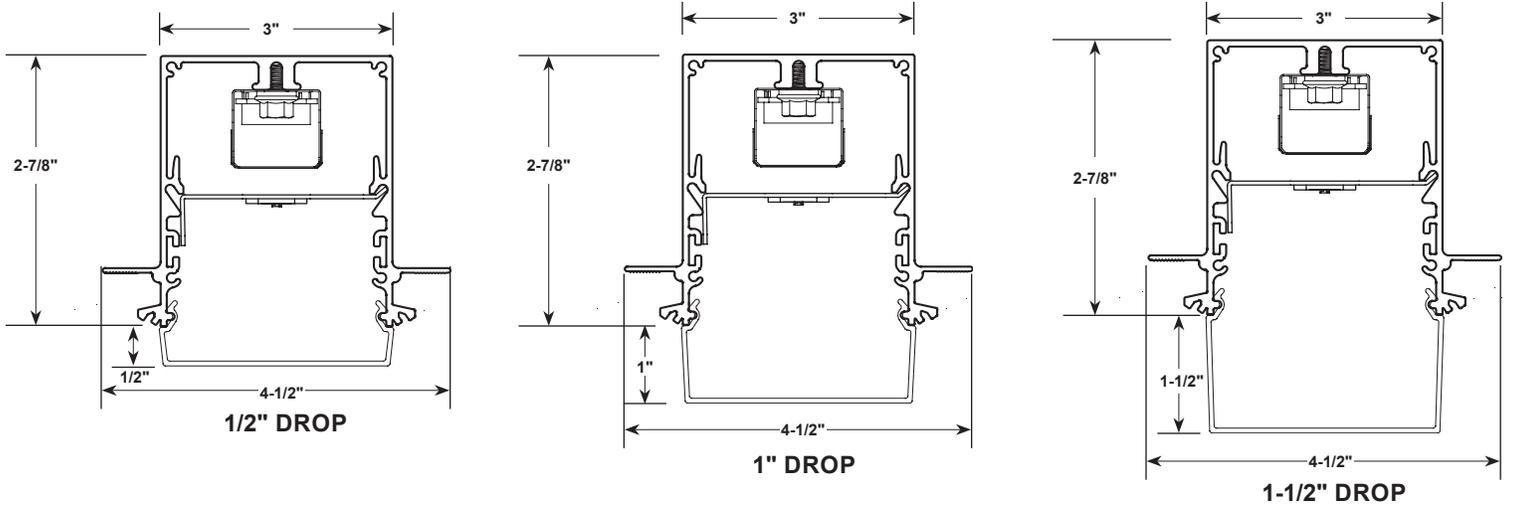


N1 TRIMLESS FIT FOR 1/2" DRYWALL
(REQUIRES PLASTERING-IN AFTER INSTALLATION BY OTHERS)

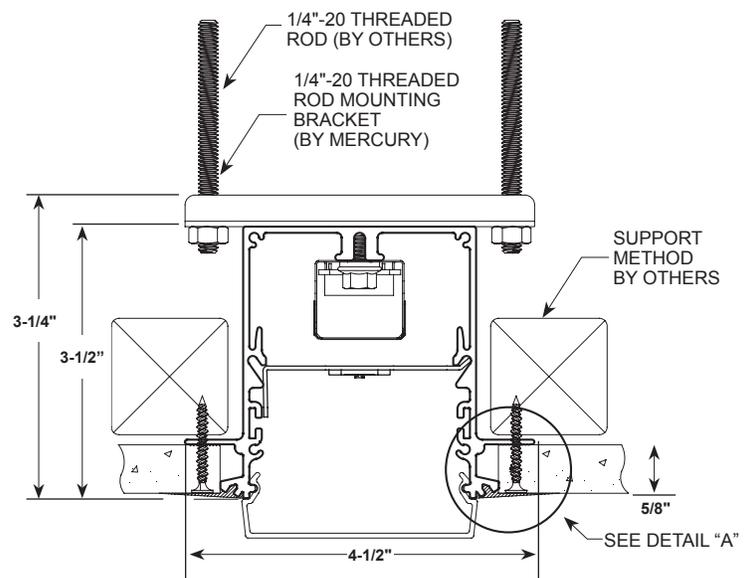



N5 TRIMLESS FIT FOR 5/8" DRYWALL
(REQUIRES PLASTERING-IN AFTER INSTALLATION BY OTHERS)



N1/N5 MUD & TAPE BY OTHER



F OVERLAPPING TRIM

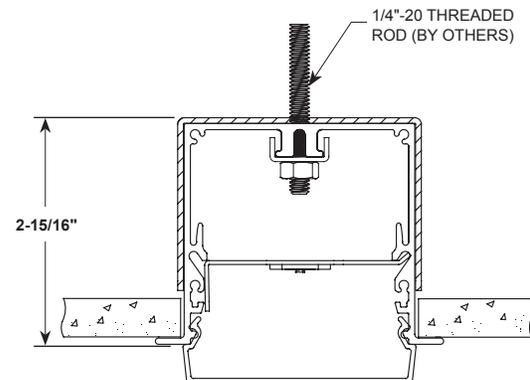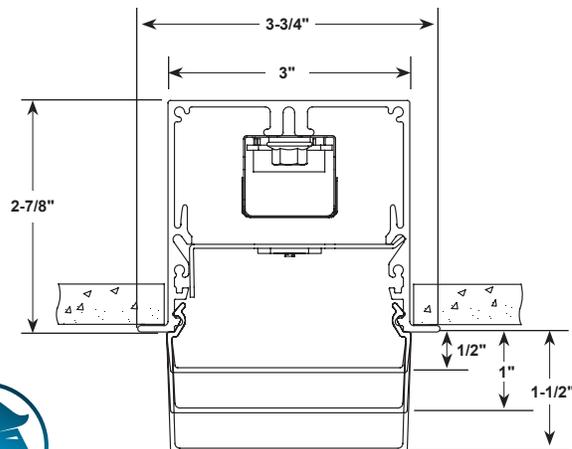

F Overlapping Trim

